

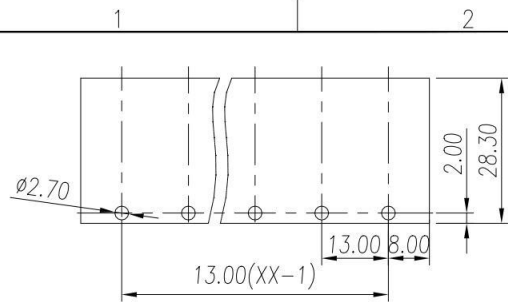


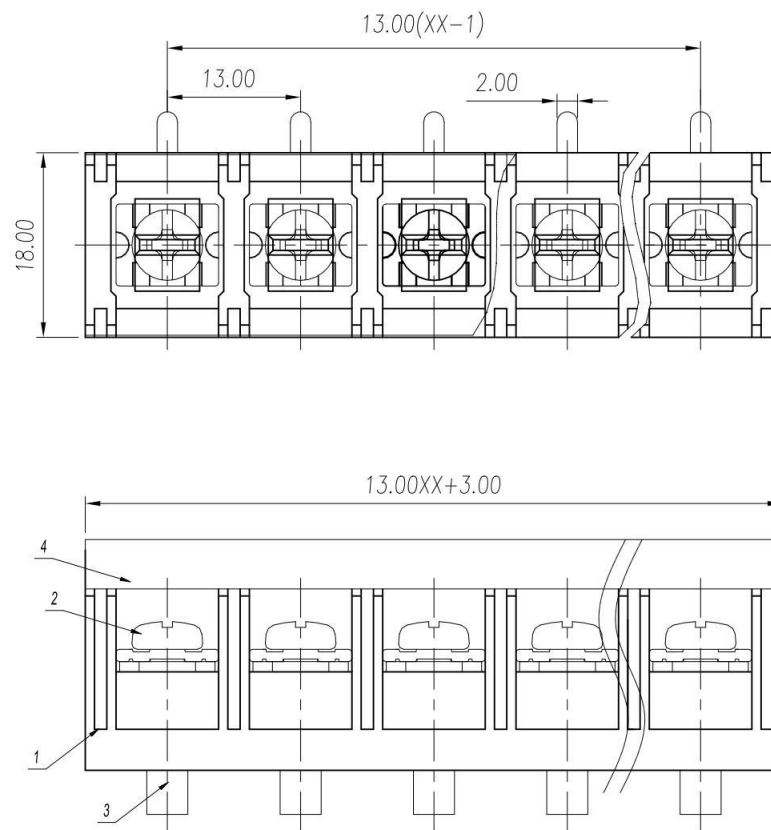

P.C.B. LAYOUT

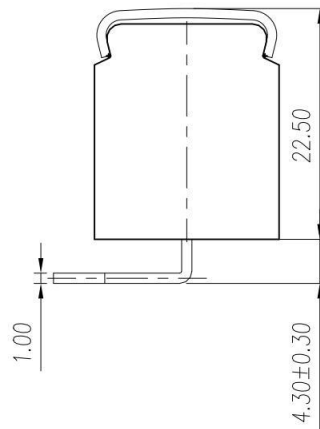

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		ZhaoXY	24.04.01

电 气 性 能 /Electrical	
额定电压 /Rated voltage	600V
额定电流 /Rated current	40A
接触电阻 /Contact resistance	20mΩ
绝缘电阻 /Insulation resistance	500MΩ/DC500V
使用线径 /Wire range	18~10AWG
耐 电 压 /With standing voltage	AC 2200V/1 Min
机 械 性 能 /Mechanica	
扭 矩 /Torque	1.2Nm(10.6Lb.in)
温度范围 /Temp.Range	-40°C~+105°C
瞬时温度 /MAX Soldering	+260°C, for 5 Sec
尺 寸 /Dimensions	
间 距 /Pitch	13mm
极 数 /Poles	2~20p

General Tolerances								—	∇	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 100	to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

Contact:sales@nbkafeng.com

4	Cover	PC	UL94V-2
3	Pin Header	Copper Alloy	Sn Plated
2	Screws	Steel	M4 Steel Ni plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	ZhaoXY	DATE	24.04.01	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	HuHT	DATE	24.04.01	SIZE	A4	TYPE: CUSTOMER DRAWING	
APP.	Jason	DATE	24.04.01	SCALE	2:1	DRAWING TYPE: SP-03	
宁波咖峰电子有限公司 NINGBO KAFENG ELECTRONIC CO.,LTD						PART NO.: KF78R-13.0-XXP	

FOR-0371 Rev.1.0