


- 1 MATERIAL: NYLON,VAMPAMID 66 0023 V0 H GW
VDE 40025912,GWFI 960,GWIT 775.
- 2 MAXIMUM OPERATING TEMPERATURE: 120℃
- 3 FOR SELF-TAB TERMINAL: 6.3X0.8 TL6300802
6.3X0.8 TL6300802-S
- 4 GLOW WIRE RESISTANT,GWT 750~850℃

REV.	DESCRIPTION	APPROVED	DATE
A	INITIAL RELEASE	L.H.L	2021/03/20
B	E0220512	L.H.L	2022/05/17

受控文件

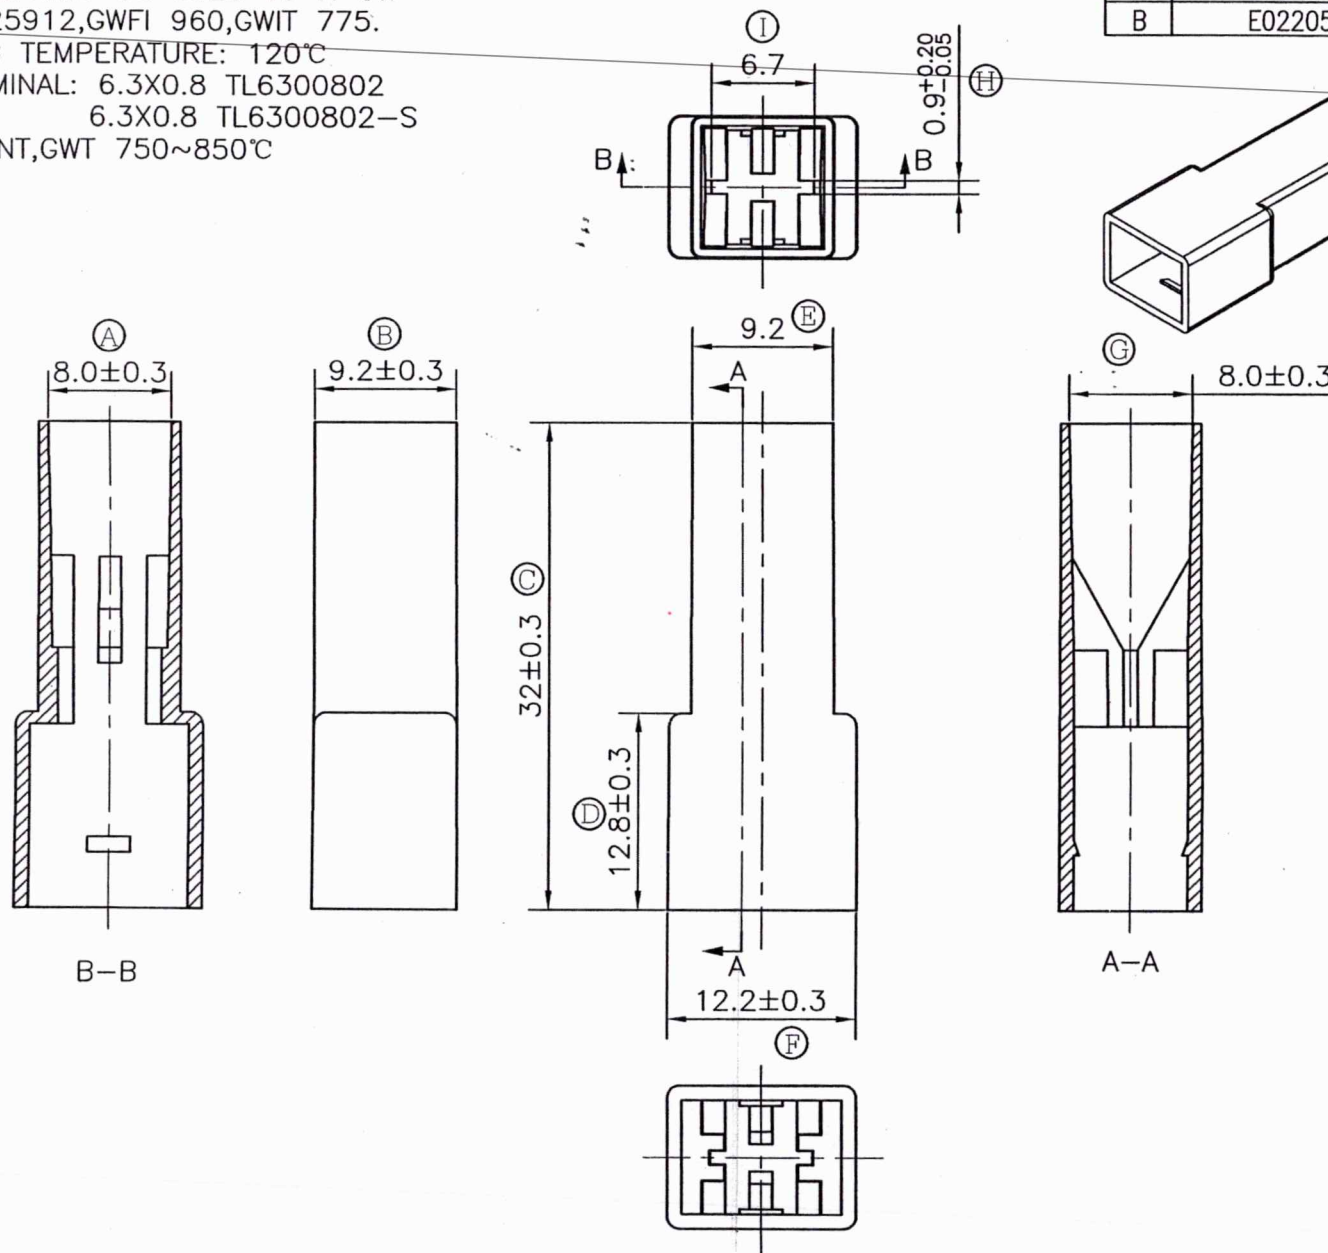

分发号: A0

CUSTOMER DRAWING

TITLE

HOUSING

MODEL NO.: H-TL630-01-V0

DWN: L.H.L 2022/05/17

DWG NO.: CD-H-TL630-002

REA: B

CHK: C.P.H 2022/05/17

GENERAL TOLERANCES (UNLESS SPECIFIED) .X ±0.3 .XX ±0.05 .XXX ±0.01 A° ±2°

UNIT: mm

SCALE: 2:1

APP: [Signature]

2022.5.17

PAM

力幹企業有限公司
POWER ACT ENTERPRISE LIMITED