
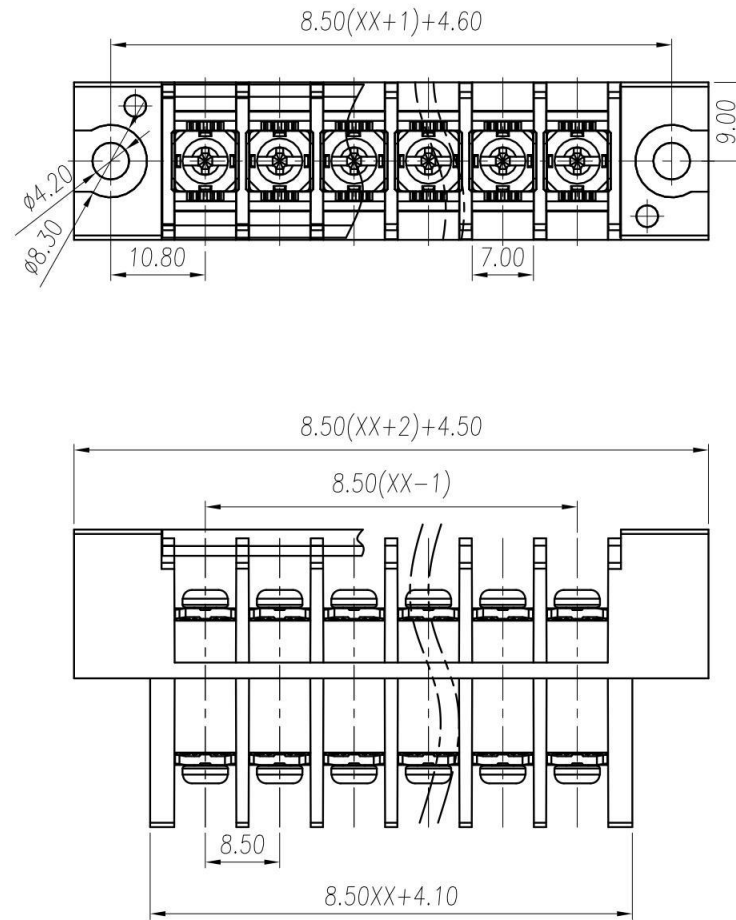
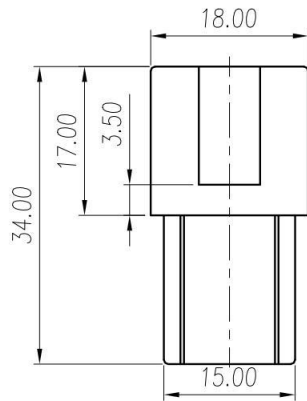


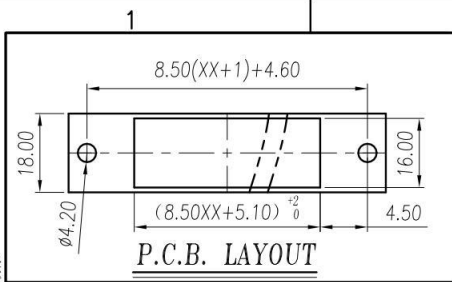

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		ZhaoXY	24.04.01

电 气 性 能 /Electrical	
额定电压 /Rated voltage	300V
额定电流 /Rated current	20A
接触电阻 /Contact resistance	20mΩ
绝缘电阻 /Insulation resistance	500MΩ/DC500V
使用线径 /Wire range	22~12AWG
耐 电 压 /With standing voltage	AC 1600V/1 Min
机 械 性 能 /Mechanica	
扭 矩 /Torque	1.2Nm(10.6Lb.in)
温度范围 /Temp.Range	-40°C~+130°C
瞬时温度 /MAX Soldering	+260°C, for 5 Sec
尺 寸 /Dimensions	
间 距 /Pitch	8.5mm
极 数 /Poles	02~15p

5	Cover	PC	UL94V-2
4	Nut	Steel	M3 Steel Zn plated
3	Current carrier	Copper Alloy	Sn Plated
2	Screws	Steel	M3 Steel Ni plated
1	Housing	PBT	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	ZhaoXY	DATE	24.04.01	UNITS	mm	THIRD ANGLE PROJECTION	☞
CHK.	HuHT	DATE	24.04.01	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	Jason	DATE	24.04.01	SCALE	2:1	DRAWING TYPE: SP-03	REV V1
宁波咖峰电子有限公司		KF17S-8.5-XXP					
NINGBO KAFENG ELECTRONIC CO.,LTD							

General Tolerances								—  		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

Contact:sales@nbkafeng.com