


HA 系列 / HA SERIES

小型标准连接器 / Compact Standard Connector





HA 系列 / HA SERIES

技术参数 Technical Characteristics

规范	Specifications	
规范	Specifications	DIN EN 60 664
		DIN EN 61 984
插芯	Inserts	
接插件针数	Number Of Contacts	3,4,10,16,32(2X16)+PE
HA-003/004		
额定电流	Rated Current	10A
相对地额定电压	Rated Voltage Conductor-ground	230V
相间额定电压	Rated Voltage Conductor-conductor	400V
额定脉冲电压	Rated Impulse Voltage	4kV
污染程度	Pollution Degree	3
或	Or	10A 250V 4kV 3
HA-010/016		
额定电流	Rated Current	16A
额定电压	Rated Voltage	250V
额定脉冲电压	Rated Impulse Voltage	4kV
污染程度	Pollution Degree	3
污染等级2时的参数	Pollution Degree 2 Also	16A 230/400V 4kV 2
依据UL/CSA额定电压	Rated Voltage Acc.to UI Csa	600V
绝缘电阻	Insulation Resistance	$\geq 10^{10}\Omega$
材料	Material	聚碳酸酯 Polycarbonate
工作温度范围	Limiting Temperatures	-40°C...+125°C
阻燃等级	Flammability Acc. To UI94	V0
可拔插次数	Mechanical Working Life-mating Cycles	≥ 500
插针	Contacts	
材料	Material	铜合金 Copper Alloy
表面处理	Surface	镀金 Hard-gold Plated 镀银 Hard-silver Plated
接触电阻	Contact Resistance	$\leq 1m\Omega$
螺钉连接	Screw Terminal	
导线规格	Wire Gauge	1.0-2.5mm ²
AWG	Awg	18-14
拧紧力矩	Tightening Torque	0.25Nm (HA-003/004) or 0.5Nm (HA-010/016)
冷压连接	Crimp Terminal	
-导线规格	Wire Gauge	0.14-4.0mm ²
-AWG	Awg	26-12
弹片连接	Cage-clamp	
导线规格	Wire Gauge	0.14-2.5mm ²
AWG	Awg	26-14




电流负载能力 Current Carrying Capacity

电流负载能力所受的限制主要来自包含接插针的接插体可承受的最大温度

The current carrying is limited by maximum temperature of materials for Inserts and contacts including terminals.

测试和控制过程依据 Measuring and testing techniques according to DIN EN 60512-5

①线径 Wire gauge: 2.5mm² ②线径 Wire gauge: 1.5mm² ③线径 Wire gauge: 1.0mm²

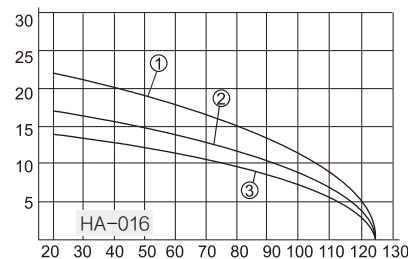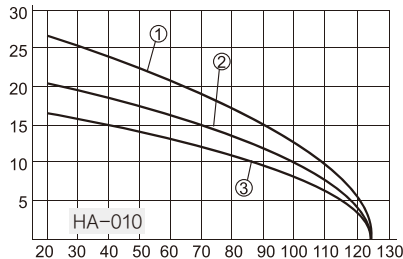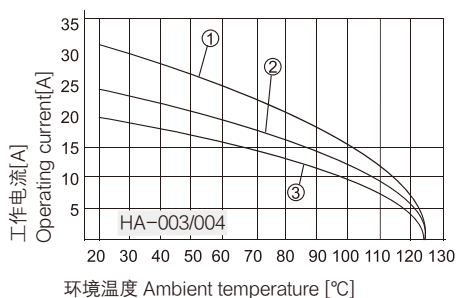

HA-003/004 小型插芯 The Slim Inserts 230/400V 10A 3/4+⊕

插芯 Inserts

外壳尺寸：匹配3A外壳，详情请参考11-05~11-11页

Hoods/Housings：Matching 3A Hood Housing，detail on P11-05~P11-11



螺丝连接 Screw terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HA-003-M	09200032611
母 Female	HA-003-F	09200032711



公 Male	HA-004-M	09200042611
母 Female	HA-004-F	09200042711





弹片连接 Cage-clamp




插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HA-003-MS	09200032633
母 Female	HA-003-FS	09200032733



公 Male	HA-004-MS	09200042633
母 Female	HA-004-FS	09200042733





HA-010 小型插芯 The Slim Inserts 230/400V 16A 10+⊕

插芯 Inserts

外壳尺寸：匹配10A外壳，详情请参考12-01~12-02页


Hoods/Housings：Matching 10A Hood Housing，detail on P12-01~P12-02

螺丝连接 Screw terminal




插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HA-010-M	09200102612
母 Female	HA-010-F	09200102812

1) 接插体之间的最大距离24mm
1) Distance for contact max.24mm

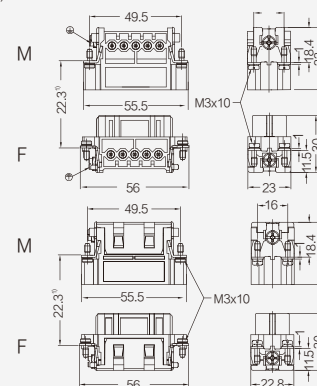


接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for Inserts for use without Hoods/housings



冷压连接 Crimp terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HA-010-MC	09200103001
母 Female	HA-010-FC	09200103101

附件 Accessories

16A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 1\text{m}\Omega$
镀银 Silver plated




镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CESM-0.37	09330006127	CESF-0.37	09330006227
CESM-0.5	09330006121	CESF-0.5	09330006220
CESM-0.75	09330006114	CESF-0.75	09330006214
CESM-1.0	09330006105	CESF-1.0	09330006205
CESM-1.5	09330006104	CESF-1.5	09330006204
CESM-2.5	09330006102	CESF-2.5	09330006202
CESM-3.0	09330006106	CESF-3.0	09330006206
CESM-4.0	09330006107	CESF-4.0	09330006207

公 Male	订货号 Part Number	母 Female	订货号 Part Number
CEGM-0.37	09330006117	CEGF-0.37	09330006217
CEGM-0.5	09330006122	CEGF-0.5	09330006222
CEGM-0.75	09330006115	CEGF-0.75	09330006215
CEGM-1.0	09330006118	CEGF-1.0	09330006218
CEGM-1.5	09330006116	CEGF-1.5	09330006216
CEGM-2.5	09330006123	CEGF-2.5	09330006223
CEGM-4.0	09330006119	CEGF-4.0	09330006221



M		F	
标示 Identification	线规 Wire gauge		剥线长度 Stripping length
no groove	0.14-0.37mm ²	AWG 26-22	7.5mm
no groove	0.5mm ²	AWG 20	7.5mm
1 groove	0.75mm ²	AWG 18	7.5mm
1 groove	1.1mm ²	AWG 18	7.5mm
2 groove	1.5mm ²	AWG 16	7.5mm
3 groove	2.5mm ²	AWG 14	7.5mm
wide groove	3mm ²	AWG 12	7.5mm
no groove	4mm ²	AWG 12	7.5mm

工具 Tools

冷压钳 Crimping tool




压接线经 Wire gauge	型号 Type	订货号 Part Number
0.5-4mm ²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
16A 冷压针 16A Crimp contacts	TL01	09990000059

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02



Поставка электромеханических - электронных компонентов, источников питания, вентиляторов, дисплеев, термоэлектрических модулей.

ООО «ЧЕРРИ КОМПАНИ»
ИНН/КПП: 9723252944/772301001

Тел: +74993978393; +79295688393

e-mail: info@cherrycomp.ru

www.cherrycomp.ru

109341, г. Москва, ул. Люблинская, д. 157, офис. 222

HA-016 小型插芯 The Slim Inserts 250V 16A 16+

插芯 Inserts

外壳尺寸：匹配16A外壳，详情请参考13-01~13-02页

Hoods/Housings：Matching 16A Hood Housing，detail on P13-01~P13-02

螺丝连接 Screw terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HA-016-M	09200162612
母 Female	HA-016-F	09200162812


冷压连接 Crimp terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HA-016-MC	09200163001
母 Female	HA-016-FC	09200163101


1) 接插体之间的最大距离24mm

1) Distance for contact max.24mm

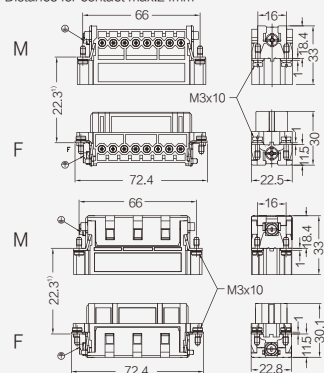


接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for Inserts for use without Hoods/housings



附件 Accessories

16A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 1\text{m}\Omega$
镀银 Silver plated




镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CESM-0.37	09330006127	CESF-0.37	09330006227
CESM-0.5	09330006121	CESF-0.5	09330006220
CESM-0.75	09330006114	CESF-0.75	09330006214
CESM-1.0	09330006105	CESF-1.0	09330006205
CESM-1.5	09330006104	CESF-1.5	09330006204
CESM-2.5	09330006102	CESF-2.5	09330006202
CESM-3.0	09330006106	CESF-3.0	09330006206
CESM-4.0	09330006107	CESF-4.0	09330006207

公 Male	订货号 Part Number	母 Female	订货号 Part Number
CEGM-0.37	09330006117	CEGF-0.37	09330006217
CEGM-0.5	09330006122	CEGF-0.5	09330006222
CEGM-0.75	09330006115	CEGF-0.75	09330006215
CEGM-1.0	09330006118	CEGF-1.0	09330006218
CEGM-1.5	09330006116	CEGF-1.5	09330006216
CEGM-2.5	09330006123	CEGF-2.5	09330006223
CEGM-4.0	09330006119	CEGF-4.0	09330006221



M		F	
标示 Identification	线规 Wire gauge	剥线长度 Stripping length	
no groove	014~0.37mm ²	AWG 26~22	7.5mm
no groove	0.5mm ²	AWG 20	7.5mm
1 groove	0.75mm ²	AWG 18	7.5mm
1 groove	1.0mm ²	AWG 18	7.5mm
2 groove	1.5mm ²	AWG 16	7.5mm
3 groove	2.5mm ²	AWG 14	7.5mm
wide groove	3mm ²	AWG 12	7.5mm
no groove	4mm ²	AWG 12	7.5mm

工具 Tools

冷压钳 Crimping tool



压接线经 Wire gauge	型号 Type	订货号 Part Number
0.5-4mm ²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
16A 冷压针 16A Crimp contacts	TL01	09990000059

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02



HA-032 小型插芯 The Slim Inserts 250V 16A 32+ ⊕

插芯 Inserts

外壳尺寸：匹配32A外壳，详情请参考14-01~14-02页

Hoods/Housings：Matching 32A Hood Housing，detail on P14-01~P14-02

螺丝连接 Screw terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HA-016-M(1-16)	09200162612
	HA-016-M(17-32)	09200162613
母 Female	HA-016-F(1-16)	09200162812
	HA-016-F(17-32)	09200162813


冷压连接 Crimp terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HA-016-MC(1-16)	09200163001
	HA-016-MC(17-32)	09200163011
母 Female	HA-016-FC(1-16)	09200163101
	HA-016-FC(17-32)	09200163111


1) 接插体之间的最大距离24mm

1) Distance for contact max.24mm

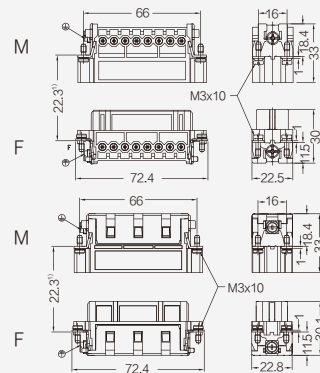


接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for Inserts for use without Hoods/Housings



附件 Accessories

16A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 1\text{m}\Omega$
镀银 Silver plated




镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CESM-0.37	09330006127	CESF-0.37	09330006227
CESM-0.5	09330006121	CESF-0.5	09330006220
CESM-0.75	09330006114	CESF-0.75	09330006214
CESM-1.0	09330006105	CESF-1.0	09330006205
CESM-1.5	09330006104	CESF-1.5	09330006204
CESM-2.5	09330006102	CESF-2.5	09330006202
CESM-3.0	09330006106	CESF-3.0	09330006206
CESM-4.0	09330006107	CESF-4.0	09330006207

公 Male	订货号 Part Number	母 Female	订货号 Part Number
CEGM-0.37	09330006117	CEGF-0.37	09330006217
CEGM-0.5	09330006122	CEGF-0.5	09330006222
CEGM-0.75	09330006115	CEGF-0.75	09330006215
CEGM-1.0	09330006118	CEGF-1.0	09330006218
CEGM-1.5	09330006116	CEGF-1.5	09330006216
CEGM-2.5	09330006123	CEGF-2.5	09330006223
CEGM-4.0	09330006119	CEGF-4.0	09330006221



M	F		
标示 Identification	线规 Wire gauge		剥线长度 Stripping length
no groove	014-0.37mm ²	AWG 26-22	7.5mm
no groove	0.5mm ²	AWG 20	7.5mm
1 groove	0.75mm ²	AWG 18	7.5mm
1 groove	1.0mm ²	AWG 18	7.5mm
2 groove	1.5mm ²	AWG 16	7.5mm
3 groove	2.5mm ²	AWG 14	7.5mm
wide groove	3mm ²	AWG 12	7.5mm
no groove	4mm ²	AWG 12	7.5mm

工具 Tools

冷压钳 Crimping tool



压接线经 Wire gauge	型号 Type	订货号 Part Number
0.5-4mm ²	TL02G	09990000021

退针器 Removal tool





适用类型 For	型号 Type	订货号 Part Number
16A 冷压针 16A Crimp contacts	TL01	09990000059

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02

HE 系列 / HE SERIES

最常规的标准连接器 / Standard Connector

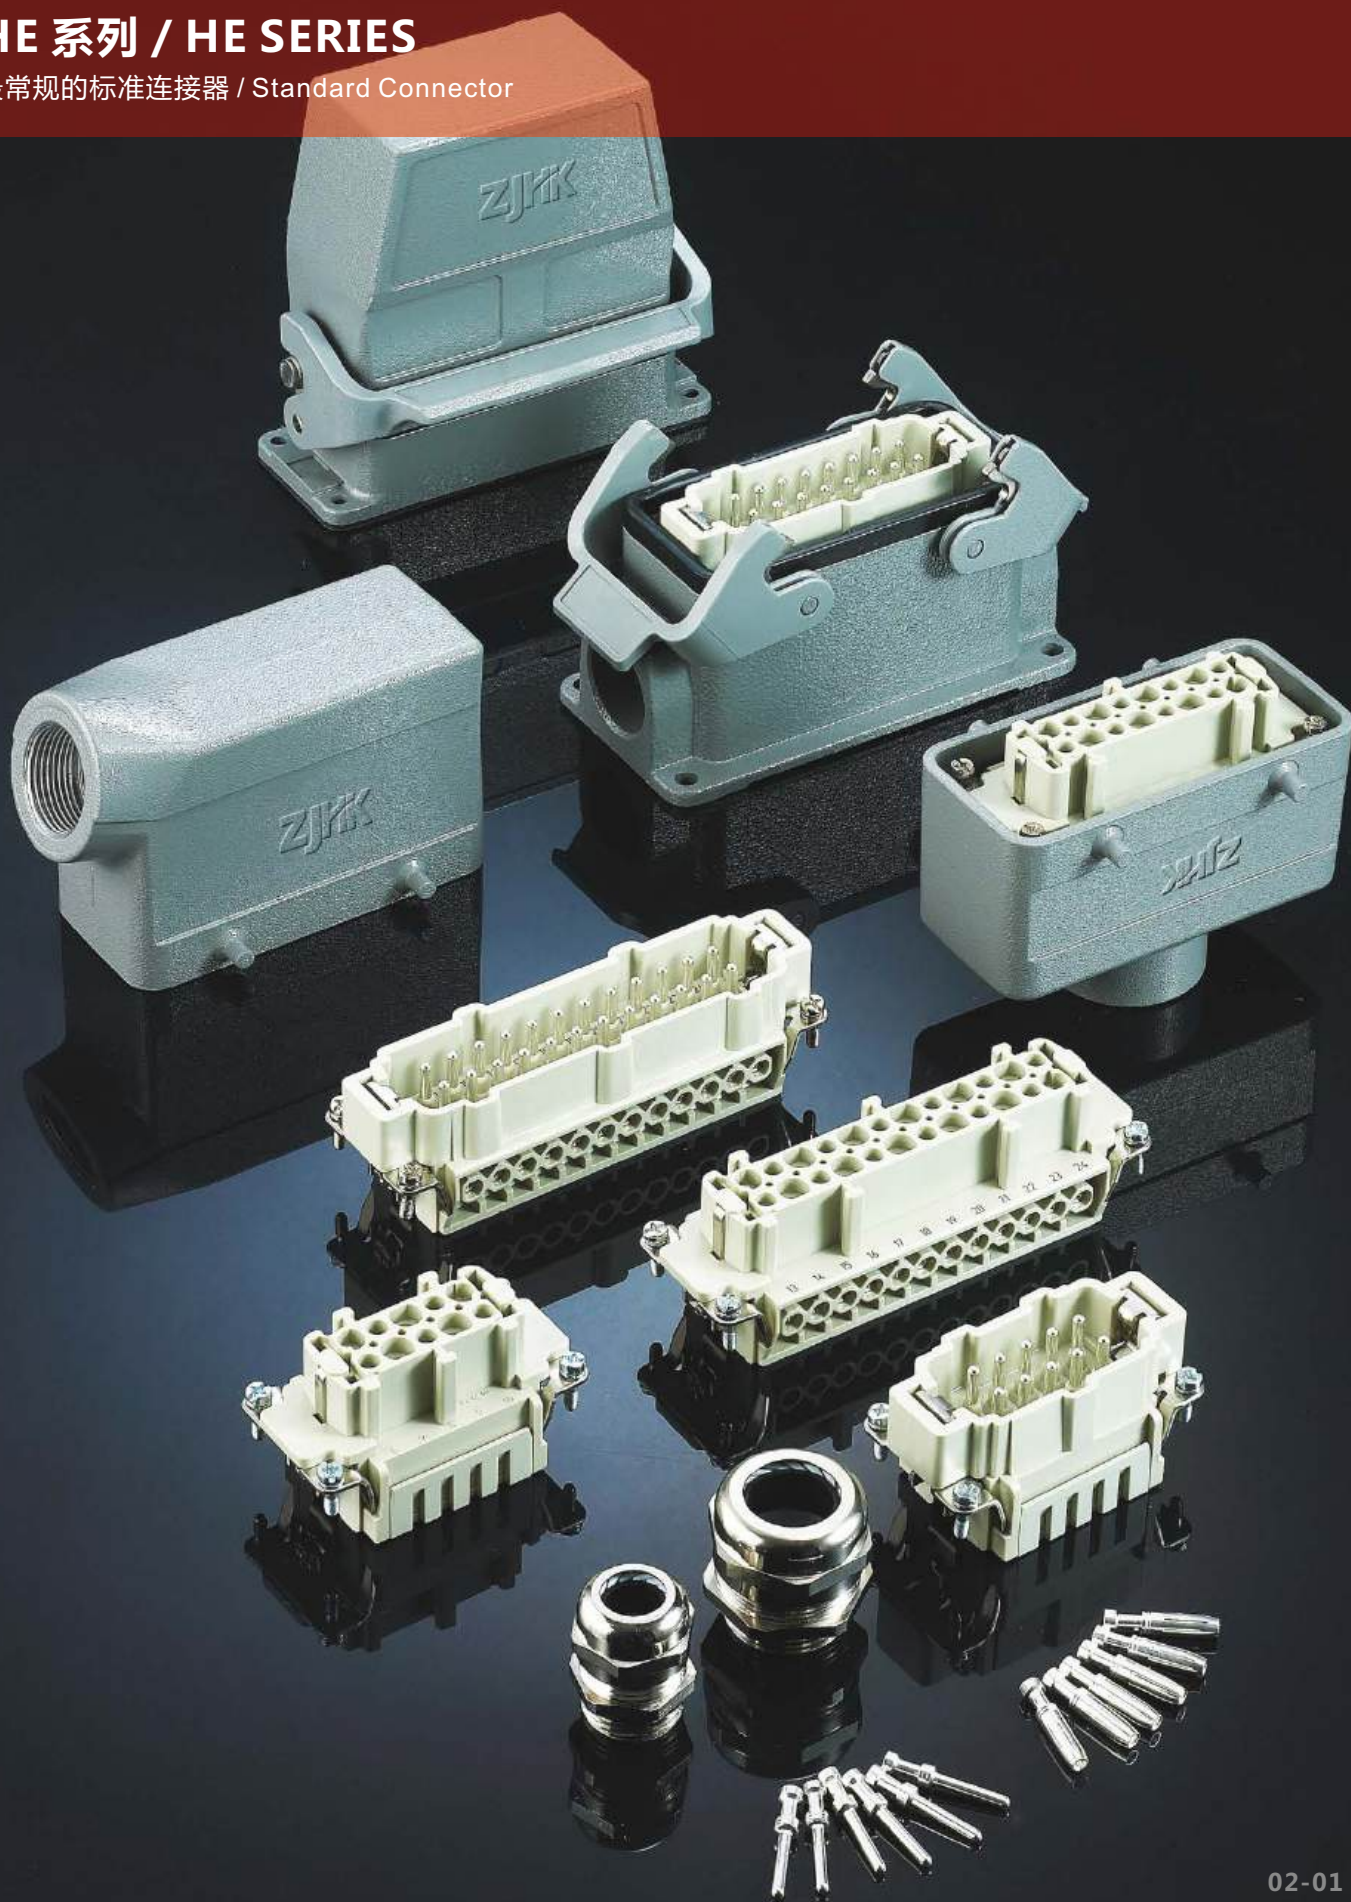



HE 系列 / HE SERIES

技术参数 Technical Characteristics


规范	Specifications	
规范	Specifications	DIN EN 60 664
		DIN EN 61 984
插芯	Inserts	
依据 EN 61 984的额定电压	Electrical data acc. to EN 61 984	
接插件针数	Number Of Contacts	6,10,16,24,32(2X16),48(2X24)+PE
-额定电流	Rated Current	16A
-额定电压	Rated Voltage	500V
-额定脉冲电压	Rated Impulse Voltage	6kV
-污染程度	Pollution Degree	3
-污染等级2时的参数	Pollution Degree 2 Also	16A 400/690V 6kV 2
依据UL/CSA额定电压	Rated Voltage Acc. To UI CSA	600V
绝缘电阻	Insulation Resistance	$\geq 10^{10} \Omega$
材料	Material	聚碳酸酯 Polycarbonate
工作温度范围	Limiting Temperatures	-40°C...+125°C
依据UL94阻燃等级	Flammability Acc. To UL94	V0
可拔插次数	Mechanical Working Life-mating Cycles	≥ 500
插针	Contacts	
材料	Material	铜合金 Copper Alloy
表面处理	Surface	镀金 Hard-gold Plated
		镀银 Hard-silver Plated
接触电阻	Contact Resistance	$\leq 1 \text{ m}\Omega$
螺钉连接	Screw Terminal	
-导线规格	-Wire Gauge	0.14-2.5mm ²
-AWG	-AWG	26-14
-拧紧力矩	-Tightening Torque	0.5Nm
-剥线长度	-Stripping length	7.0mm
冷压连接	Crimp Terminal	
-导线规格	Wire Gauge	0.14-4.0mm ²
-AWG	-AWG	26-12
-剥线长度	-Stripping length	7.5mm
弹片连接	Cage-clamp	
-导线规格	Wire Gauge	0.14-2.5mm ²
-AWG	-AWG	26-14
-剥线长度	-Stripping length	7-9mm

电流负载能力 Current Carrying Capacity



电流负载能力所受的限制主要来自包含接插针的接插体可承受的最大温度

The current carrying is limited by maximum temperature of materials for inserts and contacts including terminals.

测试和控制过程依据 Measuring and testing techniques according to DIN EN 60512-5



环境温度 Ambient temperature [°C]





Поставка электромеханических - электронных компонентов, источников питания, вентиляторов, дисплеев, термоэлектрических модулей.

ООО «ЧЕРРИ КОМПАНИ»
ИНН/КПП: 9723252944/772301001

Тел: +74993978393; +79295688393

e-mail: info@cherrycomp.ru

www.cherrycomp.ru

109341, г. Москва, ул. Люблинская, д. 157, офис. 222

HE-006 常规型插芯 Standard Inserts 500V 16A 6+

插芯 Inserts

外壳尺寸：匹配6B外壳，详情请参考15-01~15-10页

Hoods/Housings：Matching 6B Hood Housing，detail on P15-01~P15-10

螺丝连接 Screw terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HE-006-M	09330062601
母 Female	HE-006-F	09330062701

冷压连接 Crimp terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HE-006-MC	09330062602
母 Female	HE-006-FC	09330062702


弹片连接 Cage-clamp



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HE-006-MS	09330062616
母 Female	HE-006-FS	09330062716

1) 接插体之间的最大距离21mm


1) Distance for contact max.21mm

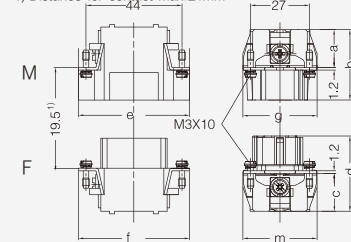

	a	b	c	d	e	f	g	h	i	j	k	l	m	n	o	p	q	r	s	t	u	v	w	x	y	z
M/F	16	32.4	51	34	16.8	34.8	51	34	18	35	51	34	18	35	51	34	18	35	51	34	18	35	51	34	18	35
MC/FC	18	33.5	51	34	18	35	51	34	18	35	51	34	18	35	51	34	18	35	51	34	18	35	51	34	18	35
MS/FS	18	33.5	51	34	18.2	35.4	51	34	18.2	35.4	51	34	18.2	35.4	51	34	18.2	35.4	51	34	18.2	35.4	51	34	18.2	35.4
MSS/FSS	34.5	49.5	50	34	33.4	50	50	34	33.4	50	50	34	33.4	50	50	34	33.4	50	50	34	33.4	50	50	34	33.4	50
MZ/FZ	17.4	34.5	51	33.8	17.2	36.7	51	34	17.2	36.7	51	34	17.2	36.7	51	34	17.2	36.7	51	34	17.2	36.7	51	34	17.2	36.7


接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for inserts for use without Hoods/housings



NEW

直插式弹片连接 Quick lock terminal



公 Male	HE-006-MZ	09330062801
母 Female	HE-006-FZ	09330062901

关于直插式弹片连接的优势，详见P00-14

双弹片连接(一针双接线) Cage-clamp terminal (two terminal per contact)



公 Male	HE-006-MSS	09330062672
母 Female	HE-006-FSS	09330062772

附件 Accessories

16A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 1\text{m}\Omega$
镀银 Silver plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CESM-0.37	09330006127	CESF-0.37	09330006227
CESM-0.5	09330006121	CESF-0.5	09330006220
CESM-0.75	09330006114	CESF-0.75	09330006214
CESM-1.0	09330006105	CESF-1.0	09330006205
CESM-1.5	09330006104	CESF-1.5	09330006204
CESM-2.5	09330006102	CESF-2.5	09330006202
CESM-3.0	09330006106	CESF-3.0	09330006206
CESM-4.0	09330006107	CESF-4.0	09330006207

镀金 Gold plated



CEGM-0.37	09330006117	CEGF-0.37	09330006217
CEGM-0.5	09330006122	CEGF-0.5	09330006222
CEGM-0.75	09330006115	CEGF-0.75	09330006215
CEGM-1.0	09330006118	CEGF-1.0	09330006218
CEGM-1.5	09330006116	CEGF-1.5	09330006216
CEGM-2.5	09330006123	CEGF-2.5	09330006223
CEGM-4.0	09330006119	CEGF-4.0	09330006221

工具 Tools

冷压钳 Crimping tool




压接线径 Wire gauge	型号 Type	订货号 Part Number
0.5-4mm ²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
16A 冷压针 16A Crimp contacts	TL01	09990000059

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02



标示 Identification	线规 Wire gauge	剥线长度 Stripping length
no groove	0.14-0.37mm ² AWG 26-22	7.5mm
no groove	0.5mm ² AWG 20	7.5mm
1 groove	0.75mm ² AWG 18	7.5mm
1 groove	1.0mm ² AWG 18	7.5mm
2 groove	1.5mm ² AWG 16	7.5mm
3 groove	2.5mm ² AWG 14	7.5mm
wide groove	3mm ² AWG 12	7.5mm
no groove	4mm ² AWG 12	7.5mm



HE-010 常规型插芯 Standard Inserts 500V 16A 10+

插芯 Inserts

外壳尺寸：匹配10B外壳，详情请参考16-01~16-13页

Hoods/Housings：Matching 10B Hood Housing，detail on P16-01~P16-13

螺丝连接 Screw terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HE-010-M	09330102601
母 Female	HE-010-F	09330102701

冷压连接 Crimp terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HE-010-MC	09330102602
母 Female	HE-010-FC	09330102702

弹片连接 Cage-clamp



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HE-010-MS	09330102616
母 Female	HE-010-FS	09330102716

NEW



直插式弹片连接 Quick lock terminal

公 Male	HE-010-MZ	09330102801
母 Female	HE-010-FZ	09330102901

关于直插式弹片连接的优势，详见P00-14




双弹片连接（一针双接线）Cage-clamp terminal (two terminal per contact)

公 Male	HE-010-MSS	09330102672
母 Female	HE-010-FSS	09330102772

1) 接插体之间的最大距离21mm


1) Distance for contact max.21mm

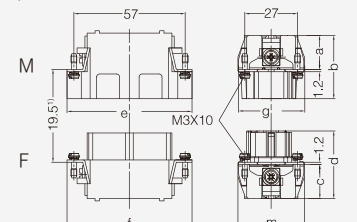

	a	b	e	g	c	d	f	m
M/F	16.5	32.5	64.5	34	16.8	34.8	64.5	34
MC/FC	18	33.5	64	34	17.5	35.2	64.5	34
MS/FS	18.5	33.5	64	34	18.5	35.6	64.5	34
MSS/FSS	34	49	64	34	33.5	49.5	63	34
MZ/FZ	17.4	34.5	64	33.8	17.2	36.8	64.5	34


接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for inserts for use without Hoods/housings



附件 Accessories

16A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 1\text{m}\Omega$
镀银 Silver plated




公 Male	订货号 Part Number	母 Female	订货号 Part Number
CESM-0.37	09330006127	CESF-0.37	09330006227
CESM-0.5	09330006121	CESF-0.5	09330006220
CESM-0.75	09330006114	CESF-0.75	09330006214
CESM-1.0	09330006105	CESF-1.0	09330006205
CESM-1.5	09330006104	CESF-1.5	09330006204
CESM-2.5	09330006102	CESF-2.5	09330006202
CESM-3.0	09330006106	CESF-3.0	09330006206
CESM-4.0	09330006107	CESF-4.0	09330006207

镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CEGM-0.37	09330006117	CEGF-0.37	09330006217
CEGM-0.5	09330006122	CEGF-0.5	09330006222
CEGM-0.75	09330006115	CEGF-0.75	09330006215
CEGM-1.0	09330006118	CEGF-1.0	09330006218
CEGM-1.5	09330006116	CEGF-1.5	09330006216
CEGM-2.5	09330006123	CEGF-2.5	09330006223
CEGM-4.0	09330006119	CEGF-4.0	09330006221



标示 Identification	线规 Wire gauge	剥线长度 Stripping length
no groove	014-0.37mm ² AWG 26-22	7.5mm
no groove	0.5mm ² AWG 20	7.5mm
1 groove	0.75mm ² AWG 18	7.5mm
1 groove	1.1mm ² AWG 18	7.5mm
2 groove	1.5mm ² AWG 16	7.5mm
3 groove	2.5mm ² AWG 14	7.5mm
wide groove	3mm ² AWG 12	7.5mm
no groove	4mm ² AWG 12	7.5mm

工具 Tools

冷压钳 Crimping tool



压接线经 Wire gauge	型号 Type	订货号 Part Number
0.5-4mm ²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
16A 冷压针 16A Crimp contacts	TL01	09990000059

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02



HE-016 常规型插芯 Standard Inserts 500V 16A 16+

插芯 Inserts

外壳尺寸：匹配16B外壳，详情请参考17-01~17-21页

Hoods/Housings：Matching 16B Hood Housing，detail on P17-01~P17-21页

螺丝连接 Screw terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HE-016-M	09330162601
母 Female	HE-016-F	09330162701

冷压连接 Crimp terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HE-016-MC	09330162602
母 Female	HE-016-FC	09330162702


弹片连接 Cage-clamp



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HE-016-MS	09330162616
母 Female	HE-016-FS	09330162716

1) 接插体之间的最大距离21mm


1) Distance for contact max.21mm

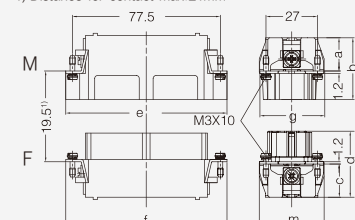

	a	b	e	g	c	d	f	m
M/F	17	32.5	84.2	34	17	34.8	84.5	34
MC/FC	18	33.5	84.5	34	18	35	84.5	34
MS/FS	18	33.7	84.5	34	18.2	35.5	84.5	34
MSS/FSS	34.3	49	84.5	34	32.2	49	84.5	34
MZ/FZ	17.4	34.5	84.5	34	17.2	36.8	84.5	34


接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for inserts for use without Hoods/housings



NEW

直插式弹片连接 Quick lock terminal

公 Male	HE-016-MZ	09330162801
母 Female	HE-016-FZ	09330162901

关于直插式弹片连接的优势，详见P00-14

双弹片连接(一针双接线) Cage-clamp terminal (two terminal per contact)

公 Male	HE-016-MSS	09330162672
母 Female	HE-016-FSS	09330162772

附件 Accessories

16A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 1\text{m}\Omega$
镀银 Silver plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CESM-0.37	09330006127	CESF-0.37	09330006227
CESM-0.5	09330006121	CESF-0.5	09330006220
CESM-0.75	09330006114	CESF-0.75	09330006214
CESM-1.0	09330006105	CESF-1.0	09330006205
CESM-1.5	09330006104	CESF-1.5	09330006204
CESM-2.5	09330006102	CESF-2.5	09330006202
CESM-3.0	09330006106	CESF-3.0	09330006206
CESM-4.0	09330006107	CESF-4.0	09330006207

镀金 Gold plated



CEGM-0.37	09330006117	CEGF-0.37	09330006217
CEGM-0.5	09330006122	CEGF-0.5	09330006222
CEGM-0.75	09330006115	CEGF-0.75	09330006215
CEGM-1.0	09330006118	CEGF-1.0	09330006218
CEGM-1.5	09330006116	CEGF-1.5	09330006216
CEGM-2.5	09330006123	CEGF-2.5	09330006223
CEGM-4.0	09330006119	CEGF-4.0	09330006221

工具 Tools

冷压钳 Crimping tool




压接线径 Wire gauge	型号 Type	订货号 Part Number
0.5-4mm ²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
16A 冷压针 16A Crimp contacts	TL01	09990000059

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02



标示 Identification	线规 Wire gauge	剥线长度 Stripping length
no groove	0.14-0.37mm ² AWG 26-22	7.5mm
no groove	0.5mm ² AWG 20	7.5mm
1 groove	0.75mm ² AWG 18	7.5mm
1 groove	1mm ² AWG 18	7.5mm
2 groove	1.5mm ² AWG 16	7.5mm
3 groove	2.5mm ² AWG 14	7.5mm
wide groove	3mm ² AWG 12	7.5mm
no groove	4mm ² AWG 12	7.5mm



HE-024 常规型插芯 Standard Inserts 500V 16A 24+

插芯 Inserts

外壳尺寸：匹配24B外壳，详情请参考18-01~18-22页

Hoods/Housings：Matching 24B Hood Housing，detail on P18-01~P18-22

螺丝连接 Screw terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HE-024-M	09330242601
母 Female	HE-024-F	09330242701

冷压连接 Crimp terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HE-024-MC	09330242602
母 Female	HE-024-FC	09330242702

弹片连接 Cage-clamp



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HE-024-MS	09330242616
母 Female	HE-024-FS	09330242716

NEW



直插式弹片连接 Quick lock terminal

公 Male	HE-024-MZ	09330242801
母 Female	HE-024-FZ	09330242901

关于直插式弹片连接的优势，详见P00-14




双弹片连接(一针双接线) Cage-clamp terminal (two terminal per contact)

公 Male	HE-024-MSS	09330242672
母 Female	HE-024-FSS	09330242772

1) 接插体之间的最大距离21mm


1) Distance for contact max.21mm

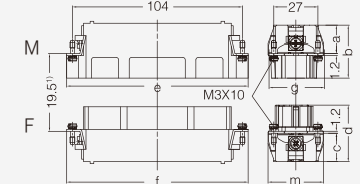

	a	b	e	g	c	d	f	m
M/F	17	32.5	111	34	17	34.8	111.5	34
MC/FC	18.3	33.5	111	34	18.3	36	111.5	34
MS/FS	18.5	33.6	111	34	18.5	36	111.5	34
MSS/FSS	34	49	110	34	32	49	110	34
MZ/FZ	17.4	34.5	111	34	17.2	36.7	111.5	34


接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for inserts for use without Hoods/housings



附件 Accessories

16A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 1\text{m}\Omega$
镀银 Silver plated




公 Male	订货号 Part Number	母 Female	订货号 Part Number
CESM-0.37	09330006127	CESF-0.37	09330006227
CESM-0.5	09330006121	CESF-0.5	09330006220
CESM-0.75	09330006114	CESF-0.75	09330006214
CESM-1.0	09330006105	CESF-1.0	09330006205
CESM-1.5	09330006104	CESF-1.5	09330006204
CESM-2.5	09330006102	CESF-2.5	09330006202
CESM-3.0	09330006106	CESF-3.0	09330006206
CESM-4.0	09330006107	CESF-4.0	09330006207

镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CEGM-0.37	09330006117	CEGF-0.37	09330006217
CEGM-0.5	09330006122	CEGF-0.5	09330006222
CEGM-0.75	09330006115	CEGF-0.75	09330006215
CEGM-1.0	09330006118	CEGF-1.0	09330006218
CEGM-1.5	09330006116	CEGF-1.5	09330006216
CEGM-2.5	09330006123	CEGF-2.5	09330006223
CEGM-4.0	09330006119	CEGF-4.0	09330006221



标示 Identification	线规 Wire gauge	剥线长度 Stripping length
no groove	0.14-0.37mm ² AWG 26-22	7.5mm
no groove	0.5mm ² AWG 20	7.5mm
1 groove	0.75mm ² AWG 18	7.5mm
1 groove	1.0mm ² AWG 18	7.5mm
2 groove	1.5mm ² AWG 16	7.5mm
3 groove	2.5mm ² AWG 14	7.5mm
wide groove	3mm ² AWG 12	7.5mm
no groove	4mm ² AWG 12	7.5mm

工具 Tools

冷压钳 Crimping tool



压接线径 Wire gauge	型号 Type	订货号 Part Number
0.5-4mm ²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
16A 冷压针 16A Crimp contacts	TL01	09990000059

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02



Поставка электромеханических - электронных компонентов, источников питания, вентиляторов, дисплеев, термозлектрических модулей.

ООО «ЧЕРРИ КОМПАНИ»

ИНН/КПП: 9723252944/772301001

Тел: +74993978393; +79295688393

e-mail: info@cherrycomp.ru

www.cherrycomp.ru

109341, г. Москва, ул. Люблинская, д. 157, офис. 222

HE-032 常规型插芯 Standard Inserts 500V 16A 32+

插芯 Inserts

外壳尺寸：匹配32B外壳，详情请参考19-01~19-04页

Hoods/Housings : Matching 32B Hood Housing , detail on P19-01~P19-04

螺丝连接 Screw terminal

插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HE-016-M(1-16)	09330162601
	HE-016-M(17-32)	09330162611
母 Female	HE-016-F(1-16)	09330162701
	HE-016-F(17-32)	09330162711

冷压连接 Crimp terminal

插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HE-016-MC(1-16)	09330162602
	HE-016-MC(17-32)	09330162612
母 Female	HE-016-FC(1-16)	09330162702
	HE-016-FC(17-32)	09330162712

弹片连接 Cage-clamp

插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HE-016-MS(1-16)	09330162616
	HE-016-MS(17-32)	09330162626
母 Female	HE-016-FS(1-16)	09330162716
	HE-016-FS(17-32)	09330162726

直插式弹片连接 Quick lock terminal


公 Male	HE-016-MZ(1-16)	09330162801
	HE-016-MZ(17-32)	09330162811
母 Female	HE-016-FZ(1-16)	09330162901
	HE-016-FZ(17-32)	09330162911

双弹片连接(一针双接线) Cage-clamp terminal (two terminal per contact)

公 Male	HE-016-MSS(1-16)	09330162672
	HE-016-MSS(17-32)	09330162672
母 Female	HE-016-FSS(1-16)	09330162772
	HE-016-FSS(17-32)	09330162772


1) 接插体之间的最大距离21mm

1) Distance for contact max.21mm




接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for inserts for use without Hoods/housings



附件 Accessories

16A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 1\text{m}\Omega$
镀银 Silver pl



镀金 Gold pla



工具 Tools

冷压钳 Crimpin



退针器 Removal tool




公 Male	订货号 Part Number	母 Female	订货号 Part Number
CESM-0.37	09330006127	CESF-0.37	09330006227
CESM-0.5	09330006121	CESF-0.5	09330006220
CESM-0.75	09330006114	CESF-0.75	09330006214
CESM-1.0	09330006105	CESF-1.0	09330006205
CESM-1.5	09330006104	CESF-1.5	09330006204
CESM-2.5	09330006102	CESF-2.5	09330006202
CESM-3.0	09330006106	CESF-3.0	09330006206
CESM-4.0	09330006107	CESF-4.0	09330006207

公 Male	订货号 Part Number	母 Female	订货号 Part Number
CEGM-0.37	09330006117	CEGF-0.37	09330006217
CEGM-0.5	09330006122	CEGF-0.5	09330006222
CEGM-0.75	09330006115	CEGF-0.75	09330006215
CEGM-1.0	09330006118	CEGF-1.0	09330006218
CEGM-1.5	09330006116	CEGF-1.5	09330006216
CEGM-2.5	09330006123	CEGF-2.5	09330006223
CEGM-4.0	09330006119	CEGF-4.0	09330006221

压接线径 Wire gauge	型号 Type	订货号 Part Number
0.5-4mm ²	TL02G	09990000021

适用类型 For	型号 Type	订货号 Part Number
16A 冷压针 16A Crimp contacts	TL01	09990000059

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02



标示 Identification	线规 Wire gauge	剥线长度 Stripping length
no groove	0.14-0.37mm ² AWG 26-22	7.5mm
no groove	0.5mm ² AWG 20	7.5mm
1 groove	0.75mm ² AWG 18	7.5mm
1 groove	1.0mm ² AWG 18	7.5mm
2 groove	1.5mm ² AWG 16	7.5mm
3 groove	2.5mm ² AWG 14	7.5mm
wide groove	3mm ² AWG 12	7.5mm
no groove	4mm ² AWG 12	7.5mm



HE-048 常规型插芯 Standard Inserts 500V 16A 48+

插芯 Inserts

外壳尺寸：匹配48B外壳，详情请参考20-01~20-02页

Hoods/Housings：Matching 48B Hood Housing，detail on P20-01~P20-02

螺丝连接 Screw terminal

	插芯 Inserts	型号 Type	订货号 Part Number
	公 Male	HE-024-M(1-24)	09330242601
	母 Female	HE-024-M(25-48)	09330242611
		HE-024-F(1-24)	09330242701
		HE-024-F(25-48)	09330242711

冷压连接 Crimp terminal

	插芯 Inserts	型号 Type	订货号 Part Number
	公 Male	HE-024-MC(1-24)	09330242602
	母 Female	HE-024-MC(25-48)	09330242612
		HE-024-FC(1-24)	09330242702
		HE-024-FC(25-48)	09330242712

弹片连接 Cage-clamp

	插芯 Inserts	型号 Type	订货号 Part Number
	公 Male	HE-024-MS(1-24)	09330242616
	母 Female	HE-024-MS(25-48)	09330242626
		HE-024-FS(1-24)	09330242716
		HE-024-FS(25-48)	09330242726

NEW


	直插式弹片连接 Quick lock terminal		
	公 Male	HE-024-MZ(1-24)	09330242801
	母 Female	HE-024-MZ(25-48)	09330242811
		HE-024-FZ(1-24)	09330242901
		HE-024-FZ(25-48)	09330242911

关于直插式弹片连接的优势，详见P00-14

	双弹片连接(一针双接线) Cage-clamp terminal (two terminal per contact)		
	公 Male	HE-024-MSS(1-24)	09330242672
	母 Female	HE-024-MSS(25-48)	09330242672
		HE-024-FSS(1-24)	09330242772
		HE-024-FSS(25-48)	09330242772

1) 接插体之间的最大距离21mm


1) Distance for contact max.21mm



	a	b	e	g	c	d	f	m
M/F	17	32.5	111	34	17	34.8	111.5	34
MC/FC	18.3	33.5	111	34	18.3	36	111.5	34
MS/FS	18.5	33.6	111	34	18.5	36	111.5	34
MSS/FSS	34	49	110	34	32	49	110	34
MZ/FZ	17.4	34.5	111	34	17.2	36.7	111.5	34


接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for inserts for use without Hoods/housings



附件 Accessories

16A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 1\text{m}\Omega$
镀银 Silver plated




镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CESM-0.37	09330006127	CESF-0.37	09330006227
CESM-0.5	09330006121	CESF-0.5	09330006220
CESM-0.75	09330006114	CESF-0.75	09330006214
CESM-1.0	09330006105	CESF-1.0	09330006205
CESM-1.5	09330006104	CESF-1.5	09330006204
CESM-2.5	09330006102	CESF-2.5	09330006202
CESM-3.0	09330006106	CESF-3.0	09330006206
CESM-4.0	09330006107	CESF-4.0	09330006207

公 Male	订货号 Part Number	母 Female	订货号 Part Number
CEGM-0.37	09330006117	CEGF-0.37	09330006217
CEGM-0.5	09330006122	CEGF-0.5	09330006222
CEGM-0.75	09330006115	CEGF-0.75	09330006215
CEGM-1.0	09330006118	CEGF-1.0	09330006218
CEGM-1.5	09330006116	CEGF-1.5	09330006216
CEGM-2.5	09330006123	CEGF-2.5	09330006223
CEGM-4.0	09330006119	CEGF-4.0	09330006221



标示 Identification	线规 Wire gauge	剥线长度 Stripping length
no groove	0.14-0.37mm ² AWG 26-22	7.5mm
no groove	0.5mm ² AWG 20	7.5mm
1 groove	0.75mm ² AWG 18	7.5mm
1 groove	1.1mm ² AWG 18	7.5mm
2 groove	1.5mm ² AWG 16	7.5mm
3 groove	2.5mm ² AWG 14	7.5mm
wide groove	3mm ² AWG 12	7.5mm
no groove	4mm ² AWG 12	7.5mm

工具 Tools

冷压钳 Crimping tool



压接线经 Wire gauge	型号 Type	订货号 Part Number
0.5-4mm ²	TL02G	09990000021

退针器 Removal tool




适用类型 For	型号 Type	订货号 Part Number
16A 冷压针 16A Crimp contacts	TL01	09990000059

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02

HEE 系列 / HEE SERIES

高密度型连接器 / High-density Connector

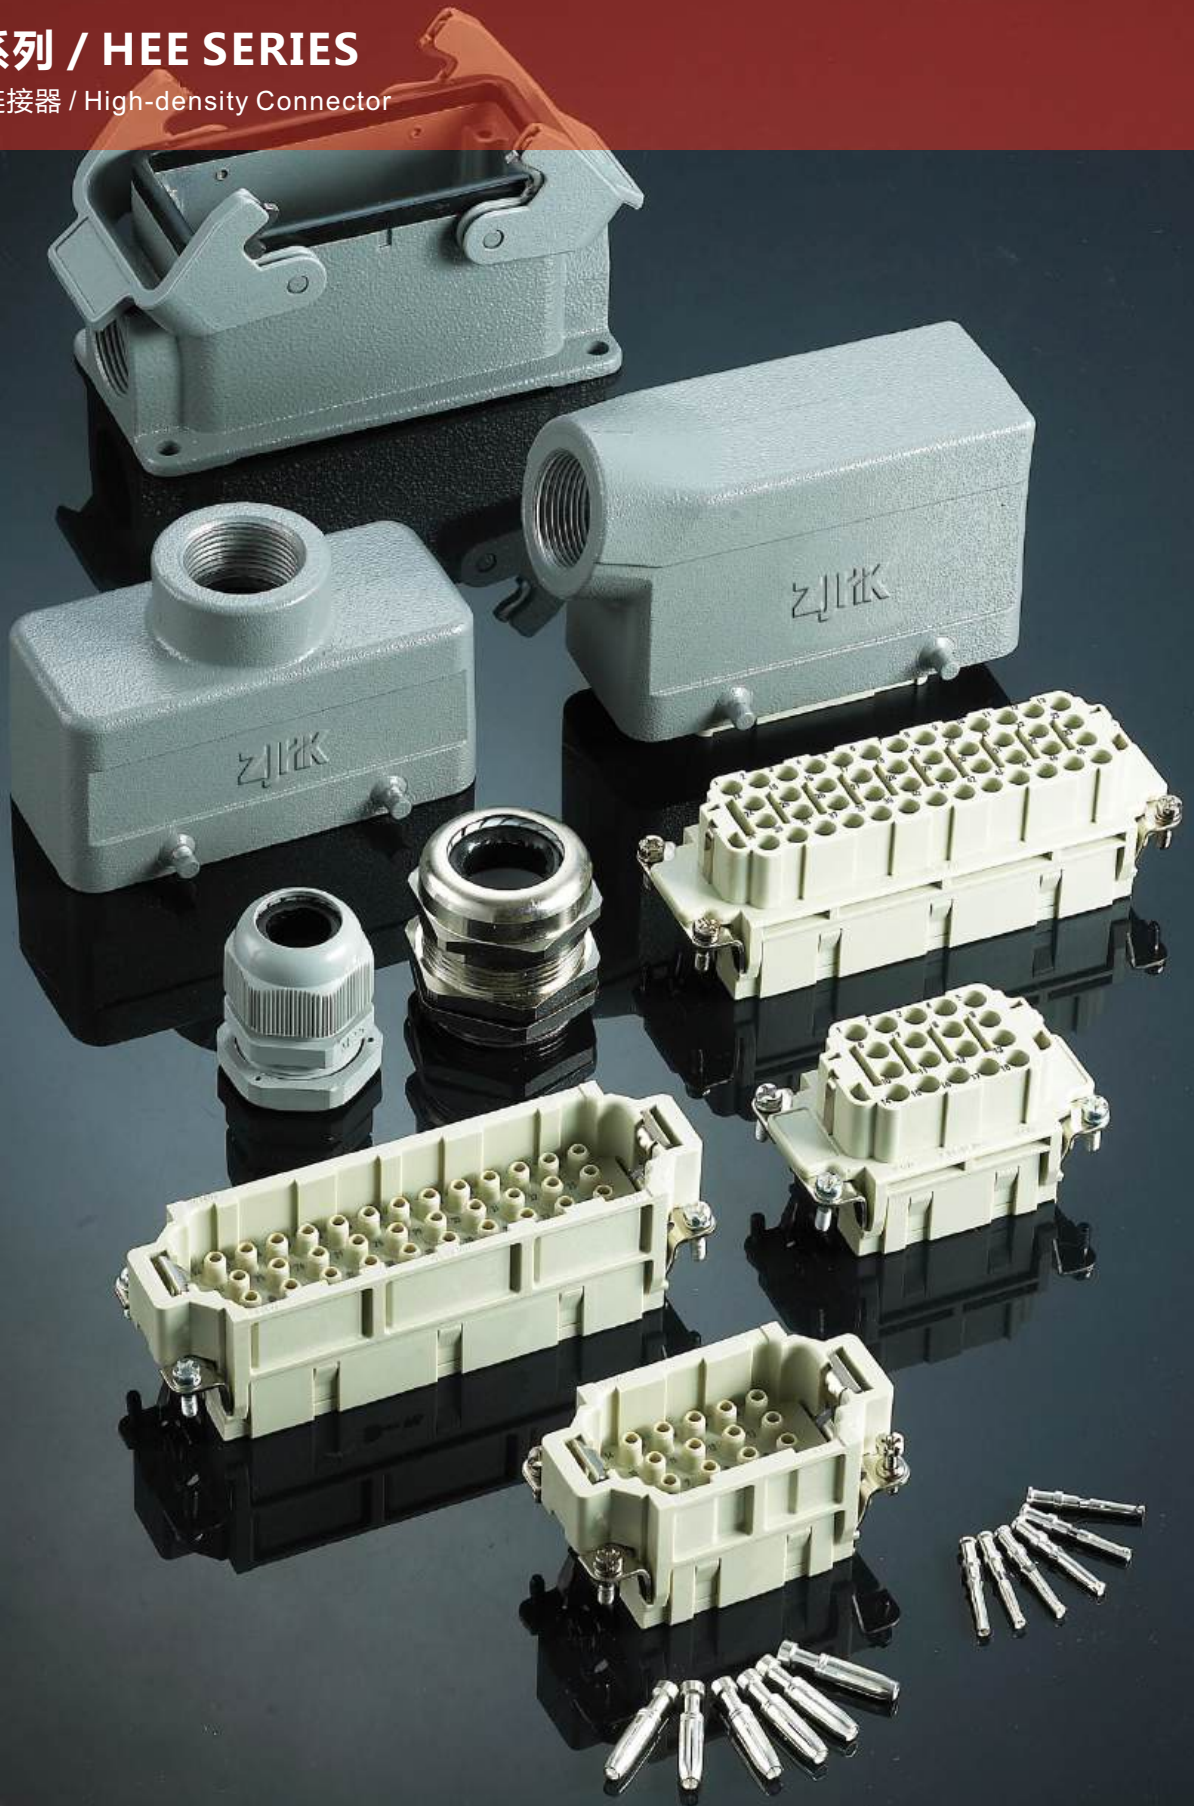



HEE 系列 / HEE SERIES

技术参数 Technical Characteristics




规范	Specifications	
规范	Specifications	DIN EN 60 664
		DIN EN 61 984
插芯	Inserts	
依据 EN 61 984的额定电压	Electrical data acc. to EN 61 984	
接插件针数	Number Of Contacts	10,18,32,46,40,64(2X32),92(2X46)+PE
额定电流	Rated Current	16A
额定电压	Rated Voltage	500V
额定脉冲电压	Rated Impulse Voltage	6kV
污染程度	Pollution Degree	3
污染等级2时的参数	Pollution Degree 2 Also	16A 830V 8kV 2
依据UL/CSA额定电压	Rated Voltage Acc.to UI CSA	600V
绝缘电阻	Insulation Resistance	$\geq 10^{10} \Omega$
材料	Material	聚碳酸酯 Polycarbonate
工作温度范围	Limiting Temperatures	-40°C...+125°C
依据UL94阻燃等级	Flammability Acc. To UL94	V0
可拔插次数	MechHEEnical Working Life-mating Cycles	≥ 500
插针	Contacts	
材料	Material	铜合金 Copper Alloy
表面处理	Surface	镀金 Hard-gold Plated
		镀银 Hard-silver Plated
接触电阻	Contact Resistance	$\leq 1m\Omega$
冷压连接	Crimp Terminal	
导线规格	Wire Gauge	0.14-4.0mm ²
AWG	Awg	26-12
剥线长度	Stripping length	7.5mm

电流负载能力 Current Carrying Capacity

电流负载能力所受的限制主要来自包含接插针的接插体可承受的最大温度

THEE current carrying is limited by maximum temperature of materials for Inserts and contacts including terminals.

测试和控制过程依据 Measuring and testing techniques according to DIN EN 60512-5

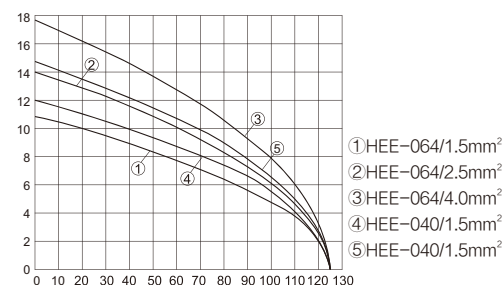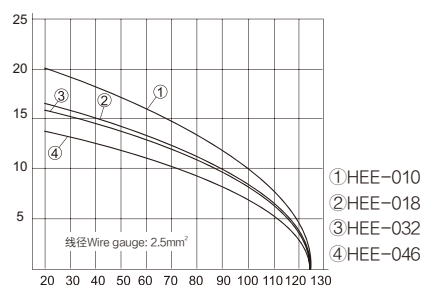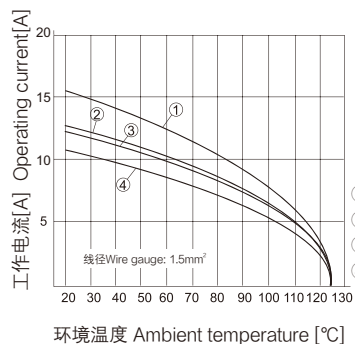


HEE调整插针分布可提高工作电压至1000V / Modified contact arrangement up to 1000V

HEE接插体在装满针时,在绝缘等级3(C)时,其工作电压可达到500V。但其插针分布经过调整,同样在绝缘等级3(C)时,其工作电压允许值可达到1000V。

The connector series HEE equipped with all contacts may be used for voltages up to 500V ~ pollution degree 3. A modified contact loading arrangement permits use up to 1000V ~ pollution degree also in pollution degree C.


调整后插针分布 Contact arrangement view from termination side

690V-绝缘等级3C Pollution degree 3

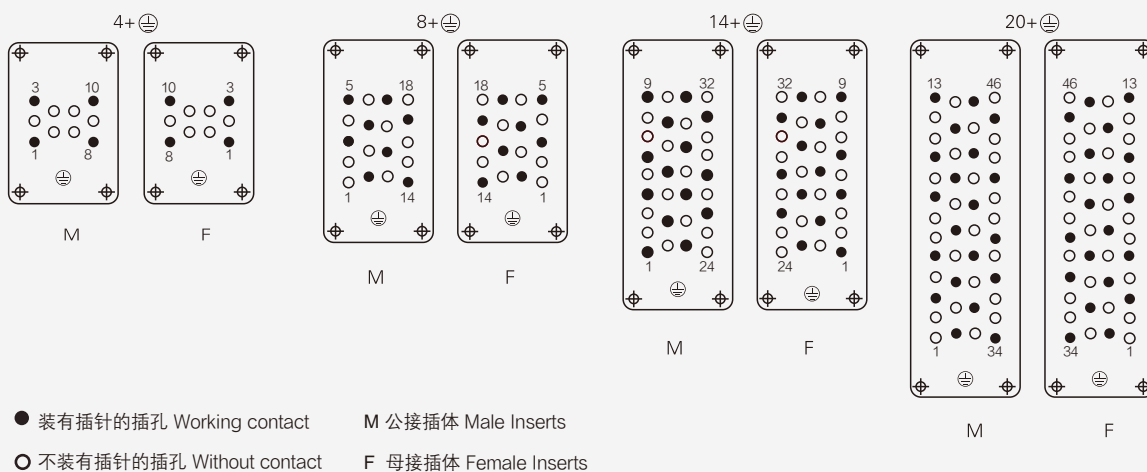

调整后插针分布 Contact arrangement view from termination side

1000V-绝缘等级3C Pollution degree 3

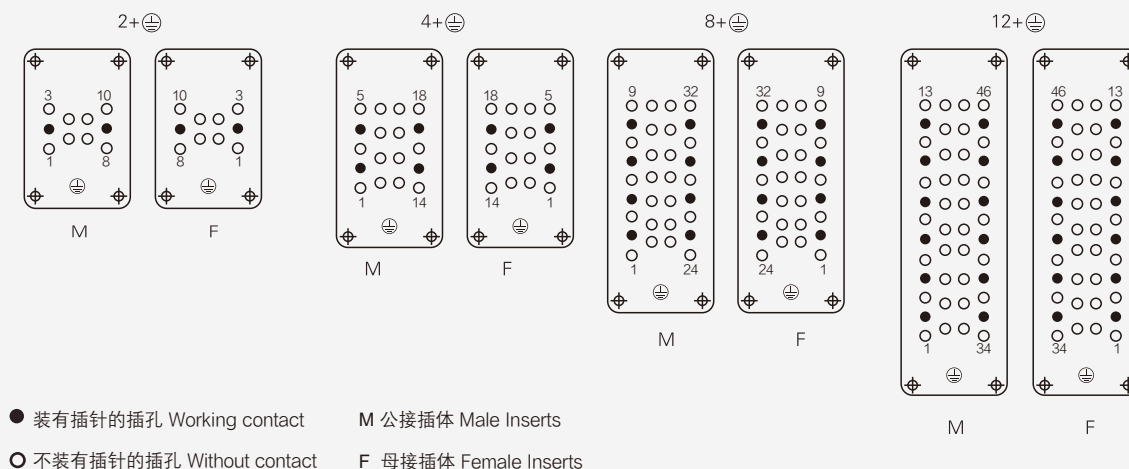



HEE-010 高密度型插芯 High-density Inserts 500V 16A 10+

插芯 Inserts

外壳尺寸：匹配6B外壳，详情请参考15-01~15-10页

Hoods/Housings：Matching 6B Hood Housing，detail on P15-01~P15-10


冷压连接 Crimp terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HEE-010-MC	09320103001
母 Female	HEE-010-FC	09320103101


1) 接插芯之间的最大距离21mm

1) Distance for contact max.21mm




接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for Inserts for use without Hoods/housings



附件 Accessories

16A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 1\text{m}\Omega$
镀银 Silver plated




镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CESM-0.37	09330006127	CESF-0.37	09330006227
CESM-0.5	09330006121	CESF-0.5	09330006220
CESM-0.75	09330006114	CESF-0.75	09330006214
CESM-1.0	09330006105	CESF-1.0	09330006205
CESM-1.5	09330006104	CESF-1.5	09330006204
CESM-2.5	09330006102	CESF-2.5	09330006202
CESM-3.0	09330006106	CESF-3.0	09330006206
CESM-4.0	09330006107	CESF-4.0	09330006207

公 Male	订货号 Part Number	母 Female	订货号 Part Number
CEGM-0.37	09330006117	CEGF-0.37	09330006217
CEGM-0.5	09330006122	CEGF-0.5	09330006222
CEGM-0.75	09330006115	CEGF-0.75	09330006215
CEGM-1.0	09330006118	CEGF-1.0	09330006218
CEGM-1.5	09330006116	CEGF-1.5	09330006216
CEGM-2.5	09330006123	CEGF-2.5	09330006223
CEGM-4.0	09330006119	CEGF-4.0	09330006221



M	F		
标示 Identification	线规 Wire gauge		剥线长度 Stripping length
no groove	014~0.37mm ²	AWG 26~22	7.5mm
no groove	0.5mm ²	AWG 20	7.5mm
1 groove	0.75mm ²	AWG 18	7.5mm
1 groove	1.0mm ²	AWG 18	7.5mm
2 groove	1.5mm ²	AWG 16	7.5mm
3 groove	2.5mm ²	AWG 14	7.5mm
wide groove	3mm ²	AWG 12	7.5mm
no groove	4mm ²	AWG 12	7.5mm

工具 Tools

冷压钳 Crimping tool



压接线经 Wire gauge	型号 Type	订货号 Part Number
0.5-4mm ²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
16A 冷压针 16A Crimp contacts	TL01	09990000059

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02



HEE-018 高密度型插芯 High-density Inserts 500V 16A 18+

插芯 Inserts

外壳尺寸：匹配10B外壳，详情请参考16-01~16-13页

Hoods/Housings：Matching 10B Hood Housing，detail on P16-01~P16-13


冷压连接 Crimp terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HEE-018-MC	09320183001
母 Female	HEE-018-FC	09320183101


1) 接插体之间的最大距离21mm

1) Distance for contact max.21mm




接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for Inserts for use without Hoods/housings



附件 Accessories

16A 冷压针 Crimp contacts


接触电阻 Contact resistance $\leq 1\text{m}\Omega$
镀银 Silver plated



镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CESM-0.37	09330006127	CESF-0.37	09330006227
CESM-0.5	09330006121	CESF-0.5	09330006220
CESM-0.75	09330006114	CESF-0.75	09330006214
CESM-1.0	09330006105	CESF-1.0	09330006205
CESM-1.5	09330006104	CESF-1.5	09330006204
CESM-2.5	09330006102	CESF-2.5	09330006202
CESM-3.0	09330006106	CESF-3.0	09330006206
CESM-4.0	09330006107	CESF-4.0	09330006207



标示 Identification	线规 Wire gauge	剥线长度 Stripping length
no groove	0.14-0.37mm ²	AWG 26-22 7.5mm
no groove	0.5mm ²	AWG 20 7.5mm
1 groove	0.75mm ²	AWG 18 7.5mm
1 groove	1mm ²	AWG 18 7.5mm
2 groove	1.5mm ²	AWG 16 7.5mm
3 groove	2.5mm ²	AWG 14 7.5mm
wide groove	3mm ²	AWG 12 7.5mm
no groove	4mm ²	AWG 12 7.5mm

工具 Tools

冷压钳 Crimping tool



压接线经 Wire gauge	型号 Type	订货号 Part Number
0.5-4mm ²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
16A 冷压针 16A Crimp contacts	TL01	09990000059

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02



HEE-032 高密度型插芯 High-density Inserts 500V 16A 32+

插芯 Inserts

外壳尺寸：匹配16B外壳，详情请参考17-01~17-21页


Hoods/Housings：Matching 16B Hood Housing，detail on P17-01~P17-21

冷压连接 Crimp terminal




插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HEE-032-MC	09320323001
母 Female	HEE-032-FC	09320323101

1) 接插芯之间的最大距离21mm
1) Distance for contact max.21mm




接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for Inserts for use without Hoods/housings



附件 Accessories

16A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 1\text{m}\Omega$
镀银 Silver plated




镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CESM-0.37	09330006127	CESF-0.37	09330006227
CESM-0.5	09330006121	CESF-0.5	09330006220
CESM-0.75	09330006114	CESF-0.75	09330006214
CESM-1.0	09330006105	CESF-1.0	09330006205
CESM-1.5	09330006104	CESF-1.5	09330006204
CESM-2.5	09330006102	CESF-2.5	09330006202
CESM-3.0	09330006106	CESF-3.0	09330006206
CESM-4.0	09330006107	CESF-4.0	09330006207

公 Male	订货号 Part Number	母 Female	订货号 Part Number
CEGM-0.37	09330006117	CEGF-0.37	09330006217
CEGM-0.5	09330006122	CEGF-0.5	09330006222
CEGM-0.75	09330006115	CEGF-0.75	09330006215
CEGM-1.0	09330006118	CEGF-1.0	09330006218
CEGM-1.5	09330006116	CEGF-1.5	09330006216
CEGM-2.5	09330006123	CEGF-2.5	09330006223
CEGM-4.0	09330006119	CEGF-4.0	09330006221



标示 Identification	线规 Wire gauge	剥线长度 Stripping length
no groove	014-0.37mm ²	AWG 26-22 7.5mm
no groove	0.5mm ²	AWG 20 7.5mm
1 groove	0.75mm ²	AWG 18 7.5mm
1 groove	1mm ²	AWG 18 7.5mm
2 groove	1.5mm ²	AWG 16 7.5mm
3 groove	2.5mm ²	AWG 14 7.5mm
wide groove	3mm ²	AWG 12 7.5mm
no groove	4mm ²	AWG 12 7.5mm

工具 Tools

冷压钳 Crimping tool



压接线经 Wire gauge	型号 Type	订货号 Part Number
0.5-4mm ²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
16A 冷压针 16A Crimp contacts	TL01	09990000059

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02

HEE-046 高密度型插芯 High-density Inserts 500V 16A 46+

插芯 Inserts

外壳尺寸：匹配24B外壳，详情请参考18-01~18-22页


Hoods/Housings：Matching 24B Hood Housing，detail on P18-01~P18-22

冷压连接 Crimp terminal




插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HEE-046-MC	09320463001
母 Female	HEE-046-FC	09320463101

1) 接插体之间的最大距离21mm
1) Distance for contact max.21mm




接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for Inserts for use without Hoods/housings



附件 Accessories

16A 冷压针 Crimp contacts


接触电阻 Contact resistance $\leq 1\text{m}\Omega$
镀银 Silver plated



镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CESM-0.37	09330006127	CESF-0.37	09330006227
CESM-0.5	09330006121	CESF-0.5	09330006220
CESM-0.75	09330006114	CESF-0.75	09330006214
CESM-1.0	09330006105	CESF-1.0	09330006205
CESM-1.5	09330006104	CESF-1.5	09330006204
CESM-2.5	09330006102	CESF-2.5	09330006202
CESM-3.0	09330006106	CESF-3.0	09330006206
CESM-4.0	09330006107	CESF-4.0	09330006207



标示 Identification	线规 Wire gauge	剥线长度 Stripping length
no groove	014-0.37mm ²	AWG 26-22 7.5mm
no groove	0.5mm ²	AWG 20 7.5mm
1 groove	0.75mm ²	AWG 18 7.5mm
1 groove	1mm ²	AWG 18 7.5mm
2 groove	1.5mm ²	AWG 16 7.5mm
3 groove	2.5mm ²	AWG 14 7.5mm
wide groove	3mm ²	AWG 12 7.5mm
no groove	4mm ²	AWG 12 7.5mm

工具 Tools

冷压钳 Crimping tool



压接线经 Wire gauge	型号 Type	订货号 Part Number
0.5-4mm ²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
16A 冷压针	TL01	09990000059
16A Crimp contacts		

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02



HEE-064 高密度型插芯 High-density Inserts 500V 16A 64+

插芯 Inserts

外壳尺寸：匹配32B外壳，详情请参考19-01~19-04页

Hoods/Housings：Matching 32B Hood Housing，detail on P19-01~P19-04


冷压连接 Crimp terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HEE-032-MC(1-32)	09320323001
	HEE-032-MC(33-64)	09320323011
母 Female	HEE-032-FC(1-32)	09320323101
	HEE-032-FC(33-64)	09320323111


1) 接插体之间的最大距离21mm

1) Distance for contact max.21mm




接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for Inserts for use without Hoods/housings



附件 Accessories

16A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 1\text{m}\Omega$
镀银 Silver plated




镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CESM-0.37	09330006127	CESF-0.37	09330006227
CESM-0.5	09330006121	CESF-0.5	09330006220
CESM-0.75	09330006114	CESF-0.75	09330006214
CESM-1.0	09330006105	CESF-1.0	09330006205
CESM-1.5	09330006104	CESF-1.5	09330006204
CESM-2.5	09330006102	CESF-2.5	09330006202
CESM-3.0	09330006106	CESF-3.0	09330006206
CESM-4.0	09330006107	CESF-4.0	09330006207

公 Male	订货号 Part Number	母 Female	订货号 Part Number
CEGM-0.37	09330006117	CEGF-0.37	09330006217
CEGM-0.5	09330006122	CEGF-0.5	09330006222
CEGM-0.75	09330006115	CEGF-0.75	09330006215
CEGM-1.0	09330006118	CEGF-1.0	09330006218
CEGM-1.5	09330006116	CEGF-1.5	09330006216
CEGM-2.5	09330006123	CEGF-2.5	09330006223
CEGM-4.0	09330006119	CEGF-4.0	09330006221



标示 Identification	线规 Wire gauge		剥线长度 Stripping length
no groove	014-0.37mm ²	AWG 26-22	7.5mm
no groove	0.5mm ²	AWG 20	7.5mm
1 groove	0.75mm ²	AWG 18	7.5mm
1 groove	1.1mm ²	AWG 18	7.5mm
2 groove	1.5mm ²	AWG 16	7.5mm
3 groove	2.5mm ²	AWG 14	7.5mm
wide groove	3mm ²	AWG 12	7.5mm
no groove	4mm ²	AWG 12	7.5mm

工具 Tools

冷压钳 Crimping tool




压接线径 Wire gauge	型号 Type	订货号 Part Number
0.5-4mm ²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
16A 冷压针	TL01	09990000059
16A Crimp contacts		

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02



HEE-092 高密度型插芯 High-density Inserts 500V 16A 92+

插芯 Inserts

外壳尺寸：匹配48B外壳，详情请参考20-01~20-02页

Hoods/Housings：Matching 48B Hood Housing，detail on P20-01~P20-02


冷压连接 Crimp terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HEE-046-MC(1-46)	09320463001
	HEE-046-MC(47-92)	09320463011
母 Female	HEE-046-FC(1-46)	09320463101
	HEE-046-FC(47-92)	09320463111

1) 接插体之间的最大距离21mm


1) Distance for contact max.21mm

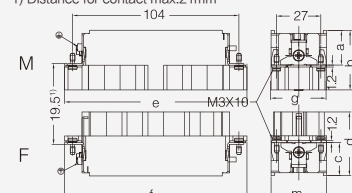

	a	b	e	g	c	d	f	m
M/F	18.5	33.8	110.5	34.4	18.3	36.2	110	34.4
MC/FC	18.3	33.8	110	34	18.2	36.5	110	34


接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for Inserts for use without Hoods/housings



附件 Accessories

16A 冷压针 Crimp contacts


接触电阻 Contact resistance $\leq 1\text{m}\Omega$
镀银 Silver plated



镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CESM-0.37	09330006127	CESF-0.37	09330006227
CESM-0.5	09330006121	CESF-0.5	09330006220
CESM-0.75	09330006114	CESF-0.75	09330006214
CESM-1.0	09330006105	CESF-1.0	09330006205
CESM-1.5	09330006104	CESF-1.5	09330006204
CESM-2.5	09330006102	CESF-2.5	09330006202
CESM-3.0	09330006106	CESF-3.0	09330006206
CESM-4.0	09330006107	CESF-4.0	09330006207



标示 Identification	线规 Wire gauge	剥线长度 Stripping length
no groove	0.14-0.37mm ²	AWG 26-22 7.5mm
no groove	0.5mm ²	AWG 20 7.5mm
1 groove	0.75mm ²	AWG 18 7.5mm
1 groove	1mm ²	AWG 18 7.5mm
2 groove	1.5mm ²	AWG 16 7.5mm
3 groove	2.5mm ²	AWG 14 7.5mm
wide groove	3mm ²	AWG 12 7.5mm
no groove	4mm ²	AWG 12 7.5mm

工具 Tools

冷压钳 Crimping tool



压接线经 Wire gauge	型号 Type	订货号 Part Number
0.5-4mm ²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
16A 冷压针 16A Crimp contacts	TL01	09990000059

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02



HEEE-040 高密度型插芯 High-density Inserts 500V 16A 40+

插芯 Inserts

外壳尺寸：匹配16B外壳，详情请参考17-01~17-21页

Hoods/Housings：Matching 16B Hood Housing，detail on P17-01~P17-21


冷压连接 Crimp terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HEEE-040-MC	09320403001
母 Female	HEEE-040-FC	09320403101


1) 接插体之间的最大距离21mm

1) Distance for contact max.21mm

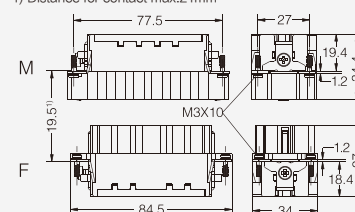


接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for Inserts for use without Hoods/housings



附件 Accessories

16A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 1\text{m}\Omega$
镀银 Silver plated




镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CESM-0.37	09330006127	CESF-0.37	09330006227
CESM-0.5	09330006121	CESF-0.5	09330006220
CESM-0.75	09330006114	CESF-0.75	09330006214
CESM-1.0	09330006105	CESF-1.0	09330006205
CESM-1.5	09330006104	CESF-1.5	09330006204
CESM-2.5	09330006102	CESF-2.5	09330006202
CESM-3.0	09330006106	CESF-3.0	09330006206
CESM-4.0	09330006107	CESF-4.0	09330006207

公 Male	订货号 Part Number	母 Female	订货号 Part Number
CEGM-0.37	09330006117	CEGF-0.37	09330006217
CEGM-0.5	09330006122	CEGF-0.5	09330006222
CEGM-0.75	09330006115	CEGF-0.75	09330006215
CEGM-1.0	09330006118	CEGF-1.0	09330006218
CEGM-1.5	09330006116	CEGF-1.5	09330006216
CEGM-2.5	09330006123	CEGF-2.5	09330006223
CEGM-4.0	09330006119	CEGF-4.0	09330006221



M		F	
标示 Identification	线规 Wire gauge		剥线长度 Stripping length
no groove	014-0.37mm ²	AWG 26-22	7.5mm
no groove	0.5mm ²	AWG 20	7.5mm
1 groove	0.75mm ²	AWG 18	7.5mm
1 groove	1mm ²	AWG 18	7.5mm
2 groove	1.5mm ²	AWG 16	7.5mm
3 groove	2.5mm ²	AWG 14	7.5mm
wide groove	3mm ²	AWG 12	7.5mm
no groove	4mm ²	AWG 12	7.5mm

工具 Tools

冷压钳 Crimping tool



压接线经 Wire gauge	型号 Type	订货号 Part Number
0.5-4mm ²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
16A 冷压针 16A Crimp contacts	TL01	09990000059

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02



HEEE-064 高密度型插芯 High-density Inserts 500V 16A 64+

插芯 Inserts

外壳尺寸：匹配24B外壳，详情请参考18-01~18-22页


Hoods/Housings : Matching 24B Hood Housing , detail on P18-01~P18-22

冷压连接 Crimp terminal




插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HEEE-064-MC	09320643001
母 Female	HEEE-064-FC	09320643101

1) 接插体之间的最大距离21mm
1) Distance for contact max.21mm

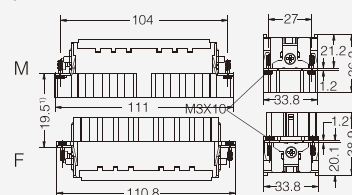


接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for Inserts for use without Hoods/housings



附件 Accessories

16A 冷压针 Crimp contacts


接触电阻 Contact resistance $\leq 1\text{m}\Omega$
镀银 Silver plated



镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CESM-0.37	09330006127	CESF-0.37	09330006227
CESM-0.5	09330006121	CESF-0.5	09330006220
CESM-0.75	09330006114	CESF-0.75	09330006214
CESM-1.0	09330006105	CESF-1.0	09330006205
CESM-1.5	09330006104	CESF-1.5	09330006204
CESM-2.5	09330006102	CESF-2.5	09330006202
CESM-3.0	09330006106	CESF-3.0	09330006206
CESM-4.0	09330006107	CESF-4.0	09330006207
CEGM-0.37	09330006117	CEGF-0.37	09330006217
CEGM-0.5	09330006122	CEGF-0.5	09330006222
CEGM-0.75	09330006115	CEGF-0.75	09330006215
CEGM-1.0	09330006118	CEGF-1.0	09330006218
CEGM-1.5	09330006116	CEGF-1.5	09330006216
CEGM-2.5	09330006123	CEGF-2.5	09330006223
CEGM-4.0	09330006119	CEGF-4.0	09330006221



M		F	
标示 Identification	线规 Wire gauge		剥线长度 Stripping length
no groove	014-0.37mm ²	AWG 26-22	7.5mm
no groove	0.5mm ²	AWG 20	7.5mm
1 groove	0.75mm ²	AWG 18	7.5mm
1 groove	1.0mm ²	AWG 18	7.5mm
2 groove	1.5mm ²	AWG 16	7.5mm
3 groove	2.5mm ²	AWG 14	7.5mm
wide groove	3mm ²	AWG 12	7.5mm
no groove	4mm ²	AWG 12	7.5mm

工具 Tools

冷压钳 Crimping tool



压接线规 Wire gauge	型号 Type	订货号 Part Number
0.5-4mm ²	TL02G	09990000021

退针器 Removal tool




适用类型 For	型号 Type	订货号 Part Number
16A 冷压针	TL01	09990000059
16A Crimp contacts		

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02

HD 系列 / HD SERIES

超高密度型连接器 / Ultra-high Density Connector

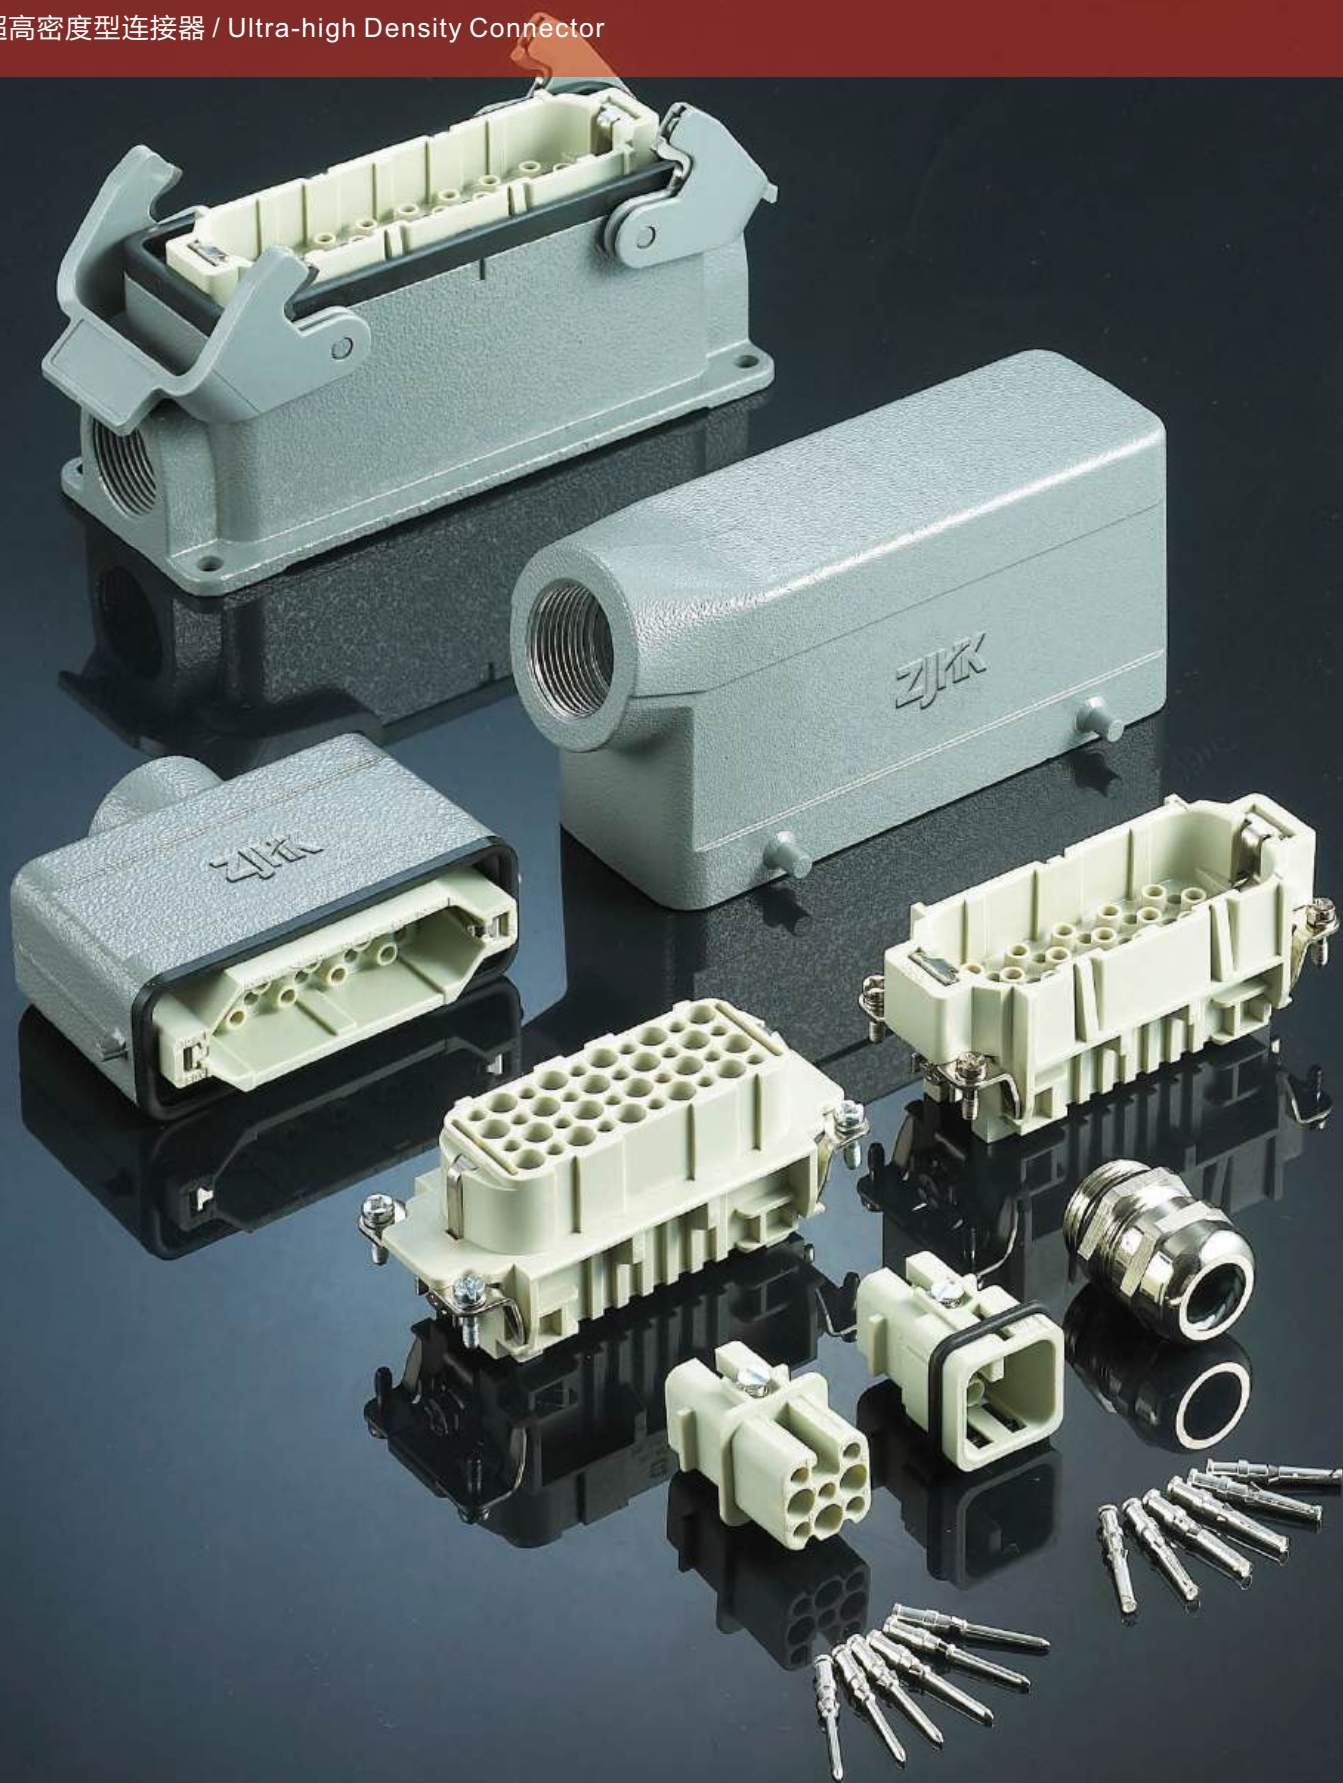



HD 系列 / HD SERIES

技术参数 Technical Characteristics



规范	Specifications	
规范	Specifications	DIN EN 60 664
		DIN EN 61 984
插芯	Inserts	
依据 EN 61 984的额定电压	Electrical data acc. to EN 61 984	
接插件针数	Number Of Contacts	7,8,15,25,40,50(25X2),,64,80(40X2),128(64x2)+PE
额定电流	Rated Current	10A
额定电压	Rated Voltage	250V
额定脉冲电压	Rated Impulse Voltage	4kV
污染程度	Pollution Degree	3
污染等级2时的参数	Pollution Degree 2 Also	10A 230/400V 4kV 2
依据UL/CSA额定电压	Rated Voltage Acc.to UI CSA	600V
依据CSA绕线连接的额定电压	Rated Voltage For Wrap Terminal Acc. To CSA	2A 30V
HD-008的电气数据		
额定电流	Rated Current	10A
额定电压	Rated Voltage	~50V/-120V
额定脉冲电压	Rated Impulse Voltage	4kV
污染程度	Pollution Degree	3
依据UL/CSA额定电压	Rated Voltage Acc.to UI CSA	50V
额定电压 (直流电压)	Rated Voltage	120V
绝缘电阻	Insulation Resistance	$\geq 10^{10} \Omega$
材料	Material	聚碳酸酯 Polycarbonate
工作温度范围	Limiting Temperatures	-40°C...+125°C
依据UL94阻燃等级	Flammability Acc. To UL94	V0
可拔插次数	Mechanical Working Life-mating Cycles	≥ 500
插针	Contacts	
材料	Material	铜合金 Copper Alloy
表面处理	Surface	镀金 Hard-gold Plated
		镀银 Hard-silver Plated
接触电阻	Contact Resistance	$\leq 3m \Omega$
冷压连接	Screw Terminal	
导线规格	Wire Gauge	0.14-2.5mm ²
AWG	AWG	26-14

电流负载能力 Current Carrying Capacity

电流负载能力所受的限制主要来自包含接插针的接插体可承受的最大温度

The current carrying is limited by maximum temperature of materials for Inserts and contacts including terminals.

测试和控制过程依据 Measuring and testing techniques according to DIN EN 60512-5

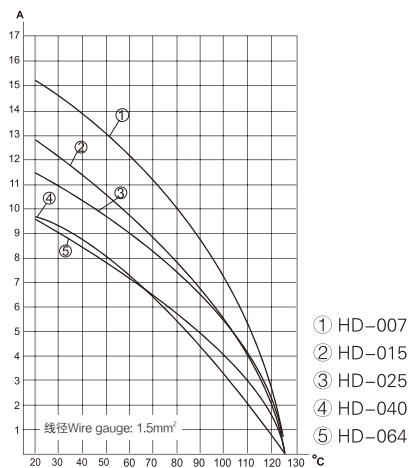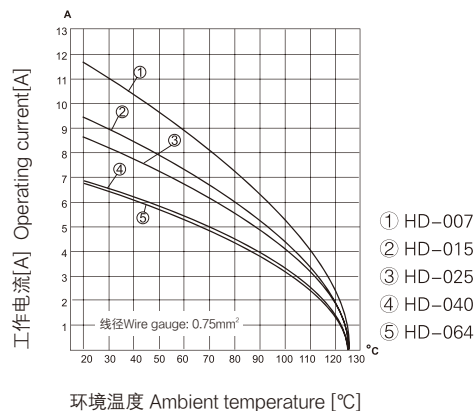


HD调整插针分布可提高工作电压至500V / Modified contact arrangement up to 500V

HD接插体在装满针时,在绝缘等级3(C)时,其工作电压可达到250V。但其插针分布经过调整,同样在绝缘等级3(C)时,其工作电压允许值可达到500V。

The connector series HD equipped with all contacts may be used for voltages up to 250V ~ pollution degree 3.A modified contact loading arrangement permits use up to 500V ~ pollution degree also in pollution degree C.

调整后插针分布 Contact arrangement view from termination side

10A 500V 6kV 3

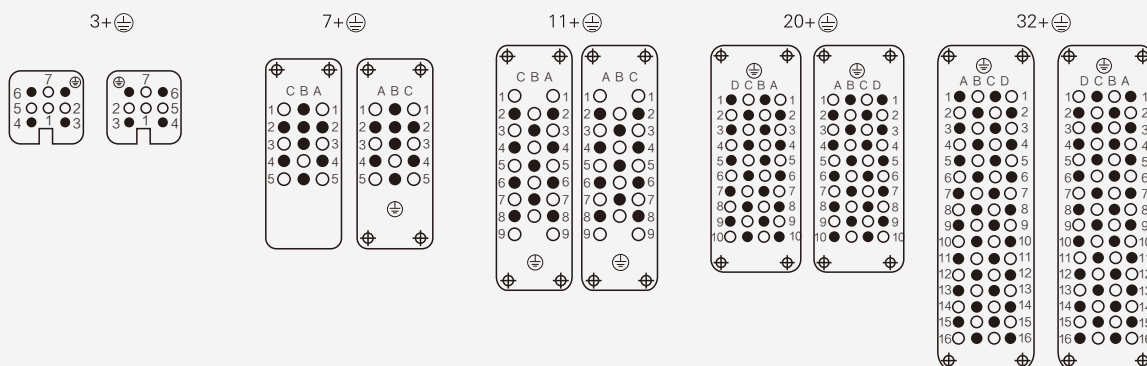

- 装有插针的插孔 Working contact
- 不装有插针的插孔 Without contact
- M 公接插体 Male insert
- F 母接插体 Female insert



HD-007 超高密度型插芯 Ultra-high Density Inserts 250V 10A 7+

插芯 Inserts


外壳尺寸：匹配10A外壳，详情请参12-01~12-02页

Hoods/Housings：Matching 10A Hood Housing，detail on P12-01~P12-02

冷压连接 Crimp terminal




插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HD-007-MC	09210073031
母 Female	HD-007-FC	09210073131

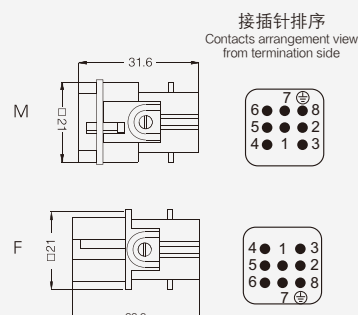

快速上锁 Quick lock



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HD-007-MQ	09210072632
母 Female	HD-007-FQ	09210072732



附件 Accessories

10A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 3m\Omega$
镀银 Silver plated




公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDSM-0.37	09150006104	CDSF-0.37	09150006204
CDSM-0.5	09150006103	CDSF-0.5	09150006203
CDSM-0.75	09150006105	CDSF-0.75	09150006205
CDSM-1.0	09150006102	CDSF-1.0	09150006202
CDSM-1.5	09150006101	CDSF-1.5	09150006201
CDSM-2.5	09150006106	CDSF-2.5	09150006206

镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDGM-0.37	09150006124	CDGF-0.37	09150006224
CDGM-0.5	09150006123	CDGF-0.5	09150006223
CDGM-0.75	09150006125	CDGF-0.75	09150006225
CDGM-1.0	09150006122	CDGF-1.0	09150006222
CDGM-1.5	09150006121	CDGF-1.5	09150006221
CDGM-2.5	09150006126	CDGF-2.5	09150006226

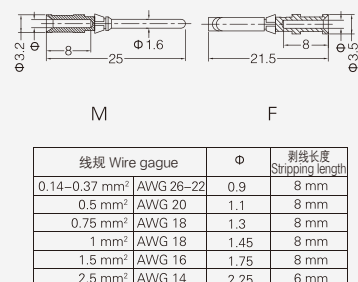

工具 Tools

冷压钳 Crimping tool




压接线径 Wire gauge	型号 Type	订货号 Part Number
0.14-4mm²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
10A 冷压针 10A Crimp contacts	TL00	09990000012

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02



HD-008 超高密度型插芯 Ultra-high Density Inserts -120V/~50V 10A 8+

插芯 Inserts


外壳尺寸：匹配3A外壳，详情请参考11-05~11-11页

Hoods/Housings : Matching 3A Hood Housing , detail on P11-05~P11-11

冷压连接 Crimp terminal




插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HD-008-MC	09360083001
母 Female	HD-008-FC	09360083101



快速上锁 Quick lock



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HD-008-MQ	09360082632
母 Female	HD-008-FQ	09360082732



附件 Accessories

10A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 3\text{m}\Omega$
镀银 Silver plated




公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDSM-0.37	09150006104	CDSF-0.37	09150006204
CDSM-0.5	09150006103	CDSF-0.5	09150006203
CDSM-0.75	09150006105	CDSF-0.75	09150006205
CDSM-1.0	09150006102	CDSF-1.0	09150006202
CDSM-1.5	09150006101	CDSF-1.5	09150006201
CDSM-2.5	09150006106	CDSF-2.5	09150006206

镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDGM-0.37	09150006124	CDGF-0.37	09150006224
CDGM-0.5	09150006123	CDGF-0.5	09150006223
CDGM-0.75	09150006125	CDGF-0.75	09150006225
CDGM-1.0	09150006122	CDGF-1.0	09150006222
CDGM-1.5	09150006121	CDGF-1.5	09150006221
CDGM-2.5	09150006126	CDGF-2.5	09150006226



线规 Wire gauge	Φ	剥线长度 Stripping length
0.14~0.37 mm ²	AWG 26-22	0.9 8 mm
0.5 mm ²	AWG 20	1.1 8 mm
0.75 mm ²	AWG 18	1.3 8 mm
1 mm ²	AWG 18	1.45 8 mm
1.5 mm ²	AWG 16	1.75 8 mm
2.5 mm ²	AWG 14	2.25 6 mm

工具 Tools

冷压钳 Crimping tool



压接线径 Wire gauge	型号 Type	订货号 Part Number
0.14~4mm ²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
10A 冷压针 10A Crimp contacts	TL00	09990000012

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02



HD-015 超高密度型插芯 Ultra-high Density Inserts 250V 10A 15+

插芯 Inserts

外壳尺寸：匹配10A外壳，详情请参12-01~12-02页

Hoods/Housings：Matching 10A Hood Housing，detail on P12-01~P12-02


冷压连接 Crimp terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HD-015-MC	09210153001
母 Female	HD-015-FC	09210153101


1) 接插体之间的最大距离24mm

1) Distance for contact max.24mm




接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for inserts for use without Hoods/housings



附件 Accessories

10A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 3\text{m}\Omega$
镀银 Silver plated




公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDSM-0.37	09150006104	CDSF-0.37	09150006204
CDSM-0.5	09150006103	CDSF-0.5	09150006203
CDSM-0.75	09150006105	CDSF-0.75	09150006205
CDSM-1.0	09150006102	CDSF-1.0	09150006202
CDSM-1.5	09150006101	CDSF-1.5	09150006201
CDSM-2.5	09150006106	CDSF-2.5	09150006206

镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDGM-0.37	09150006124	CDGF-0.37	09150006224
CDGM-0.5	09150006123	CDGF-0.5	09150006223
CDGM-0.75	09150006125	CDGF-0.75	09150006225
CDGM-1.0	09150006122	CDGF-1.0	09150006222
CDGM-1.5	09150006121	CDGF-1.5	09150006221
CDGM-2.5	09150006126	CDGF-2.5	09150006226



线规 Wire gauge	Φ	剥线长度 Stripping length
0.14-0.37 mm ²	AWG 26-22	0.9 8 mm
0.5 mm ²	AWG 20	1.1 8 mm
0.75 mm ²	AWG 18	1.3 8 mm
1 mm ²	AWG 18	1.45 8 mm
1.5 mm ²	AWG 16	1.75 8 mm
2.5 mm ²	AWG 14	2.25 6 mm

工具 Tools

冷压钳 Crimping tool




压接线径 Wire gauge	型号 Type	订货号 Part Number
0.14-4mm ²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
10A 冷压针 10A Crimp contacts	TL00	09990000012

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02



HD-025 超高密度型插芯 Ultra-high Density Inserts 250V 10A 25+

插芯 Inserts

外壳尺寸：匹配16A外壳，详情请参考13-01~13-02页

Hoods/Housings：Matching 16A Hood Housing，detail on P13-01~P13-02


冷压连接 Crimp terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HD-025-MC	09210253001
母 Female	HD-025-FC	09210253101


1) 接插体之间的最大距离24mm

1) Distance for contact max.24mm




接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for inserts for use without Hoods/housings



附件 Accessories

10A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 3m\Omega$
镀银 Silver plated




公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDSM-0.37	09150006104	CDSF-0.37	09150006204
CDSM-0.5	09150006103	CDSF-0.5	09150006203
CDSM-0.75	09150006105	CDSF-0.75	09150006205
CDSM-1.0	09150006102	CDSF-1.0	09150006202
CDSM-1.5	09150006101	CDSF-1.5	09150006201
CDSM-2.5	09150006106	CDSF-2.5	09150006206

镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDGM-0.37	09150006124	CDGF-0.37	09150006224
CDGM-0.5	09150006123	CDGF-0.5	09150006223
CDGM-0.75	09150006125	CDGF-0.75	09150006225
CDGM-1.0	09150006122	CDGF-1.0	09150006222
CDGM-1.5	09150006121	CDGF-1.5	09150006221
CDGM-2.5	09150006126	CDGF-2.5	09150006226



线规 Wire gauge	Φ	剥线长度 Stripping length
0.14-0.37 mm ²	AWG 26-22	0.9 8 mm
0.5 mm ²	AWG 20	1.1 8 mm
0.75 mm ²	AWG 18	1.3 8 mm
1 mm ²	AWG 18	1.45 8 mm
1.5 mm ²	AWG 16	1.75 8 mm
2.5 mm ²	AWG 14	2.25 6 mm

工具 Tools

冷压钳 Crimping tool




压接线径 Wire gauge	型号 Type	订货号 Part Number
0.14-4mm ²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
10A 冷压针 10A Crimp contacts	TL00	09990000012

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02



HD-040 超高密度型插芯 Ultra-high Density Inserts 250V 10A 40+

插芯 Inserts


外壳尺寸：匹配16B外壳，详情请参考17-01~17-21页
Hoods/Housings：Matching 16B Hood Housing，detail on P17-01~P17-21

冷压连接 Crimp terminal




插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HD-040-MC	09210403001
母 Female	HD-040-FC	09210403101


1) 接插体之间的最大距离24mm
1) Distance for contact max.24mm



接插针排序
Contacts arrangement view from termination side



面板安装开孔图
Panel cut out for inserts for use without Hoods/housings



附件 Accessories

10A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 3\text{m}\Omega$
镀银 Silver plated




公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDSM-0.37	09150006104	CDSF-0.37	09150006204
CDSM-0.5	09150006103	CDSF-0.5	09150006203
CDSM-0.75	09150006105	CDSF-0.75	09150006205
CDSM-1.0	09150006102	CDSF-1.0	09150006202
CDSM-1.5	09150006101	CDSF-1.5	09150006201
CDSM-2.5	09150006106	CDSF-2.5	09150006206

镀金 Gold plated



CDGM-0.37	09150006124	CDGF-0.37	09150006224
CDGM-0.5	09150006123	CDGF-0.5	09150006223
CDGM-0.75	09150006125	CDGF-0.75	09150006225
CDGM-1.0	09150006122	CDGF-1.0	09150006222
CDGM-1.5	09150006121	CDGF-1.5	09150006221
CDGM-2.5	09150006126	CDGF-2.5	09150006226



线规 Wire gauge	Φ	剥线长度 Stripping length
0.14-0.37 mm ²	AWG 26-22	0.9 8 mm
0.5 mm ²	AWG 20	1.1 8 mm
0.75 mm ²	AWG 18	1.3 8 mm
1 mm ²	AWG 18	1.45 8 mm
1.5 mm ²	AWG 16	1.75 8 mm
2.5 mm ²	AWG 14	2.25 6 mm

工具 Tools

冷压钳 Crimping tool




压接线经 Wire gauge	型号 Type	订货号 Part Number
0.14-4mm ²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
10A 冷压针 10A Crimp contacts	TL00	09990000012

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02



HD-050 超高密度型插芯 Ultra-high Density Inserts 250V 10A 50+

插芯 Inserts

外壳尺寸：匹配32A外壳，详情请参考14-01~14-02页

Hoods/Housings：Matching 32A Hood Housing，detail on P14-01~P14-02


冷压连接 Crimp terminal

插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HD-025-MC(1-25)	09210253001
	HD-025-MC(1-25)	09210253001
母 Female	HD-025-FC(1-25)	09210253101
	HD-025-FC(1-25)	09210253101




1) 接插体之间的最大距离24mm

1) Distance for contact max.24mm




接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for inserts for use without Hoods/housings



附件 Accessories

10A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 3m\Omega$
镀银 Silver plated




公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDSM-0.37	09150006104	CDSF-0.37	09150006204
CDSM-0.5	09150006103	CDSF-0.5	09150006203
CDSM-0.75	09150006105	CDSF-0.75	09150006205
CDSM-1.0	09150006102	CDSF-1.0	09150006202
CDSM-1.5	09150006101	CDSF-1.5	09150006201
CDSM-2.5	09150006106	CDSF-2.5	09150006206

镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDGM-0.37	09150006124	CDGF-0.37	09150006224
CDGM-0.5	09150006123	CDGF-0.5	09150006223
CDGM-0.75	09150006125	CDGF-0.75	09150006225
CDGM-1.0	09150006122	CDGF-1.0	09150006222
CDGM-1.5	09150006121	CDGF-1.5	09150006221
CDGM-2.5	09150006126	CDGF-2.5	09150006226



线规 Wire gauge	Φ	剥线长度 Stripping length
0.14-0.37 mm ² AWG 26-22	0.9	8 mm
0.5 mm ² AWG 20	1.1	8 mm
0.75 mm ² AWG 18	1.3	8 mm
1 mm ² AWG 18	1.45	8 mm
1.5 mm ² AWG 16	1.75	8 mm
2.5 mm ² AWG 14	2.25	6 mm

工具 Tools

冷压钳 Crimping tool



压接线径 Wire gauge	型号 Type	订货号 Part Number
0.14-4mm ²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
10A 冷压针 10A Crimp contacts	TL00	09990000012

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02



HD-064 超高密度型插芯 Ultra-high Density Inserts 250V 10A 64+

插芯 Inserts

外壳尺寸：匹配24B外壳，详情请参考18-01~18-22页

Hoods/Housings：Matching 24B Hood Housing，detail on P18-01~P18-22


冷压连接 Crimp terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HD-064-MC	09210643001
母 Female	HD-064-FC	09210643101


1) 接插体之间的最大距离24mm

1) Distance for contact max.24mm




接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for inserts for use without Hoods/housings



附件 Accessories

10A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 3\text{m}\Omega$
镀银 Silver plated




公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDSM-0.37	09150006104	CDSF-0.37	09150006204
CDSM-0.5	09150006103	CDSF-0.5	09150006203
CDSM-0.75	09150006105	CDSF-0.75	09150006205
CDSM-1.0	09150006102	CDSF-1.0	09150006202
CDSM-1.5	09150006101	CDSF-1.5	09150006201
CDSM-2.5	09150006106	CDSF-2.5	09150006206

镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDGM-0.37	09150006124	CDGF-0.37	09150006224
CDGM-0.5	09150006123	CDGF-0.5	09150006223
CDGM-0.75	09150006125	CDGF-0.75	09150006225
CDGM-1.0	09150006122	CDGF-1.0	09150006222
CDGM-1.5	09150006121	CDGF-1.5	09150006221
CDGM-2.5	09150006126	CDGF-2.5	09150006226



线规 Wire gauge	Φ	剥线长度 Stripping length
0.14-0.37 mm ² AWG 26-22	0.9	8 mm
0.5 mm ² AWG 20	1.1	8 mm
0.75 mm ² AWG 18	1.3	8 mm
1 mm ² AWG 18	1.45	8 mm
1.5 mm ² AWG 16	1.75	8 mm
2.5 mm ² AWG 14	2.25	6 mm

工具 Tools

冷压钳 Crimping tool




压接线经 Wire gauge	型号 Type	订货号 Part Number
0.14-4mm ²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
10A 冷压针 10A Crimp contacts	TL00	09990000012

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02



HD-080 超高密度型插芯 Ultra-high Density Inserts 250V 10A 80+

插芯 Inserts

外壳尺寸：匹配32B外壳，详情请参考19-01~19-04页

Hoods/Housings：Matching 32B Hood Housing，detail on P19-01~P19-04


冷压连接 Crimp terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HD-040-MC(1-40)	09210403001
	HD-040-MC(1-40)	09210403001
母 Female	HD-040-FC(1-40)	09210403101
	HD-040-FC(1-40)	09210403101


1) 接插体之间的最大距离24mm

1) Distance for contact max.24mm




接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for inserts for use without Hoods/housings



附件 Accessories

10A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 3\text{m}\Omega$
镀银 Silver plated




公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDSM-0.37	09150006104	CDSF-0.37	09150006204
CDSM-0.5	09150006103	CDSF-0.5	09150006203
CDSM-0.75	09150006105	CDSF-0.75	09150006205
CDSM-1.0	09150006102	CDSF-1.0	09150006202
CDSM-1.5	09150006101	CDSF-1.5	09150006201
CDSM-2.5	09150006106	CDSF-2.5	09150006206

镀金 Gold plated



CDGM-0.37	09150006124	CDGF-0.37	09150006224
CDGM-0.5	09150006123	CDGF-0.5	09150006223
CDGM-0.75	09150006125	CDGF-0.75	09150006225
CDGM-1.0	09150006122	CDGF-1.0	09150006222
CDGM-1.5	09150006121	CDGF-1.5	09150006221
CDGM-2.5	09150006126	CDGF-2.5	09150006226



线规 Wire gauge	Φ	剥线长度 Stripping length
0.14-0.37 mm ²	AWG 26-22	0.9 8 mm
0.5 mm ²	AWG 20	1.1 8 mm
0.75 mm ²	AWG 18	1.3 8 mm
1 mm ²	AWG 18	1.45 8 mm
1.5 mm ²	AWG 16	1.75 8 mm
2.5 mm ²	AWG 14	2.25 6 mm

工具 Tools

冷压钳 Crimping tool



压接导线 Wire gauge	型号 Type	订货号 Part Number
0.14-4mm ²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
10A 冷压针 10A Crimp contacts	TL00	09990000012

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02



HD-128 超高密度型插芯 Ultra-high Density Inserts 250V 10A 128+

插芯 Inserts

外壳尺寸：匹配48B外壳，详情请参考20-01~20-02页


Hoods/Housings：Matching 48B Hood Housing，detail on P20-01~P20-02

冷压连接 Crimp terminal




插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HD-064-MC(1-64)	09210643001
	HD-064-MC(1-64)	09210643001
母 Female	HD-064-FC(1-64)	09210643101
	HD-064-FC(1-64)	09210643101

1) 接插体之间的最大距离24mm
1) Distance for contact max.24mm




接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for inserts for use without Hoods/housings



附件 Accessories

10A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 3m\Omega$
镀银 Silver plated




公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDSM-0.37	09150006104	CDSF-0.37	09150006204
CDSM-0.5	09150006103	CDSF-0.5	09150006203
CDSM-0.75	09150006105	CDSF-0.75	09150006205
CDSM-1.0	09150006102	CDSF-1.0	09150006202
CDSM-1.5	09150006101	CDSF-1.5	09150006201
CDSM-2.5	09150006106	CDSF-2.5	09150006206

镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDGM-0.37	09150006124	CDGF-0.37	09150006224
CDGM-0.5	09150006123	CDGF-0.5	09150006223
CDGM-0.75	09150006125	CDGF-0.75	09150006225
CDGM-1.0	09150006122	CDGF-1.0	09150006222
CDGM-1.5	09150006121	CDGF-1.5	09150006221
CDGM-2.5	09150006126	CDGF-2.5	09150006226



线规 Wire gauge	Φ	剥线长度 Stripping length
0.14-0.37 mm ²	AWG 26-22	0.9 8 mm
0.5 mm ²	AWG 20	1.1 8 mm
0.75 mm ²	AWG 18	1.3 8 mm
1 mm ²	AWG 18	1.45 8 mm
1.5 mm ²	AWG 16	1.75 8 mm
2.5 mm ²	AWG 14	2.25 6 mm

工具 Tools

冷压钳 Crimping tool



压接线经 Wire gauge	型号 Type	订货号 Part Number
0.14-4mm ²	TL02G	09990000021

退针器 Removal tool




适用类型 For	型号 Type	订货号 Part Number
10A 冷压针 10A Crimp contacts	TL00	09990000012

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02

HDD 系列 / HDD SERIES

超高密度型连接器 / Ultra-high Density Connector

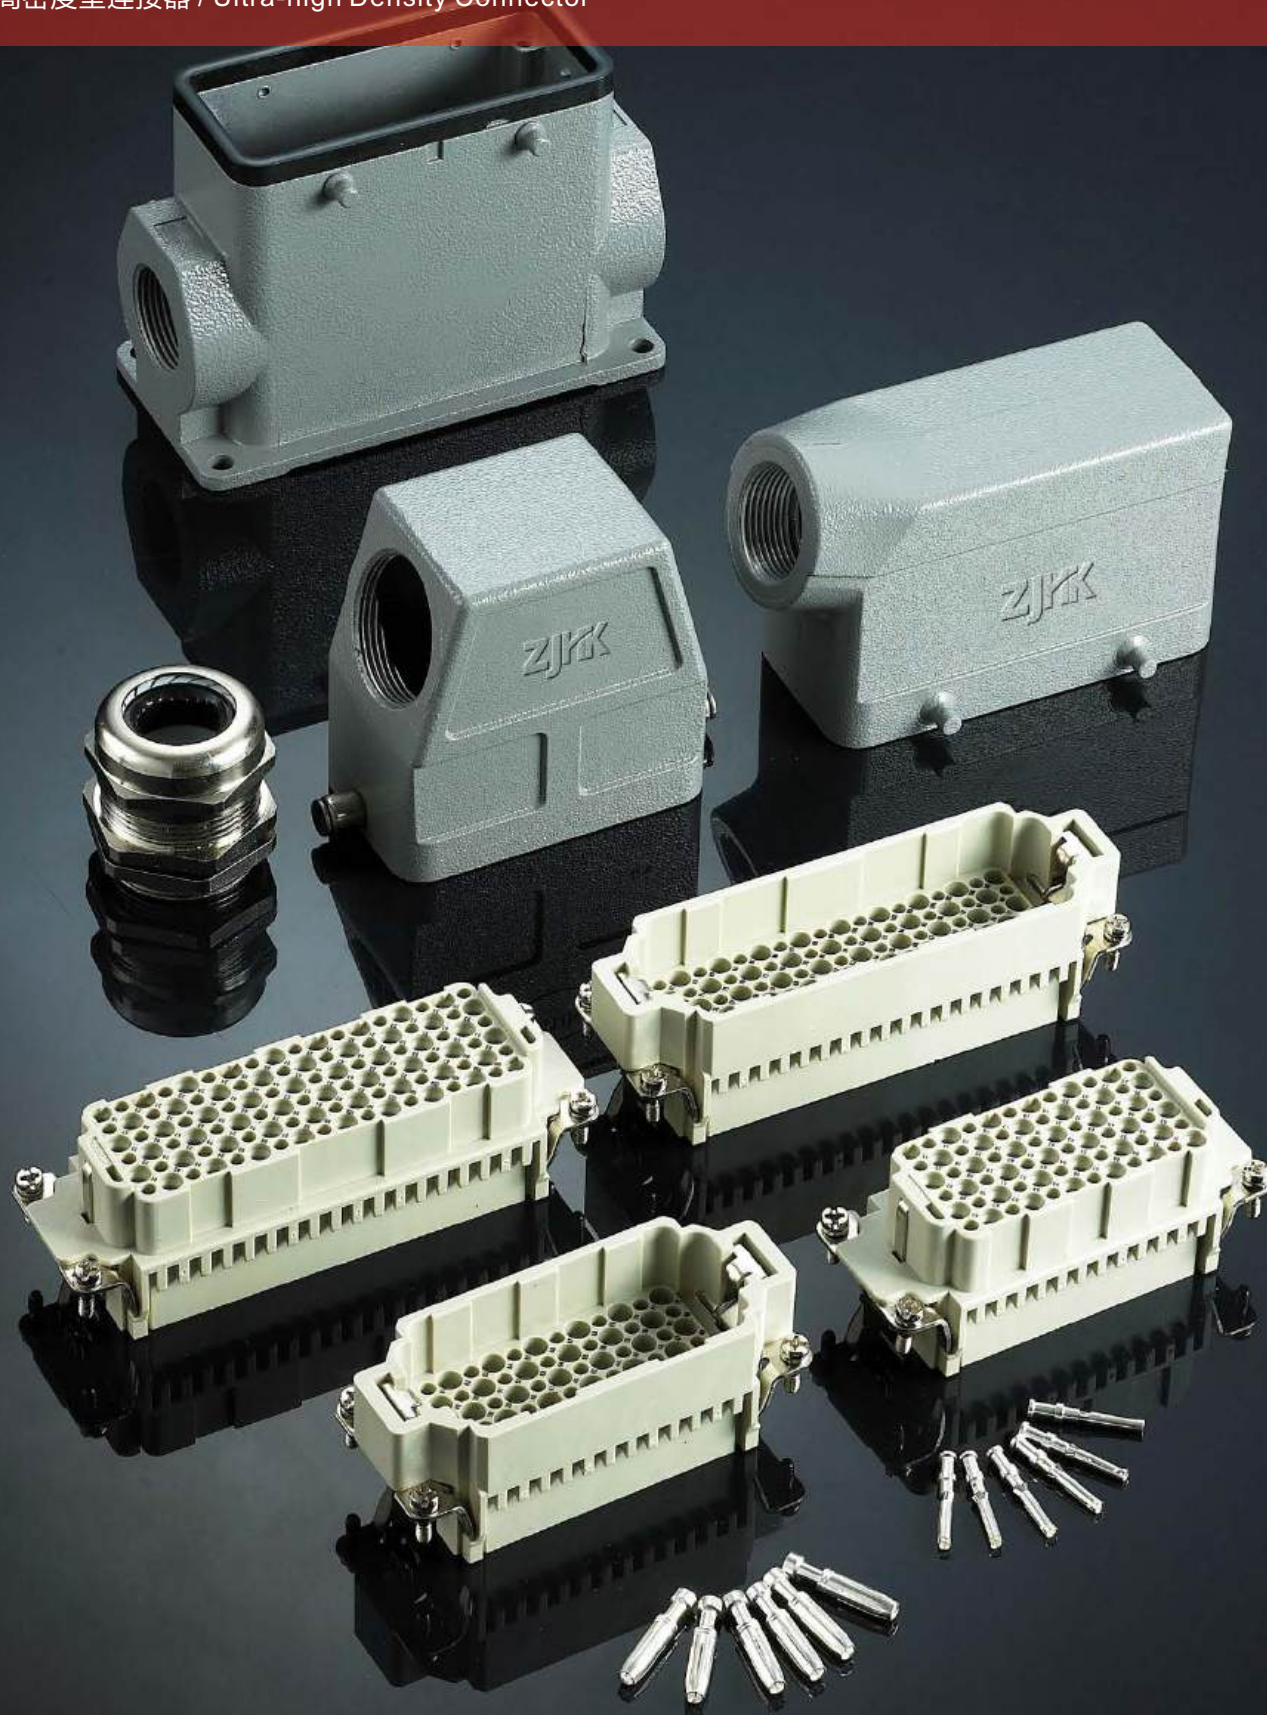



HDD 系列 / HDD SERIES

技术参数 Technical Characteristics



规范	Specifications	
规范	Specifications	DIN EN 60 664
		DIN EN 61 984
插芯	Inserts	
依据 EN 61 984的额定电压	Electrical Data Acc. To EN 61 984	
接插件针数	Number Of Contacts	24,42,72, 108, 144(72X2),216(108X2)+PE
额定电流	Rated Current	10A
额定电压	Rated Voltage	250V
额定脉冲电压	Rated Impulse Voltage	4kV
污染程度	Pollution Degree	3
污染等级2时的参数	Pollution Degree 2 Also	10A 230/400V 4kV 2
依据UL/CSA额定电压	Rated Voltage Acc.to UI CSA	600V
绝缘电阻	Insulation Resistance	$\geq 10^{10} \Omega$
材料	Material	聚碳酸酯 Polycarbonate
工作温度范围	Limiting Temperatures	-40°C...+125°C
依据UL94阻燃等级	Flammability Acc. To UL94	V0
可拔插次数	Mechanical Working Life-mating Cycles	≥ 500
插针	Contacts	
材料	Material	铜合金 Copper Alloy
表面处理	Surface	镀金 Hard-gold Plated
		镀银 Hard-silver Plated
接触电阻	Contact Resistance	$\leq 3m\Omega$
螺钉连接	Screw Terminal	
导线规格	Wire Gauge	0.14-2.5mm ²
AWG	AWG	26-14

电流负载能力 Current Carrying Capacity

电流负载能力所受的限制主要来自包含接插针的接插体可承受的最大温度

The current carrying is limited by maximum temperature of materials for Inserts and contacts including terminals.

测试和控制过程依据 Measuring and testing techniques according to DIN EN 60512-5

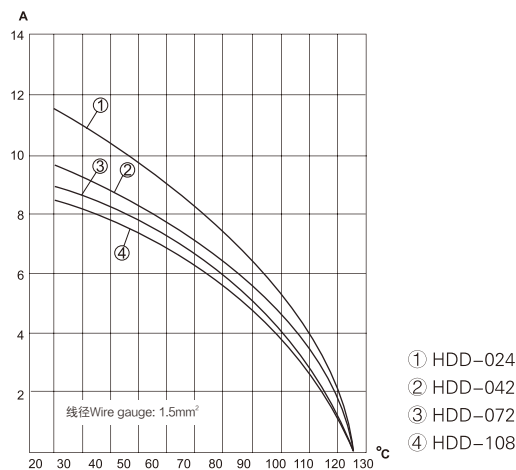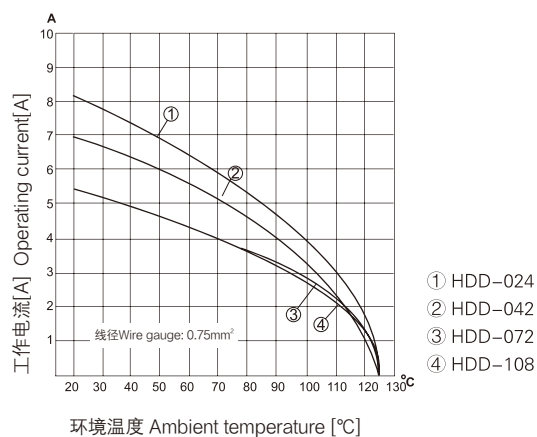

HDD调整插针分布可提高工作电压至500V / Modified contact arrangement up to 500V


HD接插体在装满针时,在绝缘等级3(C)时,其工作电压可达到250V。但其插针分布经过调整,同样在绝缘等级3(C)时,其工作电压允许值可达到500V。

The connector series HDD equipped with all contacts may be used for voltages up to 250V ~ pollution degree 3.A modified contact loading arrangement permits use up to 500V ~ pollution degree also in pollution degree C.


调整后插针分布 Contact arrangement view from termination side

10A 400V 6kV 3


12+ ⊕




21+ ⊕



34+ ⊕




52+ ⊕




10A 500V 6kV 3


5+ ⊕




11+ ⊕




17+ ⊕



26+ ⊕



- 装有插针的插孔 Working contact M 公接插体 Male insert
- 不装有插针的插孔 Without contact F 母接插体 Female insert



HDD-024 超高密度型插芯 Ultra-high Density Inserts 250V 10A 24+

插芯 Inserts

外壳尺寸：匹配6B外壳，详情请参考15-01~15-10页


Hoods/Housings：Matching 6B Hood Housing，detail on P15-01~P15-10

冷压连接 Crimp terminal




插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HDD-024-MC	09160243001
母 Female	HDD-024-FC	09160243101

1) 接插体之间的最大距离21mm
1) Distance for contact max.21mm




接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for inserts for use without Hoods/housings



附件 Accessories

10A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 3\text{m}\Omega$
镀银 Silver plated




公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDSM-0.37	09150006104	CDSF-0.37	09150006204
CDSM-0.5	09150006103	CDSF-0.5	09150006203
CDSM-0.75	09150006105	CDSF-0.75	09150006205
CDSM-1.0	09150006102	CDSF-1.0	09150006202
CDSM-1.5	09150006101	CDSF-1.5	09150006201
CDSM-2.5	09150006106	CDSF-2.5	09150006206

镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDGM-0.37	09150006124	CDGF-0.37	09150006224
CDGM-0.5	09150006123	CDGF-0.5	09150006223
CDGM-0.75	09150006125	CDGF-0.75	09150006225
CDGM-1.0	09150006122	CDGF-1.0	09150006222
CDGM-1.5	09150006121	CDGF-1.5	09150006221
CDGM-2.5	09150006126	CDGF-2.5	09150006226



线规 Wire gauge	Φ	剥线长度 Stripping length
0.14-0.37 mm ²	AWG 26-22	0.9 8 mm
0.5 mm ²	AWG 20	1.1 8 mm
0.75 mm ²	AWG 18	1.3 8 mm
1 mm ²	AWG 18	1.45 8 mm
1.5 mm ²	AWG 16	1.75 8 mm
2.5 mm ²	AWG 14	2.25 6 mm

工具 Tools

冷压钳 Crimping tool



压接线径 Wire gauge	型号 Type	订货号 Part Number
0.14-4mm ²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
10A 冷压针 10A Crimp contacts	TL00	09990000012

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02

HDD-042 超高密度型插芯 Ultra-high Density Inserts 250V 10A 42+ ⊕

插芯 Inserts

外壳尺寸：匹配10B外壳，详情请参考16-01~16-13页

Hoods/Housings：Matching 10B Hood Housing，detail on P16-01~P16-13


冷压连接 Crimp terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HDD-042-MC	09160423001
母 Female	HDD-042-FC	09160423101


1) 接插体之间的最大距离21mm

1) Distance for contact max.21mm




接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for inserts for use without Hoods/housings



附件 Accessories

10A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 3m\Omega$
镀银 Silver plated




公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDSM-0.37	09150006104	CDSF-0.37	09150006204
CDSM-0.5	09150006103	CDSF-0.5	09150006203
CDSM-0.75	09150006105	CDSF-0.75	09150006205
CDSM-1.0	09150006102	CDSF-1.0	09150006202
CDSM-1.5	09150006101	CDSF-1.5	09150006201
CDSM-2.5	09150006106	CDSF-2.5	09150006206

镀金 Gold plated



CDGM-0.37	09150006124	CDGF-0.37	09150006224
CDGM-0.5	09150006123	CDGF-0.5	09150006223
CDGM-0.75	09150006125	CDGF-0.75	09150006225
CDGM-1.0	09150006122	CDGF-1.0	09150006222
CDGM-1.5	09150006121	CDGF-1.5	09150006221
CDGM-2.5	09150006126	CDGF-2.5	09150006226



线规 Wire gauge	Φ	剥线长度 Stripping length
0.14~0.37 mm ²	AWG 26~22	0.9 8 mm
0.5 mm ²	AWG 20	1.1 8 mm
0.75 mm ²	AWG 18	1.3 8 mm
1 mm ²	AWG 18	1.45 8 mm
1.5 mm ²	AWG 16	1.75 8 mm
2.5 mm ²	AWG 14	2.25 6 mm

工具 Tools

冷压钳 Crimping tool



压接线径 Wire gauge	型号 Type	订货号 Part Number
0.14~4mm ²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
10A 冷压针 10A Crimp contacts	TL00	09990000012

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02

HDD-072 超高密度型插芯 Ultra-high Density Inserts 250V 10A 72+

插芯 Inserts

外壳尺寸：匹配16B外壳，详情请参考17-01~17-21页


Hoods/Housings：Matching 16B Hood Housing，detail on P17-01~17-21

冷压连接 Crimp terminal




插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HDD-072-MC	09160723001
母 Female	HDD-072-FC	09160723101

1) 接插体之间的最大距离21mm
1) Distance for contact max.21mm




接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for inserts for use without Hoods/housings



附件 Accessories

10A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 3\text{m}\Omega$
镀银 Silver plated




公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDSM-0.37	09150006104	CDSF-0.37	09150006204
CDSM-0.5	09150006103	CDSF-0.5	09150006203
CDSM-0.75	09150006105	CDSF-0.75	09150006205
CDSM-1.0	09150006102	CDSF-1.0	09150006202
CDSM-1.5	09150006101	CDSF-1.5	09150006201
CDSM-2.5	09150006106	CDSF-2.5	09150006206

镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDGM-0.37	09150006124	CDGF-0.37	09150006224
CDGM-0.5	09150006123	CDGF-0.5	09150006223
CDGM-0.75	09150006125	CDGF-0.75	09150006225
CDGM-1.0	09150006122	CDGF-1.0	09150006222
CDGM-1.5	09150006121	CDGF-1.5	09150006221
CDGM-2.5	09150006126	CDGF-2.5	09150006226



线规 Wire gauge	Φ	剥线长度 Stripping length
0.14-0.37 mm²	AWG 26-22	0.9 8 mm
0.5 mm²	AWG 20	1.1 8 mm
0.75 mm²	AWG 18	1.3 8 mm
1 mm²	AWG 18	1.45 8 mm
1.5 mm²	AWG 16	1.75 8 mm
2.5 mm²	AWG 14	2.25 6 mm

工具 Tools

冷压钳 Crimping tool



压接线经 Wire gauge	型号 Type	订货号 Part Number
0.14-4mm²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
10A 冷压针 10A Crimp contacts	TL00	09990000012

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02



HDD-108 超高密度型插芯 Ultra-high Density Inserts 250V 10A 108+

插芯 Inserts


外壳尺寸：匹配24B外壳，详情请参考18-01~18-22页
Hoods/Housings : Matching 24B Hood Housing , detail on P18-01~18-22

冷压连接 Crimp terminal




插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HDD-108-MC	09161083001
母 Female	HDD-108-FC	09161083101


1) 接插体之间的最大距离24mm
1) Distance for contact max.24mm

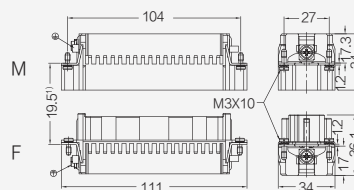

接插针排序
Contacts arrangement view from termination side



面板安装开孔图
Panel cut out for inserts for use without Hoods/housings



附件 Accessories

10A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 3\text{m}\Omega$
镀银 Silver plated




公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDSM-0.37	09150006104	CDSF-0.37	09150006204
CDSM-0.5	09150006103	CDSF-0.5	09150006203
CDSM-0.75	09150006105	CDSF-0.75	09150006205
CDSM-1.0	09150006102	CDSF-1.0	09150006202
CDSM-1.5	09150006101	CDSF-1.5	09150006201
CDSM-2.5	09150006106	CDSF-2.5	09150006206

镀金 Gold plated



CDGM-0.37	09150006124	CDGF-0.37	09150006224
CDGM-0.5	09150006123	CDGF-0.5	09150006223
CDGM-0.75	09150006125	CDGF-0.75	09150006225
CDGM-1.0	09150006122	CDGF-1.0	09150006222
CDGM-1.5	09150006121	CDGF-1.5	09150006221
CDGM-2.5	09150006126	CDGF-2.5	09150006226



线规 Wire gauge	Φ	剥线长度 Stripping length
0.14~0.37 mm ²	AWG 26-22	0.9 8 mm
0.5 mm ²	AWG 20	1.1 8 mm
0.75 mm ²	AWG 18	1.3 8 mm
1 mm ²	AWG 18	1.45 8 mm
1.5 mm ²	AWG 16	1.75 8 mm
2.5 mm ²	AWG 14	2.25 6 mm

工具 Tools

冷压钳 Crimping tool



压接线径 Wire gauge	型号 Type	订货号 Part Number
0.14~4mm ²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
10A 冷压针 10A Crimp contacts	TL00	09990000012

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02



HDD-144 超高密度型插芯 Ultra-high Density Inserts 250V 10A 144+

插芯 Inserts

外壳尺寸：匹配32B外壳，详情请参考19-01~19-04页

Hoods/Housings：Matching 32B Hood Housing，detail on P19-01~19-04


冷压连接 Crimp terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HDD-072-MC(1-72)	09160723001
	HDD-072-MC(73-144)	09160723011
母 Female	HDD-072-FC(1-72)	09160723101
	HDD-072-FC(73-144)	09160723111


1) 接插体之间的最大距离21mm

1) Distance for contact max.21mm

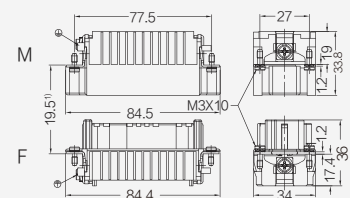

接插针排序

Contacts arrangement view from termination side




M

F

面板安装开孔图

Panel cut out for inserts for use without Hoods/housings



附件 Accessories

10A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 3\text{m}\Omega$
镀银 Silver plated




公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDSM-0.37	09150006104	CDSF-0.37	09150006204
CDSM-0.5	09150006103	CDSF-0.5	09150006203
CDSM-0.75	09150006105	CDSF-0.75	09150006205
CDSM-1.0	09150006102	CDSF-1.0	09150006202
CDSM-1.5	09150006101	CDSF-1.5	09150006201
CDSM-2.5	09150006106	CDSF-2.5	09150006206

镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDGM-0.37	09150006124	CDGF-0.37	09150006224
CDGM-0.5	09150006123	CDGF-0.5	09150006223
CDGM-0.75	09150006125	CDGF-0.75	09150006225
CDGM-1.0	09150006122	CDGF-1.0	09150006222
CDGM-1.5	09150006121	CDGF-1.5	09150006221
CDGM-2.5	09150006126	CDGF-2.5	09150006226



M

F

线规 Wire gauge	Φ	剥线长度 Stripping length
0.14-0.37 mm ² AWG 26-22	0.9	8 mm
0.5 mm ² AWG 20	1.1	8 mm
0.75 mm ² AWG 18	1.3	8 mm
1 mm ² AWG 18	1.45	8 mm
1.5 mm ² AWG 16	1.75	8 mm
2.5 mm ² AWG 14	2.25	6 mm

工具 Tools

冷压钳 Crimping tool



压接线经 Wire gauge	型号 Type	订货号 Part Number
0.14-4mm ²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
10A 冷压针 10A Crimp contacts	TL00	09990000012

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02



HDD-216 超高密度型插芯 Ultra-high Density Inserts 250V 10A 108+

插芯 Inserts


外壳尺寸：匹配48B外壳，详情请参考20-01~20-02页
Hoods/Housings : Matching 48B Hood Housing , detail on P20-01~20-02

冷压连接 Crimp terminal




插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HDD-108-MC(1-108)	09161083001
	HDD-108-MC(109-216)	09161083011
母 Female	HDD-108-FC(1-108)	09161083101
	HDD-108-FC(109-216)	09161083111


1) 接插体之间的最大距离21mm
1) Distance for contact max.21mm

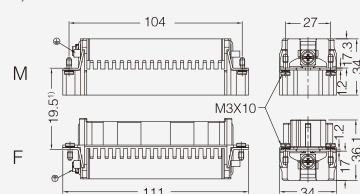

接插针排序
Contacts arrangement view from termination side



面板安装开孔图
Panel cut out for inserts for use without Hoods/housings



附件 Accessories

10A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 3m\Omega$
镀银 Silver plated




公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDSM-0.37	09150006104	CDSF-0.37	09150006204
CDSM-0.5	09150006103	CDSF-0.5	09150006203
CDSM-0.75	09150006105	CDSF-0.75	09150006205
CDSM-1.0	09150006102	CDSF-1.0	09150006202
CDSM-1.5	09150006101	CDSF-1.5	09150006201
CDSM-2.5	09150006106	CDSF-2.5	09150006206

镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDGM-0.37	09150006124	CDGF-0.37	09150006224
CDGM-0.5	09150006123	CDGF-0.5	09150006223
CDGM-0.75	09150006125	CDGF-0.75	09150006225
CDGM-1.0	09150006122	CDGF-1.0	09150006222
CDGM-1.5	09150006121	CDGF-1.5	09150006221
CDGM-2.5	09150006126	CDGF-2.5	09150006226



线规 Wire gauge	Φ	剥线长度 Stripping length
0.14-0.37 mm ²	AWG 26-22	0.9 8 mm
0.5 mm ²	AWG 20	1.1 8 mm
0.75 mm ²	AWG 18	1.3 8 mm
1 mm ²	AWG 18	1.45 8 mm
1.5 mm ²	AWG 16	1.75 8 mm
2.5 mm ²	AWG 14	2.25 6 mm

工具 Tools

冷压钳 Crimping tool



压接线径 Wire gauge	型号 Type	订货号 Part Number
0.14-4mm ²	TL02G	09990000021

退针器 Removal tool



适用类型 For	型号 Type	订货号 Part Number
10A 冷压针 10A Crimp contacts	TL00	09990000012

更多工具请参考 25-01~25-02页 More tools on P25-01~P25-02

HSB 系列 / HSB SERIES

35A大电流型连接器 / 35A heavy-current connector





HSB 系列 / HSB SERIES

技术参数 Technical Characteristics


规范	Specifications	
规范	Specifications	DIN EN 60 664
		DIN EN 61 984
插芯	Inserts	
依据 EN 61 984的额定电压	Electrical data acc. to EN 61 984	
接插件针数	Number Of Contacts	4,6,12+PE
额定电流	Rated Current	35A
相对地额定电压	Rated Voltage	400V
相间额定电压		690V
额定脉冲电压	Rated Impulse Voltage	6kV
污染程度	Pollution Degree	3
或	Or	35A 500V 6kV 3
依据UL/CSA额定电压	Rated Voltage Acc.to UI CSA	600V
绝缘电阻	Insulation Resistance	$\geq 10^{10} \Omega$
材料	Material	聚碳酸酯 Polycarbonate
工作温度范围	Limiting Temperatures	-40°C...+125°C
依据UL94阻燃等级	Flammability Acc. To UL94	V0
可拔插次数	Mechanical Working Life-mating Cycles	≥ 500
插针	Contacts	
材料	Material	铜合金 Copper Alloy
表面处理	Surface	镀银 Hard-silver Plated
接触电阻	Contact Resistance	$\leq 1m\Omega$
螺钉连接	Screw Terminal	
导线规格	Wire Gauge	1.5-6mm ²
AWG	AWG	10
拧紧力矩	Tightening Torque	1.2Nm

电流负载能力 Current Carrying Capacity

电流负载能力所受的限制主要来自包含接插针的接插体可承受的最大温度

The current carrying is limited by maximum temperature of materials for Inserts and contacts including terminals.

测试和控制过程依据 Measuring and testing techniques according to DIN EN 60512-5

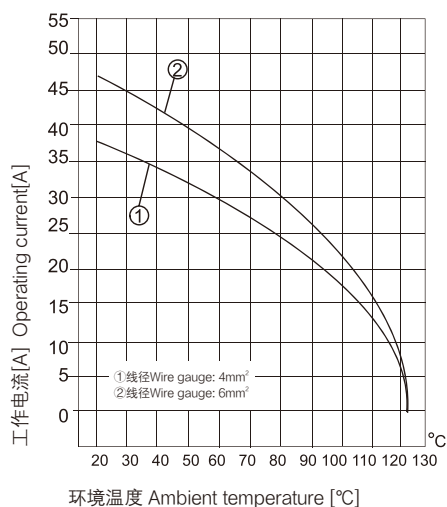



HSBS-004 大电流型插芯 Heavy-current Inserts 400V/690V 35A 4+

插芯 Inserts


外壳尺寸：匹配68外壳，详情请参考15-01-15-10页
Hoods/Housings：Matching 68 Hood Housing , detail on P15-01-15-10

螺丝连接 Screw terminal




插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HSBS-004-M	09410042601
母 Female	HSBS-004-F	09410042701


1) 接插体之间的最大距离21mm
1) Distance for contact max.21mm



接插针排序
Contacts arrangement view from termination side



面板安装开孔图
Panel cut out for inserts for use without Hoods/housings



HSB-004 大电流型插芯 Heavy-current Inserts 400V/690V 35A+

插芯 Inserts

外壳尺寸：匹配10B外壳，详情请参考16-01~16-13页
Hoods/Housings : Matching 10B Hood Housing , detail on P16-01~16-13


螺丝连接 Screw terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HSB-004-M	09310042601
母 Female	HSB-004-F	09310042701


1) 接插体之间的最大距离21mm

1) Distance for contact max.21mm




接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for inserts for use without Hoods/housings



HSB-006 大电流型插芯 Heavy-current Inserts 400V/690V 35A 6+

插芯 Inserts

外壳尺寸：匹配16B外壳，详情请参考17-01~17-21页

Hoods/Housings：Matching 16B Hood Housing，detail on P17-01~17-21


螺丝连接 Screw terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HSB-006-M	09310062601
母 Female	HSB-006-F	09310062701


1) 接插体之间的最大距离21mm

1) Distance for contact max.21mm

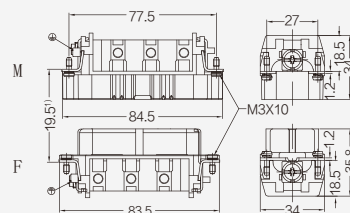


接插针排序

Contacts arrangement view from termination side



面板安装开孔图

Panel cut out for inserts for use without Hoods/housings



HQ 系列 / HQ SERIES

紧凑小体积型插芯 / Compact Series





HQ-002/0 紧凑小体积型插芯 / Compact Series

技术参数 Technical Characteristics


规范	Specifications	
规范	Specifications	DIN EN 60 664
		DIN EN 61 984
插芯	Inserts	
依据 EN 61 984的额定电压	Electrical Data Acc. To EN 61 984	
接插件针数	Number Of Contacts	2+PE
额定电流	Rated Current	40A
额定电压	Rated Voltage	400V
额定脉冲电压	Rated Impulse Voltage	6kV
污染程度	Pollution Degree	3
依据UL/CSA额定电压	Rated Voltage Acc.to UI CSA	400V
绝缘电阻	Insulation Resistance	$\geq 10^{10} \Omega$
材料	Material	聚碳酸酯 Polycarbonate
工作温度范围	Limiting Temperatures	-40°C...+125°C
依据UL94阻燃等级	Flammability Acc. To UL94	V0
可拔插次数	Mechanical Working Life-mating Cycles	≥ 500
插针	Contacts	
材料	Material	铜合金 Copper Alloy
表面处理	Surface	镀银 Hard-Silver Plated
接触电阻	Contact Resistance	$\leq 1m\Omega$
轴向螺栓连接	Axial Screw Termination	
mm ²	mm ²	2.5-10mm ²
AWG	AWG	14-8
拧紧力矩	Tightening Torque	1.8Nm
剥线长度	Stripping Length	8mm ⁺¹
外壳	Hoods/housings	
塑料外壳	Plastic Hoods/housings	
-材料	-material	聚碳酸酯 Polycarbonate
-依据UL94的阻燃等级	-flammability Acc. To UL 94	V0
-联锁状态下依据DIN EN60 529的防护等级	-degree Of Protection Acc. To DIN EN60 529 For Coupled Connector	IP67
金属外壳	Hoods/housings, Metal	
-材料	-material	锌合金 Zinc Die-cast
-联锁状态下依据DIN EN60 529的防护等级	-degree Of Protection Acc. To DIN EN60 529 For Coupled Connector	IP44
		IP67(实现螺栓密封) is achieved with seal screw


电流负载能力 Current Carrying Capacity

电流负载能力所受的限制主要来自包含接插针的接插体可承受的最大温度

THQ current carrying is limited by maximum temperature of materials for Inserts and contacts including terminals.

测试和控制过程依据 Measuring and testing techniques according to DIN EN 60512-5

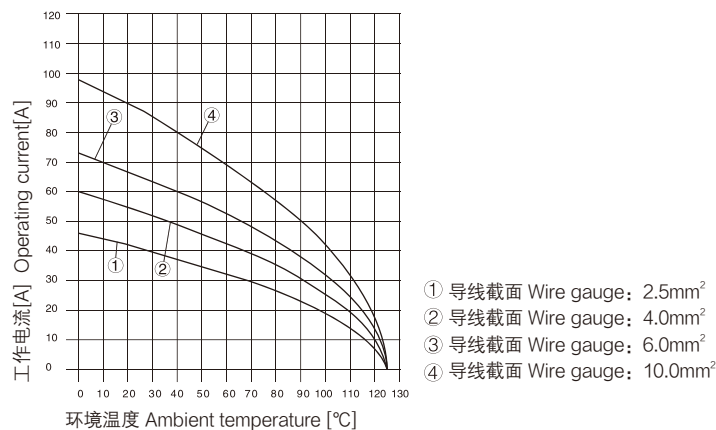



HQ-002/0 紧凑小体积型插芯 Compact Series 400V 40A 2+⊕

插芯 Inserts


外壳尺寸：匹配3A外壳,详情请参考11-05~11-11页

Hoods/Housings : size 3A,detail please find the page P11-05~P11-11

轴向螺栓连接 Axial Screw Terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HQ-002.1-M(2.5-6.0mm ²)	09120022653
	HQ-002.2-M(4-10mm ²)	09120022651
母 Female	HQ-002.1-F(2.5-6.0mm ²)	09120022753
	HQ-002.2-F(4-10mm ²)	09120022751



附件 Accessories

工具 Tools

内六角扳手
Hexagonal driver




描述 Description	型号 Type	订货号 Part Number
用于轴向夹紧螺栓 带T型把手 For Axial Setscrew With Grip	SW-2x40	09990000363

编码元件 Coding Element



描述 Description	型号 Type	订货号 Part Number
编码、防呆 Coding、Pokayoke	CODE-Q2	09120009922





HQV-002/0 紧凑小体积型插芯 / Compact Series

技术参数 Technical Characteristics


规范	Specifications	
规范	Specifications	DIN EN 60 664
		DIN EN 61 984
插芯	Inserts	
依据 EN 61 984的额定电压	Electrical Data Acc. To EN 61 984	
接插件针数	Number Of Contacts	2+PE
额定电流	Rated Current	40A
额定电压	Rated Voltage	830V
额定脉冲电压	Rated Impulse Voltage	6kV
污染程度	Pollution Degree	3
依据UL/CSA额定电压	Rated Voltage Acc.to UI CSA	600V
绝缘电阻	Insulation Resistance	$\geq 10^{10} \Omega$
材料	Material	聚碳酸酯 Polycarbonate
工作温度范围	Limiting Temperatures	-40°C...+125°C
依据UL94阻燃等级	Flammability Acc. To UL94	V0
可拔插次数	MechQnical Working Life-mating Cycles	≥ 500
插针	Contacts	
材料	Material	铜合金 Copper Alloy
表面处理	Surface	镀银 Hard-Silver Plated
接触电阻	Contact Resistance	$\leq 1m\Omega$
轴向螺栓连接	Axial Screw Termination	
mm ²	mm ²	2.5-10mm ²
AWG	AWG	14-8
拧紧力矩	Tightening Torque	1.8Nm
剥线长度	Stripping Length	8mm ⁺¹
外壳	Hoods/housings	
塑料外壳	Plastic Hoods/housings	
-材料	-material	聚碳酸酯 Polycarbonate
-依据UL94的阻燃等级	-flammability Acc. To UL 94	V0
-连锁状态下依据DIN EN60 529的防护等级	-degree Of Protection Acc. To DIN EN60 529 For Coupled Connector	IP67
金属外壳	Hoods/housings, Metal	
-材料	-material	锌合金 Zinc Die-cast
-连锁状态下依据DIN EN60 529的防护等级	-degree Of Protection Acc. To DIN EN60 529 For Coupled Connector	IP44
		IP67(实现螺栓密封) is achieved with seal screw


电流负载能力 Current Carrying Capacity

电流负载能力所受的限制主要来自包含接插针的接插体可承受的最大温度

THQ current carrying is limited by maximum temperature of materials for Inserts and contacts including terminals.

测试和控制过程依据 Measuring and testing techniques according to DIN EN 60512-5

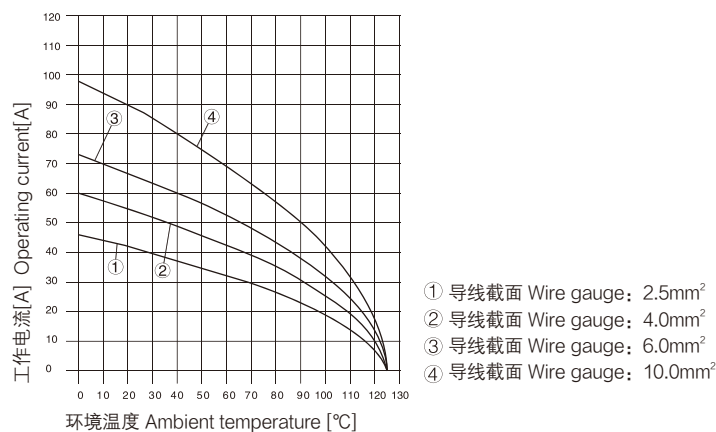



HQV-002/0 紧凑小体积型插芯 Compact Series 830V 40A 2+⚡

插芯 Inserts


外壳尺寸：匹配3A外壳,详情请参考11-05~11-11页

Hoods/Housings : size 3A,detail please find the page P11-05~P11-11

轴向螺栓连接 Axial Screw Terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HQV-002.1-M(2.5-6.0mm ²)	09120022654
	HQV-002.2-M(4-10mm ²)	09120022652
母 Female	HQV-002.1-F(2.5-6.0mm ²)	09120022754
	HQV-002.2-F(4-10mm ²)	09120022752



附件 Accessories

工具 Tools

内六角扳手
Hexagonal driver




描述 Description	型号 Type	订货号 Part Number
用于轴向夹紧螺栓 带T型把手 For Axial Setscrew With Grip	SW-2x40	09990000363

编码元件 Coding Element



描述 Description	型号 Type	订货号 Part Number
编码、防呆 Coding、Pokayoke	CODE-Q2	09120009922





HQ-005/0 紧凑小体积型插芯 / Compact Series

技术参数 Technical Characteristics


规范	Specifications	
规范	Specifications	DIN EN 60 664
		DIN EN 61 984
插芯	Inserts	
依据 EN 61 984的额定电压	Electrical Data Acc. To EN 61 984	
接插件针数	Number Of Contacts	5+PE
额定电流	Rated Current	16A
相对地额定电压	Rated voltage conductor-ground	230V
相间额定电压	Rated voltage conductor-conductor	400V
额定脉冲电压	Rated Impulse Voltage	4kV
污染程度	Pollution Degree	3
当污染等级2时的参数	Pollution Degree 2 Also	16A 320/500V 4kV 2
依据UL/CSA额定电压	Rated Voltage Acc.to UI CSA	600V
绝缘电阻	Insulation Resistance	$\geq 10^{10} \Omega$
材料	Material	聚碳酸酯 Polycarbonate
工作温度范围	Limiting Temperatures	-40°C...+125°C
依据UL94阻燃等级	Flammability Acc. To UL94	V0
可拔插次数	Mechanical Working Life-mating Cycles	≥ 500
插针	Contacts	
材料	Material	铜合金 Copper Alloy
表面处理	Surface	镀银 Hard-Silver Plated
		镀金 Hard-gold Plated
接触电阻	Contact Resistance	$\leq 1m\Omega$
冷压连接	Crimp Terminal	
-mm ²	-mm ²	0.14-2.5mm ²
-AWG	-AWG	26-14
PE螺钉连接	PE Screw Terminal	
-mm ²	-mm ²	2.5mm ²
-AWG	-AWG	14
外壳	Hoods/housings	
塑料外壳	Plastic Hoods/housings	
-材料	-material	聚碳酸酯 Polycarbonate
-依据UL94的阻燃等级	-flammability Acc. To UL 94	V0
-连锁状态下依据DIN EN60 529的防护等级	-degree Of Protection Acc. To DIN EN60 529 For Coupled Connector	IP67
金属外壳	Hoods/housings, Metal	
-材料	-material	锌合金 Zinc Die-cast
-连锁状态下依据DIN EN60 529的防护等级	-degree Of Protection Acc. To DIN EN60 529 For Coupled Connector	IP44
		IP67(实现螺栓密封) is achieved with seal screw

电流负载能力 Current Carrying Capacity

电流负载能力所受的限制主要来自包含接插针的接插体可承受的最大温度

THQ current carrying is limited by maximum temperature of materials for Inserts and contacts including terminals.

测试和控制过程依据 Measuring and testing techniques according to DIN EN 60512-5

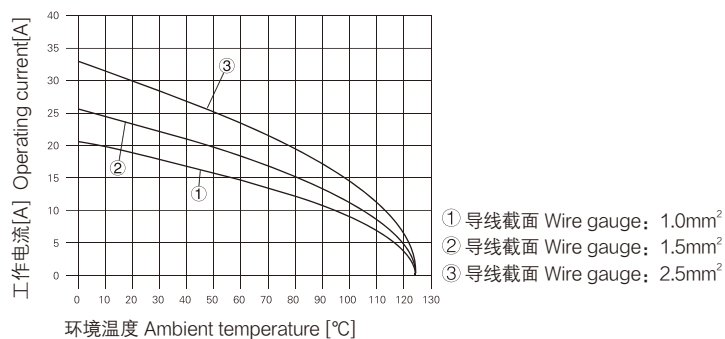



HQ-005/0 紧凑小体积型插芯 Compact Series 230/400V 16A 5+⊕

插芯 Inserts


外壳尺寸：匹配3A外壳,详情请参考11-05~11-11页

Hoods/Housings : size 3A,detail please find the page P11-05~P11-11

冷压连接 Crimp terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HQ-005/0-MC	09120053001
母 Female	HQ-005/0-FC	09120053101




附件 Accessories

16A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 1\text{m}\Omega$
镀银 Silver plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CESM-0.37	09330006127	CESF-0.37	09330006227
CESM-0.5	09330006121	CESF-0.5	09330006220
CESM-0.75	09330006114	CESF-0.75	09330006214
CESM-1.0	09330006105	CESF-1.0	09330006205
CESM-1.5	09330006104	CESF-1.5	09330006204
CESM-2.5	09330006102	CESF-2.5	09330006202



镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CEGM-0.37	09330006117	CEGF-0.37	09330006217
CEGM-0.5	09330006122	CEGF-0.5	09330006222
CEGM-0.75	09330006115	CEGF-0.75	09330006215
CEGM-1.0	09330006118	CEGF-1.0	09330006218
CEGM-1.5	09330006116	CEGF-1.5	09330006216
CEGM-2.5	09330006123	CEGF-2.5	09330006223


标示 Identification	线规 Wire gauge	剥线长度 Stripping length
no groove	0.14-0.37mm ²	7.5mm
1 groove	0.5mm ²	7.5mm
1 groove	0.75mm ²	7.5mm
1 groove	1.0mm ²	7.5mm
2 groove	1.5mm ²	7.5mm
3 groove	2.5mm ²	7.5mm

保险延迟针 Relay contact

镀银 Silver plated




线规 Wire gauge(mm ²)	型号 Type	订货号 Part Number
1	CESM-1.0R	09330006109
1.5	CESM-1.5R	09330006110
2.5	CESM-2.5R	09330006111



编码元件 Coding Element



描述 Description	型号 Type	订货号 Part Number
编码、防呆 Coding、Pokayoke	CODE-E	09330009954



工具 Tools

冷压钳
Crimping tool



压接线径 Wire gauge	型号 Type	订货号 Part Number
0.5-4mm ²	TL02G	09990000021
压接线径: 0.14-0.37mm ² 请选择TL02冷压钳 Wire gauge: 0.14-0.37mm ² please select TL02 Crimping tool		

退针器
Removal tool



适用类型 For	型号 Type	订货号 Part Number
16A 冷压针 Crimp contacts	TL01	09990000059



HQ-007/0 紧凑小体积型插芯 / Compact Series

技术参数 Technical Characteristics


规范	Specifications	
规范	Specifications	DIN EN 60 664
		DIN EN 61 984
插芯	Inserts	
依据 EN 61 984的额定电压	Electrical Data Acc. To EN 61 984	
接插件针数	Number Of Contacts	7+PE
额定电流	Rated Current	10A
额定电压	Rated Voltage	400V
额定脉冲电压	Rated Impulse Voltage	6kV
污染程度	Pollution Degree	3
当污染等级2时的参数	Pollution Degree 2 Also	10A 400/690V 6kV 2
依据UL/CSA额定电压	Rated Voltage Acc.to UI CSA	600V
绝缘电阻	Insulation Resistance	$\geq 10^{10}\Omega$
材料	Material	聚碳酸酯 Polycarbonate
工作温度范围	Limiting Temperatures	-40°C...+125°C
依据UL94阻燃等级	Flammability Acc. To UL94	V0
可接插次数	Mechanical Working Life-mating Cycles	≥ 500
插针	Contacts	
材料	Material	铜合金 Copper Alloy
表面处理	Surface	镀银 Hard-Silver Plated
		镀金 Hard-Gold Plated
接触电阻	Contact Resistance	$\leq 3m\Omega$
冷压连接	Crimp Terminal	
-mm ²	-mm ²	0.14-2.5mm ²
-AWG	-AWG	26-14
PE螺钉连接	PE Screw Terminal	
-mm ²	-mm ²	2.5mm ²
-AWG	-AWG	14
外壳	Hoods/housings	
塑料外壳	Plastic Hoods/housings	
-材料	-material	聚碳酸酯 Polycarbonate
-依据UL94的阻燃等级	-flammability Acc. To UL 94	V0
-联锁状态下依据DIN EN60 529的防护等级	-degree Of Protection Acc. To DIN EN60 529 For Coupled Connector	IP67
金属外壳	Hoods/housings, Metal	
-材料	-material	锌合金 Zinc Die-cast
-联锁状态下依据DIN EN60 529的防护等级	-degree Of Protection Acc. To DIN EN60 529 For Coupled Connector	IP44
		IP67(实现螺栓密封) is achieved with seal screw

电流负载能力 Current Carrying Capacity

电流负载能力所受的限制主要来自包含接插针的接插体可承受的最大温度

THQ current carrying is limited by maximum temperature of materials for Inserts and contacts including terminals.

测试和控制过程依据 Measuring and testing techniques according to DIN EN 60512-5

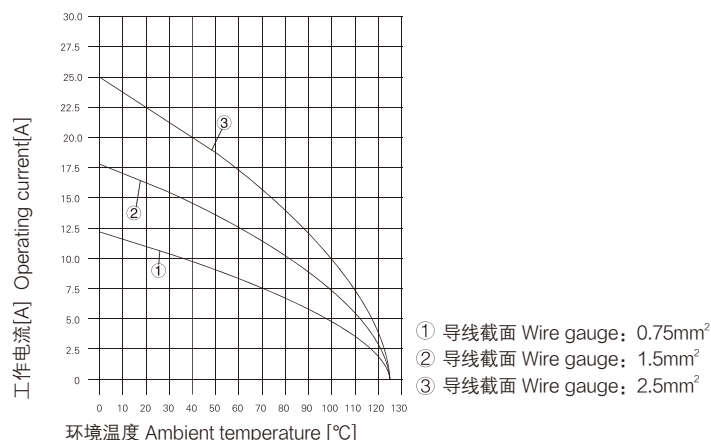



HQ-007/0 紧凑小体积型插芯 Compact Series 400V 10A 7+⊕

插芯 Inserts


外壳尺寸：匹配3A外壳,详情请参考11-05~11-11页

Hoods/Housings：size 3A,detail please find the page P11-05~P11-11

冷压连接 Crimp terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HQ-007/0-MC	09120073001
母 Female	HQ-007/0-FC	09120073101



附件 Accessories

10A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 3\text{m}\Omega$
镀银 Silver plated




镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDSM-0.37	09150006104	CDSF-0.37	09150006204
CDSM-0.5	09150006103	CDSF-0.5	09150006203
CDSM-0.75	09150006105	CDSF-0.75	09150006205
CDSM-1.0	09150006102	CDSF-1.0	09150006202
CDSM-1.5	09150006101	CDSF-1.5	09150006201
CDSM-2.5	09150006106	CDSF-2.5	09150006206

CDGM-0.37	09150006124	CDGF-0.37	09150006224
CDGM-0.5	09150006123	CDGF-0.5	09150006223
CDGM-0.75	09150006125	CDGF-0.75	09150006225
CDGM-1.0	09150006122	CDGF-1.0	09150006222
CDGM-1.5	09150006121	CDGF-1.5	09150006221
CDGM-2.5	09150006126	CDGF-2.5	09150006226




线规 Wire gauge	Φ	剥线长度 Stripping length
0.14-0.37 mm ²	AWG 26-22	0.9
0.5 mm ²	AWG 20	1.1
0.75 mm ²	AWG 18	1.3
1 mm ²	AWG 18	1.45
1.5 mm ²	AWG 16	1.75
2.5 mm ²	AWG 14	2.25

编码元件 Coding Element



描述 Description	类别 Category	型号 Type	订货号 Part Number
编码、防呆	公 Male	CODE-Q7M	09120009901
Coding、Pokayoke	母 Female	CODE-Q7F	09120009902



工具 Tools

冷压钳
Crimping tool



压接线经 Wire gauge	型号 Type	订货号 Part Number
0.14-4mm ²	TL02G	09990000021

退针器
Removal tool



适用类型 For	型号 Type	订货号 Part Number
10A 冷压针 Crimp contacts	TL00	09990000059



HQ-012/0 紧凑小体积型插芯 / Compact Series

技术参数 Technical Characteristics


规范	Specifications	
规范	Specifications	DIN EN 60 664
		DIN EN 61 984
插芯	Inserts	
依据 EN 61 984的额定电压	Electrical Data Acc. To EN 61 984	
接插件针数	Number Of Contacts	12+PE
额定电流	Rated Current	10A
额定电压	Rated Voltage	400V
额定脉冲电压	Rated Impulse Voltage	6kV
污染程度	Pollution Degree	3
当污染等级2时的参数	Pollution Degree 2 Also	10A 400/690V 6kV 2
依据UL/CSA额定电压	Rated Voltage Acc.to UI CSA	600V
绝缘电阻	Insulation Resistance	$\geq 10^{10}\Omega$
材料	Material	聚碳酸酯 Polycarbonate
工作温度范围	Limiting Temperatures	-40°C...+125°C
依据UL94阻燃等级	Flammability Acc. To UL94	V0
可接插次数	Mechanical Working Life-mating Cycles	≥ 500
插针	Contacts	
材料	Material	铜合金 Copper Alloy
表面处理	Surface	镀银 Hard-Silver Plated
		镀金 Hard-Gold Plated
接触电阻	Contact Resistance	$\leq 3m\Omega$
冷压连接	Crimp Terminal	
-mm ²	-mm ²	0.14-2.5mm ²
-AWG	-AWG	26-14
PE螺钉连接	PE Screw Terminal	快速锁定终止 Quick Lock Termination
-mm ²	-mm ²	0.5-2.5mm ²
-AWG	-AWG	20-14
外壳	Hoods/housings	
塑料外壳	Plastic Hoods/housings	
-材料	-material	聚碳酸酯 Polycarbonate
-依据UL94的阻燃等级	-flammability Acc. To UL 94	V0
-联锁状态下依据DIN EN60 529的防护等级	-degree Of Protection Acc. To DIN EN60 529 For Coupled Connector	IP67
金属外壳	Hoods/housings, Metal	
-材料	-material	锌合金 Zinc Die-cast
-联锁状态下依据DIN EN60 529的防护等级	-degree Of Protection Acc. To DIN EN60 529 For Coupled Connector	IP44
		IP67(实现螺栓密封) is achieved with seal screw

电流负载能力 Current Carrying Capacity

电流负载能力所受的限制主要来自包含接插针的接插体可承受的最大温度

THQ current carrying is limited by maximum temperature of materials for Inserts and contacts including terminals.

测试和控制过程依据 Measuring and testing techniques according to DIN EN 60512-5

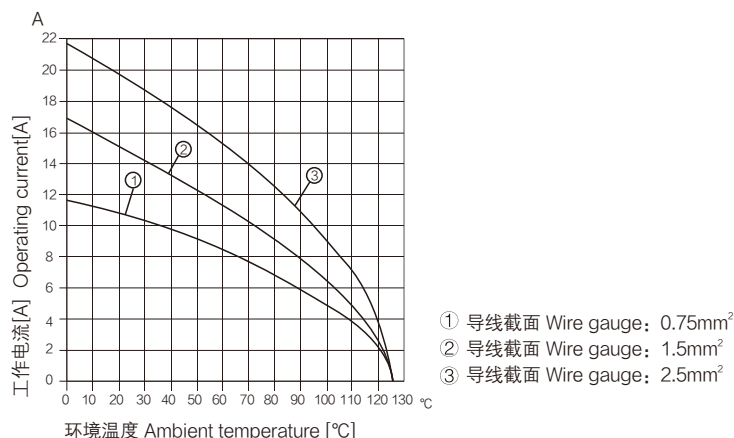

HQ-012/0 紧凑小体积型插芯 Compact Series 400V 10A 12+Ⓢ


插芯 Inserts

外壳尺寸：匹配3A外壳,详情请参考11-05~11-11页
Hoods/Housings : size 3A,detail please find the page P11-05~P11-11

冷压连接 Crimp terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HQ-012/0-MC	09120123001
母 Female	HQ-012/0-FC	09120123101




附件 Accessories

10A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 3m\Omega$
镀银 Silver plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDSM-0.37	09150006104	CDSF-0.37	09150006204
CDSM-0.5	09150006103	CDSF-0.5	09150006203
CDSM-0.75	09150006105	CDSF-0.75	09150006205
CDSM-1.0	09150006102	CDSF-1.0	09150006202
CDSM-1.5	09150006101	CDSF-1.5	09150006201
CDSM-2.5	09150006106	CDSF-2.5	09150006206



镀金 Gold plated




公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDGM-0.37	09150006124	CDGF-0.37	09150006224
CDGM-0.5	09150006123	CDGF-0.5	09150006223
CDGM-0.75	09150006125	CDGF-0.75	09150006225
CDGM-1.0	09150006122	CDGF-1.0	09150006222
CDGM-1.5	09150006121	CDGF-1.5	09150006221
CDGM-2.5	09150006126	CDGF-2.5	09150006226

线规 Wire gauge		Φ	剥线长度 Stripping length
0.14-0.37 mm ²	AWG 26-22	0.9	8 mm
0.5 mm ²	AWG 20	1.1	8 mm
0.75 mm ²	AWG 18	1.3	8 mm
1 mm ²	AWG 18	1.45	8 mm
1.5 mm ²	AWG 16	1.75	8 mm
2.5 mm ²	AWG 14	2.25	6 mm

编码元件 Coding Element



描述 Description	型号 Type	订货号 Part Number
编码、防呆 Coding、Pokayoke	CODE-Q12	09120009924



工具 Tools

冷压钳
Crimping tool



压接线经 Wire gauge	型号 Type	订货号 Part Number
0.14-4mm²	TL02G	09990000021

退针器
Removal tool



适用类型 For	型号 Type	订货号 Part Number
10A 冷压针 Crimp contacts	TL00	09990000059



HQ-008/0 紧凑小体积型插芯 / Compact Series

技术参数 Technical Characteristics


规范	Specifications	
规范	Specifications	DIN EN 60 664
		DIN EN 61 984
插芯	Inserts	
依据 EN 61 984的额定电压	Electrical Data Acc. To EN 61 984	
接插件针数	Number Of Contacts	8+PE
额定电流	Rated Current	16A
额定电压	Rated Voltage	500V
额定脉冲电压	Rated Impulse Voltage	6kV
污染程度	Pollution Degree	3
当污染等级2时的参数	Pollution Degree 2 Also	16A 400/690V 6kV 2
安装金属外壳时	Mounted Metal Hood	16A 230/400V 4kV 3
依据UL/CSA额定电压	Rated Voltage Acc.to UI CSA	600V
绝缘电阻	Insulation Resistance	$\geq 10^{10} \Omega$
材料	Material	聚碳酸酯 Polycarbonate
工作温度范围	Limiting Temperatures	-40°C...+125°C
依据UL94阻燃等级	Flammability Acc. To UL94	V0
可拔插次数	Mechanical Working Life-mating Cycles	≥ 500
插针	Contacts	
材料	Material	铜合金 Copper Alloy
表面处理	Surface	镀银 Hard-Silver Plated
		镀金 Hard-Gold Plated
接触电阻	Contact Resistance	$\leq 1m\Omega$
冷压连接	Crimp Terminal	
-mm ²	-mm ²	0.14-2.5mm ² (部分装备情况下可达到4mm ²)
-AWG	-AWG	26-12
外壳	Hoods/housings	
塑料外壳	Plastic Hoods/housings	
-材料	-material	热塑性塑料 Hermoplastic
-联锁元件	-Locking element	聚酰胺 (尼龙) Polyamide
-外壳密封	-Hoods/Housings seal	丁晴橡胶 NBR
-工作温度范围	-Limiting temperatures	-40°C...+125°C
-依据UL94的阻燃等级	-flammability Acc. To UL 94	V0
-联锁状态下依据DIN EN60 529的防护等级	-degree Of Protection Acc. To DIN EN60 529 For Coupled Connector	IP65
金属外壳	Hoods/housings, Metal	
-材料	-material	金属 Metal
-联锁元件	-Locking element	不锈钢 Stainless Steel
-外壳密封	-Hoods/Housings seal	丁晴橡胶 NBR
-工作温度范围	-Limiting temperatures	-40°C...+125°C
-联锁状态下依据DIN EN60 529的防护等级	-degree Of Protection Acc. To DIN EN60 529 For Coupled Connector	IP65

电流负载能力 Current Carrying Capacity

电流负载能力所受的限制主要来自包含接插针的接插体可承受的最大温度

THQ current carrying is limited by maximum temperature of materials for Inserts and contacts including terminals.

测试和控制过程依据 Measuring and testing techniques according to DIN EN 60512-5

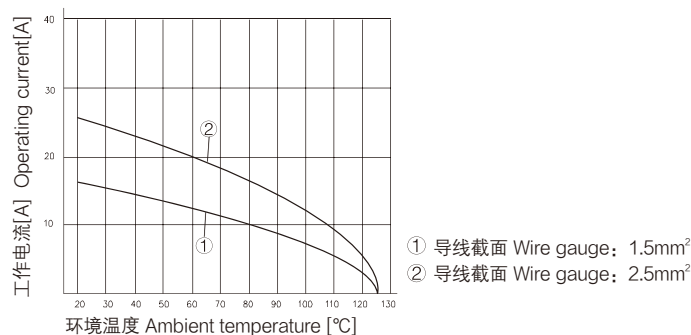



HQ-008/0 紧凑小体积型插芯 Compact Series 500V 16A 8+⊕


插芯 Inserts

外壳尺寸：匹配HC外壳,详情请参考21-01~21-08页
Hoods/Housings : size HC,detail please find the page P21-01~P21-08

冷压连接 Crimp terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HQ-008/0-MC	09120083001
母 Female	HQ-008/0-FC	09120083101

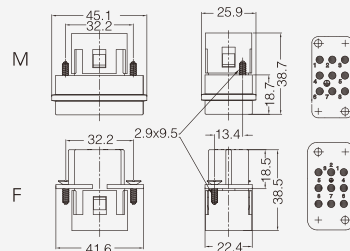

附件 Accessories

16A 冷压针 Crimp contacts


接触电阻 Contact resistance $\leq 1\text{m}\Omega$
镀银 Silver plated



镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CESM-0.37	09330006127	CESF-0.37	09330006227
CESM-0.5	09330006121	CESF-0.5	09330006220
CESM-0.75	09330006114	CESF-0.75	09330006214
CESM-1.0	09330006105	CESF-1.0	09330006205
CESM-1.5	09330006104	CESF-1.5	09330006204
CESM-2.5	09330006102	CESF-2.5	09330006202
CESM-3.0	09330006106	CESF-3.0	09330006206
CESM-4.0	09330006107	CESF-4.0	09330006207
CEGM-0.37	09330006117	CEGF-0.37	09330006217
CEGM-0.5	09330006122	CEGF-0.5	09330006222
CEGM-0.75	09330006115	CEGF-0.75	09330006215
CEGM-1.0	09330006118	CEGF-1.0	09330006218
CEGM-1.5	09330006116	CEGF-1.5	09330006216
CEGM-2.5	09330006123	CEGF-2.5	09330006223
CEGM-4.0	09330006119	CEGF-4.0	09330006221




M		F	
标示 Identification	线规 Wire gauge		剥线长度 Stripping length
no groove	014-0.37mm ²	AWG 26-22	7.5mm
no groove	0.5mm ²	AWG 20	7.5mm
1 groove	0.75mm ²	AWG 18	7.5mm
1 groove	1mm ²	AWG 18	7.5mm
2 groove	1.5mm ²	AWG 16	7.5mm
3 groove	2.5mm ²	AWG 14	7.5mm
wide groove	3mm ²	AWG 12	7.5mm
no groove	4mm ²	AWG 12	7.5mm

保险延迟针 Relay contact

镀银 Silver plated




线规 Wire gauge(mm ²)	型号 Type	订货号 Part Number
1	CESM-1.0R	09330006109
1.5	CESM-1.5R	09330006110
2.5	CESM-2.5R	09330006111



编码元件 Coding Element



描述 Description	型号 Type	订货号 Part Number
编码、防呆 Coding、Pokayoke	CODE-E	09330009954



工具 Tools

冷压钳
Crimping tool



压接线径 Wire gauge	型号 Type	订货号 Part Number
0.5-4mm ²	TL02G	09990000021
压接线径: 0.14-0.37mm ² 请选择TL02冷压钳 Wire gauge: 0.14-0.37mm ² please select TL02 Crimping tool		

退针器
Removal tool



适用类型 For	型号 Type	订货号 Part Number
16A 冷压针 Crimp contacts	TL01	09990000059



HQ-017 紧凑小体积型插芯 / Compact Series

技术参数 Technical Characteristics


规范	Specifications	
规范	Specifications	DIN EN 60 664
		DIN EN 61 984
插芯	Inserts	
依据 EN 61 984的额定电压	Electrical Data Acc. To EN 61 984	
接插件针数	Number Of Contacts	17+PE
额定电流	Rated Current	10A
额定电压	Rated Voltage	250V
额定脉冲电压	Rated Impulse Voltage	4kV
污染程度	Pollution Degree	2
依据UL/CSA额定电压	Rated Voltage Acc.to UI CSA	250V
绝缘电阻	Insulation Resistance	$\geq 10^{10} \Omega$
材料	Material	聚碳酸酯 Polycarbonate
工作温度范围	Limiting Temperatures	-40°C...+125°C
依据UL94阻燃等级	Flammability Acc. To UL94	V0
可拔插次数	Mechanical Working Life-mating Cycles	≥ 500
插针	Contacts	
材料	Material	铜合金 Copper Alloy
表面处理	Surface	镀银 Hard-Silver Plated
		镀金 Hard-Gold Plated
接触电阻	Contact Resistance	$\leq 3m\Omega$
冷压连接	Crimp Terminal	
-mm ²	-mm ²	0.14-2.5mm ²
-AWG	-AWG	26-14
外壳	Hoods/housings	
塑料外壳	Plastic Hoods/housings	
-材料	-material	热塑性塑料 Hermoplastic
-联锁元件	-Locking element	聚酰胺 (尼龙) Polyamide
-外壳密封	-Hoods/Housings seal	丁晴橡胶 NBR
-工作温度范围	-Limiting temperatures	-40°C...+125°C
-依据UL94的阻燃等级	-flammability Acc. To UL 94	V0
-联锁状态下依据DIN EN60 529的防护等级	-degree Of Protection Acc. To DIN EN60 529 For Coupled Connector	IP65
金属外壳	Hoods/housings, Metal	
-材料	-material	金属 Metal
-联锁元件	-Locking element	不锈钢 Stainless Steel
-外壳密封	-Hoods/Housings seal	丁晴橡胶 NBR
-工作温度范围	-Limiting temperatures	-40°C...+125°C
-联锁状态下依据DIN EN60 529的防护等级	-degree Of Protection Acc. To DIN EN60 529 For Coupled Connector	IP65

电流负载能力 Current Carrying Capacity

电流负载能力所受的限制主要来自包含接插针的接插体可承受的最大温度

THQ current carrying is limited by maximum temperature of materials for Inserts and contacts including terminals.

测试和控制过程依据 Measuring and testing techniques according to DIN EN 60512-5

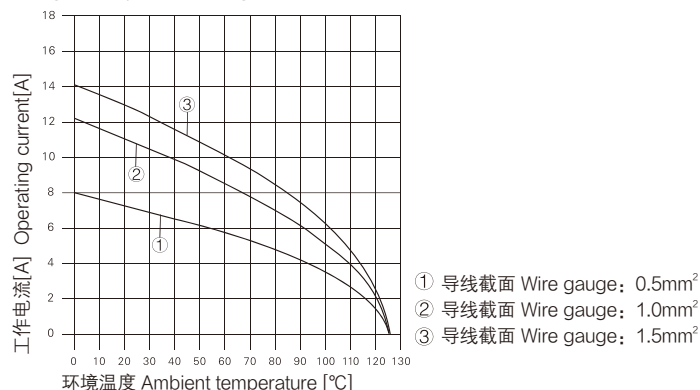

HQ-017 紧凑小体积型插芯 Compact Series 250V 10A 17+⊕


插芯 Inserts

外壳尺寸：匹配HC外壳,详情请参考21-01~21-08页
Hoods/Housings: size HC, detail please find the page P21-01~P21-08

冷压连接 Crimp terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HQ-017-MC	09120173001
母 Female	HQ-017-FC	09120173101




附件 Accessories

10A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 3m\Omega$
镀银 Silver plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDSM-0.37	09150006104	CDSF-0.37	09150006204
CDSM-0.5	09150006103	CDSF-0.5	09150006203
CDSM-0.75	09150006105	CDSF-0.75	09150006205
CDSM-1.0	09150006102	CDSF-1.0	09150006202
CDSM-1.5	09150006101	CDSF-1.5	09150006201
CDSM-2.5	09150006106	CDSF-2.5	09150006206



镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDGM-0.37	09150006124	CDGF-0.37	09150006224
CDGM-0.5	09150006123	CDGF-0.5	09150006223
CDGM-0.75	09150006125	CDGF-0.75	09150006225
CDGM-1.0	09150006122	CDGF-1.0	09150006222
CDGM-1.5	09150006121	CDGF-1.5	09150006221
CDGM-2.5	09150006126	CDGF-2.5	09150006226

线规 Wire gauge		Φ	剥线长度 Stripping length
0.14-0.37 mm ²	AWG 26-22	0.9	8 mm
0.5 mm ²	AWG 20	1.1	8 mm
0.75 mm ²	AWG 18	1.3	8 mm
1 mm ²	AWG 18	1.45	8 mm
1.5 mm ²	AWG 16	1.75	8 mm
2.5 mm ²	AWG 14	2.25	6 mm

工具 Tools

冷压钳
Crimping tool



压接线经 Wire gauge	型号 Type	订货号 Part Number
0.14-4mm ²	TL02G	09990000021

退针器
Removal tool



适用类型 For	型号 Type	订货号 Part Number
10A 冷压针 Crimp contacts	TL00	09990000059



HQ-004/2 紧凑小体积型插芯 / Compact Series

技术参数 Technical Characteristics


规范	Specifications	
规范	Specifications	DIN EN 60 664
		DIN EN 61 984
插芯	Inserts	
依据 EN 61 984的额定电压	Electrical Data Acc. To EN 61 984	
接插件针数	Number Of Contacts	4/2+PE
电力区	Power Side	
额定电流	Rated Current	40A
相对地额定电压	Rated Voltage Conductor-ground	400V
相间额定电压	Rated Voltage Conductor-conductor	690V
额定脉冲电压	Rated Impulse Voltage	6kV
污染程度	Pollution Degree	3
信号区	Signal Side	
额定电流	Rated Current	10A
额定电压	Rated Voltage	250V
额定脉冲电压	Rated Impulse Voltage	4kV
污染程度	Pollution Degree	3
依据UL/CSA额定电压	Rated Voltage Acc.to UI CSA	600/250V
绝缘电阻	Insulation Resistance	$\geq 10^{10} \Omega$
材料	Material	聚碳酸酯 Polycarbonate
工作温度范围	Limiting Temperatures	-40°C...+125°C
依据UL94阻燃等级	Flammability Acc. To UL94	V0
可接插次数	Mechanical Working Life-mating Cycles	≥ 500
插针	Contacts	
材料	Material	铜合金 Copper Alloy
表面处理	Surface	镀银 Hard-Silver Plated
		镀金 Hard-Gold Plated
接触电阻	Contact Resistance	$\leq 0.3m\Omega$
冷压连接	Crimp Terminal	
-mm ²	-mm ²	1.5-6mm ² / 0.14-2.5mm ²
-AWG	-AWG	16-10/26-14
最大绝缘直径	Max. insulation diameter	
-强电针	- Power contacts	5mm
外壳	Hoods/housings	
塑料外壳	Plastic Hoods/housings	
-材料	-material	热塑性塑料 Hermoplastic
-联锁元件	-Locking element	聚酰胺 (尼龙) Polyamide
-外壳密封	-Hoods/Housings seal	丁晴橡胶 NBR
-工作温度范围	-Limiting temperatures	-40°C...+125°C
-依据UL94的阻燃等级	-flammability Acc. To UL 94	V0
-联锁状态下依据DIN	-degree Of Protection Acc. To DIN	
EN60 529的防护等级	EN60 529 For Coupled Connector	IP65


电流负载能力 Current Carrying Capacity

电流负载能力所受的限制主要来自包含接插针的接插体可承受的最大温度

THQ current carrying is limited by maximum temperature of materials for Inserts and contacts including terminals.

测试和控制过程依据 Measuring and testing techniques according to DIN EN 60512-5

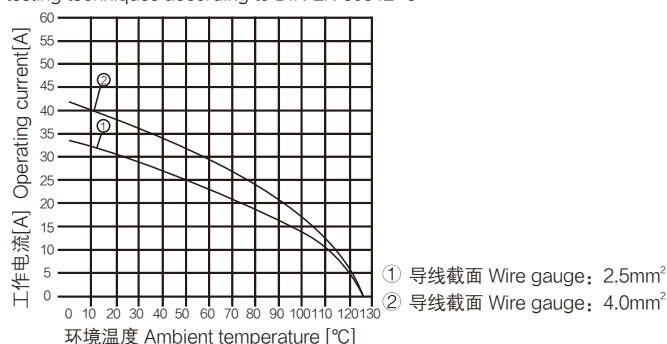



HQ-004/2 紧凑小体积型插芯 Compact Series 400/690V 40/10A 4/2+⊕


插芯 Inserts

外壳尺寸：匹配HC外壳,详情请参考21-01~21-08页
Hoods/Housings: size HC, detail please find the page P21-01~P21-08

冷压连接 Crimp terminal



插芯 Inserts	型号 Type	订货号 Part Number
公 Male	HQ-004/2-MC	09120063041
母 Female	HQ-004/2-FC	09120063141




附件 Accessories

10A 冷压针 Crimp contacts

接触电阻 Contact resistance $\leq 3\text{m}\Omega$
镀银 Silver plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDSM-0.37	09150006104	CDSF-0.37	09150006204
CDSM-0.5	09150006103	CDSF-0.5	09150006203
CDSM-0.75	09150006105	CDSF-0.75	09150006205
CDSM-1.0	09150006102	CDSF-1.0	09150006202
CDSM-1.5	09150006101	CDSF-1.5	09150006201
CDSM-2.5	09150006106	CDSF-2.5	09150006206



镀金 Gold plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CDGM-0.37	09150006124	CDGF-0.37	09150006224
CDGM-0.5	09150006123	CDGF-0.5	09150006223
CDGM-0.75	09150006125	CDGF-0.75	09150006225
CDGM-1.0	09150006122	CDGF-1.0	09150006222
CDGM-1.5	09150006121	CDGF-1.5	09150006221
CDGM-2.5	09150006126	CDGF-2.5	09150006226


线规 Wire gauge	Φ	剥线长度 Stripping length
0.14-0.37 mm ² AWG 26-22	0.9	8 mm
0.5 mm ² AWG 20	1.1	8 mm
0.75 mm ² AWG 18	1.3	8 mm
1 mm ² AWG 18	1.45	8 mm
1.5 mm ² AWG 16	1.75	8 mm
2.5 mm ² AWG 14	2.25	6 mm

40A 冷压针 Crimp contacts

接触电阻 $\leq 0.3\text{m}\Omega$
Contact resistance $\leq 0.3\text{m}\Omega$
镀银 silver plated



公 Male	订货号 Part Number	母 Female	订货号 Part Number
CCSM-1.5	09320006104	CCSF-1.5	09320006204
CCSM-2.5	09320006105	CCSF-2.5	09320006205
CCSM-4.0	09320006107	CCSF-4.0	09320006207
CCSM-6.0	09320006108	CCSF-6.0	09320006208
CCSM-10.0	09320006109	CCSF-10.0	09320006209



导线截面 Wire gauge	Φ	剥线长度 Stripping length
1.5 mm ² AWG 16	1.75	9 mm
2.5 mm ² AWG 14	2.25	9 mm
4 mm ² AWG 12	2.85	9.6 mm

工具 Tools

冷压钳
Crimping tool



压接线经 Wire gauge	型号 Type	订货号 Part Number
0.14-4mm ²	TL02G	09990000021
1.5-6mm ²	TL02-0G	09990000110

退针器
Removal tool



适用类型 For	型号 Type	订货号 Part Number
10A 冷压针 Crimp contacts	TL00	09990000059

适用类型 For	型号 Type	订货号 Part Number
40A 冷压针 Crimp contacts	TL06	09990000305

外壳 / Hood & Housing





外壳部分 / Hoods & Housings Contents

规格Size	页码Page
3A外壳Hoods/Housings	P11-01~P11-11
10A外壳Hoods/Housings	P12-01~P12-02
16A外壳Hoods/Housings	P13-01~P13-02
32A外壳Hoods/Housings	P14-01~P14-02
6B外壳Hoods/Housings	P15-01~P15-10
10B外壳Hoods/Housings	P16-01~P16-13
16B外壳Hoods/Housings	P17-01~P17-21
24B外壳Hoods/Housings	P18-01~P18-22
32B外壳Hoods/Housings	P19-01~P19-06
48B外壳Hoods/Housings	P20-01~P20-02
HC外壳Hoods/Housings	P21-01~P21-08



外壳部分 / Hoods & Housings Contents

3A 塑料外壳 IP65 / Size 3A Plastic Hoods & Housings IP65		
材料	Material	聚碳酸酯 Polycarbonate
颜色	Colour	灰白 Light grey(RAL 7032)
联锁元件	Locking element	
–联锁方式	–Lever type	塑料弹性压合 Lever,plastic
–材料	–Material	聚酰胺 Polyamide
密封元件	Hoods & Housings seal	NBR
适用温度范围	Limiting temperatures	–40...+125°C
阻燃等级	Flammability acc. to UL 94	V0
防护等级(联锁状态,EN60529)	Degree of protection acc.to DIN EN 60 529 for coupled connector	IP65

塑料外壳 IP65 / Plastic Hoods & Housings IP65		
材料	Material	PA+20GF
颜色	Colour	深蓝色 Prussian blue
联锁元件	Locking element	
–联锁方式	–Lever type	塑料弹性压合 Lever,plastic
–材料	–Material	PA+20GF
密封元件	Hoods & Housings seal	NBR
适用温度范围	Limiting temperatures	–40...+125°C
阻燃等级	Flammability acc. to UL 94	V0
防护等级(联锁状态,EN60529)	Degree of protection acc.to DIN EN 60 529 for coupled connector	IP65

3A 金属外壳 IP65 / Size 3A Metal Hoods & Housings IP65		
材料	Material	铸锌 zinc die-cast
颜色	Colour	灰色 Grey
联锁元件	Locking element	
–联锁方式	–Lever type	金属弹性压合 Lever
–材料	–Material	金属(铁)镀锌 metal galvanized/nickel plating
密封元件	Hoods & Housings seal	NBR
适用温度范围	Limiting temperatures	–40...+125°C
阻燃等级	Flammability acc. to UL 94	V0
防护等级(联锁状态,EN60529)	Degree of protection acc.to DIN EN 60 529 for coupled connector	IP65

金属外壳 IP65 / Metal Hoods & Housings IP65		
材料	Material	铸铝合金 Aluminium die-cast,corrosion resistant
颜色	Colour	灰色 Grey
联锁元件	Locking element	
–联锁方式	–Lever type	金属弹性压合 Lever
–材料	–Material	金属(铁)镀锌 metal galvanized/nickel plating
密封元件	Hoods & Housings seal	NBR
适用温度范围	Limiting temperatures	–40...+125°C
阻燃等级	Flammability acc. to UL 94	V0
防护等级(联锁状态,EN60529)	Degree of protection acc.to DIN EN 60 529 for coupled connector	IP65

3A 高防护外壳 IP68 / Size 3A Pressure tight Hoods & Housings IP68		
表面处理	Surface	喷涂/镀铬 Epoxy power paint/Chromated
材料	Material	铸锌 zinc die-cast
颜色	Colour	黑色/灰色 Black or grey
联锁元件	Locking element	
–联锁方式	–Lever type	螺栓连接 Screw locking
–材料	–Material	不锈钢 Stainless steel
密封元件	Hoods & Housings seal	NBR
适用温度范围	Limiting temperatures	–40...+125°C
阻燃等级	Flammability acc. to UL 94	V0
防护等级(联锁状态,EN60529)	Degree of protection acc.to DIN EN 60 529 for coupled connector	IP68



外壳部分 / Hoods & Housings Contents

耐腐蚀(高环境)外壳 IP65 /		
表面处理	Surface	环氧粉末涂料 Epoxy powder
材料	Material	铸铝合金 Aluminium die-cast, corrosion resistant
颜色	Colour	RAL 9005(黑色 Black)
联锁元件	Locking element	
-联锁方式	-Lever type	金属弹性压合 Lever
-材料	-Material	不锈钢 Stainless steel
密封元件	Hoods & Housings seal	NBR
适用温度范围	Limiting temperatures	-40...+125°C
阻燃等级	Flammability acc. to UL 94	V0
防护等级(联锁状态, EN60529)	Degree of protection acc.to DIN EN 60 529 for coupled connector	IP65

EMC电磁兼容外壳 / EMC Electromagnetic Compatibility Hoods & Housings IP65		
材料	Material	铸锌 zinc die-cast
颜色	Colour	
联锁元件	Locking element	
-联锁方式	-Lever type	金属(铁)弹性压合/螺栓连接 Lever/screw locking
-材料	-Material	金属(铁)镀锌 metal galvanized/nickel plating
密封元件	Hoods & Housings seal	NBR
适用温度范围	Limiting temperatures	-40...+125°C
阻燃等级	Flammability acc. to UL 94	V0
防护等级(联锁状态, EN60529)	Degree of protection acc.to DIN EN 60 529 for coupled connector	IP65

高防护外壳 IP68 / Pressure tight Hoods & Housings IP68		
材料	Material	铸铝合金 Aluminium die-cast, corrosion resistant
颜色	Colour	黑色或灰色 Black or grey
联锁元件	Locking element	
-联锁方式	-Lever type	螺栓连接 Screw locking
-材料	-Material	不锈钢 Stainless steel
密封元件	Hoods & Housings seal	NBR
适用温度范围	Limiting temperatures	-40...+125°C
阻燃等级	Flammability acc. to UL 94	V0
防护等级(联锁状态, EN60529)	Degree of protection acc.to DIN EN 60 529 for coupled connector	IP68

HC 金属外壳 IP65 / HC Metal Hoods & Housings IP65		
表面处理	Surface	喷涂/镀铬/镀镍 Epoxy power paint/Chromated/nickeling
材料	Material	铸锌 zinc die-cast
颜色	Colour	黑色/黑色/亚光镍 Black/brushed nickel
联锁元件	Locking element	
-联锁方式	-Lever type	金属弹性压合 Lever
-材料	-Material	不锈钢 Stainless steel
密封元件	Hoods & Housings seal	NBR
适用温度范围	Limiting temperatures	-40...+125°C
阻燃等级	Flammability acc. to UL 94	V0
防护等级(联锁状态, EN60529)	Degree of protection acc.to DIN EN 60 529 for coupled connector	IP65

HC 塑料外壳 IP65 / HCPlastic Hoods & Housings IP65		
材料	Material	聚碳酸酯 Polycarbonate
颜色	Colour	灰白 Light grey(RAL 7032)
联锁元件	Locking element	
-联锁方式	-Lever type	塑料弹性压合 Lever, plastic
-材料	-Material	聚酰胺 Polyamide
密封元件	Hoods & Housings seal	NBR
适用温度范围	Limiting temperatures	-40...+125°C
阻燃等级	Flammability acc. to UL 94	V0
防护等级(联锁状态, EN60529)	Degree of protection acc.to DIN EN 60 529 for coupled connector	IP65


3A 塑料外壳 Plastic Hoods & Housings

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M20	H3A.P-SE-2B-M20	19200030620
PG11	H3A.P-SE-2B-PG11	09200030620



上壳 顶出线 Hoods, top entry




螺纹 Thread	型号 Type	订货号 Part Number
M20	H3A.P-TE-2B-M20	19200030420
PG11	H3A.P-TE-2B-PG11	09200030420



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	H3A.P-BK-1L	09200030320



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	H3A.P-BK-1L-SE	09200030820



封底下壳 Housings, surface mounting




螺纹 Thread	型号 Type	订货号 Part Number
M20	H3A.P-SF-1L-M20	19200030220
PG11	H3A.P-SF-1L-PG11	09200030220



飞线下壳 Housings, cable to cable



螺纹 Thread	型号 Type	订货号 Part Number
M20	H3A.P-CCT-1L-M20	19200030720
PG11	H3A.P-CCT-1L-PG11	09200030720




3A 塑料外壳 Plastic Hoods & Housings

防护等级 Degree of protection : IP65

防护盖 Protection covers




接线方式 Connect way	型号 Type	订货号 Part Number
	H3A-CV-1L/1M (配公芯 for male insert)	09200035442
	H3A-CV-1L/1F (配母芯 for female insert)	09200035441



防护盖 Protection covers



接线方式 Connect way	型号 Type	订货号 Part Number
	H3A-CV-2B/1M (配公芯 for male insert)	09200035448
	H3A-CV-2B/2M (配公芯 for male insert)	09200035446
	H3A-CV-2B/1F (配母芯 for female insert)	09200035447
	H3A-CV-2B/2F (配母芯 for female insert)	09200035445




3A 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M20	H3A-SE-2B-M20	19200031640
PG11	H3A-SE-2B-PG11	09200031640



上壳 顶出线 Hoods, top entry



螺纹 Thread	型号 Type	订货号 Part Number
M20	H3A-TE-2B-M20	19200031440
PG11	H3A-TE-2B-PG11	09200031440
PG13.5	H3A-TE-2B-PG13.5	09200031441




新增M25新品, 详见P11-09 (New M25 products, see P11-09)

不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	H3A-BK-1L	09200030301



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	H3A-BK-1L-MCV/M (配公芯for male insert)	09200030305
---	H3A-BK-1L-MCV/F (配母芯for female insert)	09200030306



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	H3A-BK-1L-SE	09200030801



封底下壳 Housings, surface mounting




螺纹 Thread	型号 Type	订货号 Part Number
M20	H3A-SF-1L-M20	19200031250
PG11	H3A-SF-1L-PG11	09200031250
PG13.5	H3A-SF-1L-PG13.5	09200031251
底部封闭 Bottom closed		
M20	H3A.BC-SF-1L-M20	19200031252
PG11	H3A.BC-SF-1L-PG11	09200031252
PG13.5	H3A.BC-SF-1L-PG13.5	09200031253



飞线下壳 Housings, cable to cable



螺纹 Thread	型号 Type	订货号 Part Number
M20	H3A-CCT-1L-M20	19200031750
PG11	H3A-CCT-1L-PG11	09200031750
PG13.5	H3A-CCT-1L-PG13.5	09200031751




3A 金属外壳(EMC) Metal Hoods & Housings

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M20	EMC.H3A-SE-2B-M20	19620031640
PG11	EMC.H3A-SE-2B-PG11	09620031640



上壳 顶出线 Hoods, top entry




螺纹 Thread	型号 Type	订货号 Part Number
M20	EMC.H3A-TE-2B-M20	19620031440
PG11	EMC.H3A-TE-2B-PG11	09620031440



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	EMC.H3A-BK-1L	09620030301



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	EMC.H3A-BK-1L-MCV/M (配公芯 for male insert)	09620030305
---	EMC.H3A-BK-1L-MCV/F (配母芯 for female insert)	09620030306



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	EMC.H3A-BK-1L-SE	09620030801



封底下壳 Housings, surface mounting




螺纹 Thread	型号 Type	订货号 Part Number
M20	EMC.H3A-SF-1L-M20	19620031250
PG11	EMC.H3A-SF-1L-PG11	09620031250



飞线下壳 Housings, cable to cable



螺纹 Thread	型号 Type	订货号 Part Number
M20	EMC.H3A-CCT-1L-M20	19620031750
PG11	EMC.H3A-CCT-1L-PG11	09620031750




3A 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection : IP65

防护盖 Protection covers




接线方式 Connect way	型号 Type	订货号 Part Number
	H3A-MCV-1L/1M (配公芯 for male insert)	09200035422
	H3A-MCV-1L/1F (配母芯 for female insert)	09200035421



防护盖 Protection covers



接线方式 Connect way	型号 Type	订货号 Part Number
	H3A-MCV-2B/1M (配公芯 for male insert)	09200035426
	H3A-MCV-2B/2M (配公芯 for male insert)	09200035425
	H3A-MCV-2B/1F (配母芯 for female insert)	09200035428
	H3A-MCV-2B/2F (配母芯 for female insert)	09200035427




上壳 顶出线 Hoods, top entry

NEW




螺纹 Thread	型号 Type	订货号 Part Number
M25	H3A-TE-2B-M25	19200031441




3A 高防护外壳 Pressure tight Hoods & Housings

喷涂/镀铬 Epoxy power paint/Chromated 防护等级 Degree of protection: IP68 H version


上壳 顶出线 Hoods, top entry

	螺纹 Thread	型号 Type	订货号 Part Number	
		喷涂 · 螺栓联锁 Epoxy power paint · Screw locking		
	M20	HP3A/H-TE-2S-M20	19407030410	
	PG13.5	HP3A/H-TE-2S-PG13.5	09407030302	
		喷涂 · 轴销联锁 Epoxy power paint · Toggle locking		
	M20	HP3A/H-TE-2T-M20	19407030400	
	PG13.5	HP3A/H-TE-2T-PG13.5	09407030402	
		镀铬 · 螺栓联锁 Chromated · Screw locking		
	M20	C.HP3A/H-TE-2S-M20	19400030410	
	PG13.5	C.HP3A/H-TE-2S-PG13.5	09400030302	
		镀铬 · 轴销联锁 Chromated · Toggle locking		
	M20	C.HP3A/H-TE-2T-M20	19400030400	
	PG13.5	C.HP3A/H-TE-2T-PG13.5	09400030402	


不封底下壳 Housings, bulkhead mounting*

	螺纹 Thread	型号 Type	订货号 Part Number	
		喷涂 · 螺栓联锁 Epoxy power paint · Screw locking		
	---	HP3A/H-BK-2H	09407030311	
		喷涂 · 轴销联锁 Epoxy power paint · Toggle locking		
	---	HP3A/H-BK-2T	09407030301	
		镀铬 · 螺栓联锁 Chromated · Screw locking		
	---	C.HP3A/H-BK-2H	09400030311	
	---	镀铬 · 轴销联锁 Chromated · Toggle locking		
	---	C.HP3A/H-BK-2T	09400030301	


适配器 适用不封底下壳 Adaptor for Housings*

	螺纹 Thread	型号 Type	订货号 Part Number	
		喷涂 Epoxy power paint		
	---	HP3A/H-BK-SE	09407030902	
		镀铬 Chromated		
	---	C.HP3A/H-BK-SE	09400030902	

封底下壳 Housings, surface mounting

	螺纹 Thread	型号 Type	订货号 Part Number	
		喷涂 · 螺栓联锁 Epoxy power paint · Screw locking		
	M20	HP3A/H-SF-2H-M20	19407030950	
	PG13.5	HP3A/H-SF-2H-PG13.5	09407030502	
		镀铬 · 螺栓联锁 Chromated · Screw locking		
	M20	C.HP3A/H-SF-2H-M20	19400030950	
	PG13.5	C.HP3A/H-SF-2H-PG13.5	09407030602	


不封底下壳 Housings, bulkhead mounting

	螺纹 Thread	型号 Type	订货号 Part Number	
		喷涂 · 螺栓联锁 Epoxy power paint · Screw locking		
	---	HP3A/H-SF-2H	09407030950	
		镀铬 · 螺栓联锁 Chromated · Screw locking		
	---	C.HP3A/H-SF-2H	09400030950	


3A 高防护外壳 Pressure tight Hoods & Housings

喷涂/镀铬 Epoxy power paint/Chromated 防护等级 Degree of protection: IP68 H version

上壳 顶出线 高结构 Hoods, top entry, high construction

	螺纹 Thread	型号 Type	订货号 Part Number	
	M25	喷涂 · 螺栓联锁 Epoxy power paint · Screw locking HP3A/H-TEH-2S-M25	19407030411	
	M25	喷涂 · 轴销联锁 Epoxy power paint · Toggle locking HP3A/H-TEH-2T-M25	19407030500	
	M25	镀铬 · 螺栓联锁 Chromated · Screw locking C.HP3A/H-TEH-2S-M25	19400030411	
	M25	镀铬 · 轴销联锁 Chromated · Toggle locking C.HP3A/H-TEH-2T-M25	19400030500	
	M25	C.HP3A/H-TEH-2T-M25	19400030500	


防护盖 Protection covers

	接线方式 Connect way	型号 Type	订货号 Part Number	
	----	喷涂 · 螺栓联锁 Epoxy power paint · Screw locking HP3A/H-MCV-2S	09407030501	
		HP3A/H-MCV-2S/2S	09407030601	
	—	喷涂 · 轴销联锁 Epoxy power paint · Toggle locking HP3A/H-MCV-2T	09407030301	
		HP3A/H-MCV-2T/2S	09407030701	
	----	镀铬 · 螺栓联锁 Chromated · Screw locking C.HP3A/H-MCV-2S	09400030501	
		C.HP3A/H-MCV-2S/2S	09400030601	
	----	镀铬 · 轴销联锁 Chromated · Toggle locking C.HP3A/H-MCV-2T	09400030301	
		C.HP3A/H-MCV-2T/2S	09400030701	
		C.HP3A/H-MCV-2T/2S	09400030701	


防护等级 Degree of protection: IP68


W version

上壳 顶出线 Hoods, top entry

	螺纹 Thread	型号 Type	订货号 Part Number	
	M20	HP3A-TE-2S-M20	19407031440	
	PG11	HP3A-TE-2S-PG11	09407031440	

不封底下壳 Housings, bulkhead mounting

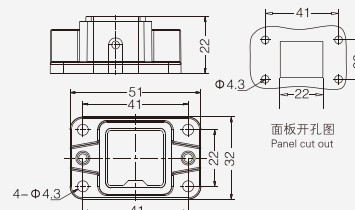	螺纹 Thread	型号 Type	订货号 Part Number	
	----	HP3A-BK-2H	09407030308	

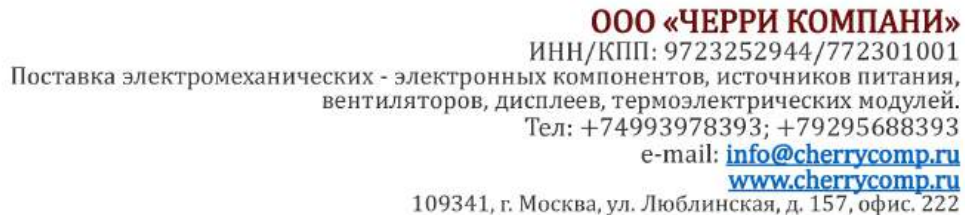


防护等级 Degree of protection: IP65

Technical drawings of the MP3 unit. The front view shows a width of 62. The side view shows a depth of 20.5.


10A 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection: IP65


封底下壳 Housings, surface mounting

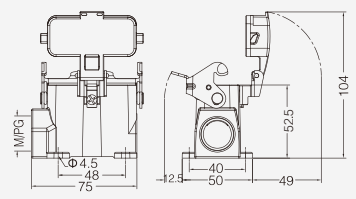	螺纹 Thread	型号 Type	订货号 Part Number	
	M20	H10A-SF-1L-M20	19200100250	
	2M20	H10A-SF-1L-2M20	19200100290	
	M25	H10A-SF-1L-M25	19200100251	
	PG16	H10A-SF-1L-PG16	09200100251	
	2PG16	H10A-SF-1L-2PG16	09200100291	
	PG21	H10A-SF-1L-PG21	09200100252	
	带塑料盖 With plastic cover			
	M20	H10A-SF-1L-CV-M20	19200100294	
	2M20	H10A-SF-1L-CV-2M20	19200100295	
	M25	H10A-SF-1L-CV-M25	19200100296	
	PG16	H10A-SF-1L-CV-PG16	09200100221	
	2PG16	H10A-SF-1L-CV-2PG16	09200100296	
	PG21	H10A-SF-1L-CV-PG21	09200100231	
	带金属盖 With metal cover			
	M20	H10A-SF-1L-MCV-M20	19200100694	
	2M20	H10A-SF-1L-MCV-2M20	19200100695	
	M25	H10A-SF-1L-MCV-M25	19200100696	
	PG16	H10A-SF-1L-MCV-PG16	09200100651	
	2PG16	H10A-SF-1L-MCV-2PG16	09200100691	
	PG21	H10A-SF-1L-MCV-PG21	09200100652	

防护盖 Protection covers

	接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number	
		金属盖/用于上壳 For hoods	H10A-MCV-1L.1	09200105423	

防护盖 Protection covers

	接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number	
		金属盖/用于下壳 For housings	H10A-MCV-2B/1S	09200105424	
		金属盖/用于下壳 For housings	H10A-MCV-2B/2S	09200105425	


16A 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection: IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M20	H16A-SE-2B-M20	19200161540
PG16	H16A-SE-2B-PG16	09200161541



上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	H16A-SEH-2B-M25	19200160546
PG16	H16A-SEH-2B-PG16	09200160540
PG21	H16A-SEH-2B-PG21	09200160541



上壳 顶出线 Hoods, top entry




螺纹 Thread	型号 Type	订货号 Part Number
M20	H16A-TE-2B-M20	19200161440
PG16	H16A-TE-2B-PG16	09200161440



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	H16A-TEH-2B-M25	19200160446
PG16	H16A-TEH-2B-PG16	09200160440
PG21	H16A-TEH-2B-PG21	09200160441



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	H16A-BK-1L	09200160301
---	带塑料盖 With plastic cover	
---	H16A-BK-1L-CV	09200160321
---	带金属盖 With metal cover	
---	H16A-BK-1L-MCV	09200160331




16A 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection: IP65


封底下壳 Housings, surface mounting

	螺纹 Thread	型号 Type	订货号 Part Number	
	M20	H16A-SF-1L-M20	19200161250	
	2M20	H16A-SF-1L-2M20	09200160290	
	M25	H16A-SF-1L-M25	19200160251	
	2M25	H16A-SF-1L-2M25	09200160291	
	PG16	H16A-SF-1L-PG16	09200160251	
	2PG16	H16A-SF-1L-2PG16	09200160291	
	PG21	H16A-SF-1L-PG21	09200160252	
	带塑料盖 With plastic cover			
	M20	H16A-SF-1L-CV-M20	19200160294	
	2M20	H16A-SF-1L-CV-2M20	19200160295	
	M25	H16A-SF-1L-CV-M25	19200160296	
	2M25	H16A-SF-1L-CV-2M25	19200160297	
	PG16	H16A-SF-1L-CV-PG16	09200160221	
	2PG16	H16A-SF-1L-CV-2PG16	09200160296	
	PG21	H16A-SF-1L-CV-PG21	09200160222	
	带金属盖 With metal cover			
	M20	H16A-SF-1L-MCV-M20	19200160694	
	2M20	H16A-SF-1L-MCV-2M20	19200160695	
	M25	H16A-SF-1L-MCV-M25	19200160696	
	2M25	H16A-SF-1L-MCV-2M25	19200160697	
	PG16	H16A-SF-1L-MCV-PG16	09200160651	
	2PG16	H16A-SF-1L-MCV-2PG16	09200160691	
	PG21	H16A-SF-1L-MCV-PG21	09200160652	

防护盖 Protection covers

	接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number	
		金属盖/用于上壳 For hoods	H16A-MCV-1L.1	09200165423	

防护盖 Protection covers

	接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number	
		金属盖/用于下壳 For housings	H16A-MCV-2B/1S	09200165424	
		金属盖/用于下壳 For housings	H16A-MCV-2B/2S	09200165425	


32A 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection: IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M25	H32A-SE-4B-M25	19200321521
PG21	H32A-SE-4B-PG21	09200321520



上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	H32A-SEH-4B-M32	19200320527
PG21	H32A-SEH-4B-PG21	09200320520
PG29	H32A-SEH-4B-PG29	09200320521



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	H32A-TEH-4B-M25	19200320426
M32	H32A-TEH-4B-M32	19200320427
PG21	H32A-TEH-4B-PG21	09200320420
PG29	H32A-TEH-4B-PG29	09200320421



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	H32A-BK-2L	09200320301



封底下壳 Housings, surface mounting




螺纹 Thread	型号 Type	订货号 Part Number
M25	H32A-SF-2L-M25	19200320231
M32	H32A-SF-2L-M32	19200320232
2M32	H32A-SF-2L-2M32	19200320272
PG21	H32A-SF-2L-PG21	09200320230
2PG21	H32A-SF-2L-2PG21	09200320270
PG29	H32A-SF-2L-PG29	09200320231
2PG29	H32A-SF-2L-2PG29	09200320271



塑料防护盖 4卡扣 Protection covers, plastic cover 4 clamps




接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number
	用于上壳 for hoods	H32A-CV-4C	09200328001



塑料防护盖 Protection covers, plastic cover



接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number
	用于电缆对接 For housings	H32A-CV-4B/1	09200328030
	用于下壳 For housings	H32A-CV-4B/2	09200328031




32A 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection: IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M25	H32A-SE-2L-M25	19200321531
PG21	H32A-SE-2L-PG21	09200321530



上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	H32A-SEH-2L-M32	19200320537
PG21	H32A-SEH-2L-PG21	09200320530
PG29	H32A-SEH-2L-PG29	09200320531



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	H32A-TEH-2L-M25	19200320447
M32	H32A-TEH-2L-M32	19200320437
PG21	H32A-TEH-2L-PG21	09200320430
PG29	H32A-TEH-2L-PG29	09200320431



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	H32A-BK-4B	09200320202
---	带塑料盖 With plastic cover	
---	H32A-BK-4B-CV	09200320302
---	带金属盖 With metal cover	
---	H32A-BK-4B-MCV	09200320402



封底下壳 Housings, surface mounting



螺纹 Thread	型号 Type	订货号 Part Number
M25	H32A-SF-4B-M25	19200320251
M32	H32A-SF-4B-M32	19200320258
2M32	H32A-SF-4B-2M32	19200320298
PG21	H32A-SF-4B-PG21	09200320252
2PG21	H32A-SF-4B-2PG21	09200320292
PG29	H32A-SF-4B-PG29	09200320253
2PG29	H32A-SF-4B-2PG29	09200320293
	带塑料盖 With plastic cover	
M25	H32A-SF-4B-CV-M25	19200320226
M32	H32A-SF-4B-CV-M32	19200320227
2M32	H32A-SF-4B-CV-2M32	19200320267
PG21	H32A-SF-4B-CV-PG21	09200320220
2PG21	H32A-SF-4B-CV-2PG21	09200320260
PG29	H32A-SF-4B-CV-PG29	09200320221
2PG29	H32A-SF-4B-CV-2PG29	09200320261
	带金属盖 With metal cover	
M25	H32A-SF-4B-MCV-M25	19200320696
M32	H32A-SF-4B-MCV-M32	19200320698
2M32	H32A-SF-4B-MCV-2M32	19200320699
PG21	H32A-SF-4B-MCV-PG21	09200320652
2PG21	H32A-SF-4B-MCV-2PG21	09200320692
PG29	H32A-SF-4B-MCV-PG29	09200320653
2PG29	H32A-SF-4B-MCV-2PG29	09200320693




6B 塑料外壳 Plastic Hoods & Housings

防护等级 Degree of protection : IP65

上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	H6B.P-SEH-4B-M25	19300060110
M32	H6B.P-SEH-4B-M32	19300060111



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	H6B.P-TEH-4B-M25	19300060120
M32	H6B.P-TEH-4B-M32	19300060121



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	H6B.P-BK-2L	09300060300



封底下壳 高结构 Housings, surface mounting, high construction



螺纹 Thread	型号 Type	订货号 Part Number
M25	H6B.P-SFH-2L-M25	19300060131
2M25	H6B.P-SFH-2L-2M25	19300060135
M32	H6B.P-SFH-2L-M32	19300060132
2M32	H6B.P-SFH-2L-2M32	19300060136



防护盖 Protection covers




螺纹 Thread	型号 Type	订货号 Part Number
---	H6B.P-CV-4B/2	09300060140



防护盖 Protection covers



螺纹 Thread	型号 Type	订货号 Part Number
---	H6B.P-CV-2L/1	09300060145




6B 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M20	H6B-SE-2B-M20	19300061540
M25	H6B-SE-2B-M25	19300061541
PG13.5	H6B-SE-2B-PG13.5	09300061540
PG16	H6B-SE-2B-PG16	09300061541



上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	H6B-SEH-2B-M25	19300060546
M32	H6B-SEH-2B-M32	19300060547
PG21	H6B-SEH-2B-PG21	09300060542
PG29	H6B-SEH-2B-PG29	09300060543



上壳 顶出线 Hoods, top entry



螺纹 Thread	型号 Type	订货号 Part Number
M20	H6B-TE-2B-M20	19300061440
M25	H6B-TE-2B-M25	19300061441
PG13.5	H6B-TE-2B-PG13.5	09300061440
PG16	H6B-TE-2B-PG16	09300061441




上壳 顶出线 高结构 Hoods, top entry, high construction



螺纹 Thread	型号 Type	订货号 Part Number
M20	H6B-TEH-2B-M20	19300060445
M25	H6B-TEH-2B-M25	19300060446
M32	H6B-TEH-2B-M32	19300060447
PG16	H6B-TEH-2B-PG16	09300060441
PG21	H6B-TEH-2B-PG21	09300060442
PG29	H6B-TEH-2B-PG29	09300060443


我司可提供顶部、侧面同时出线的非标品, 详见P15-04
We can provide non-standard products with both top&side entry, see P15-04



飞线下壳 Housings, cable to cable




螺纹 Thread	型号 Type	订货号 Part Number
M20	H6B-CCT-1L-M20	19300061750
PG13.5	H6B-CCT-1L-PG13.5	09300061750
PG16	H6B-CCT-1L-PG16	09300061751



飞线下壳 高结构 Housings, cable to cable, high construction



螺纹 Thread	型号 Type	订货号 Part Number
M25	H6B-CCTH-1L-M25	19300060756
PG21	H6B-CCTH-1L-PG21	09300060752
PG29	H6B-CCTH-1L-PG29	09300060753




6B 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection : IP65

不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	H6B-BK-1L	09300060301
---	带塑料盖 With plastic cover	
---	H6B-BK-1L-CV	09300060302
---	带金属料盖 With metal cover	
---	H6B-BK-1L-MCV	09300060318

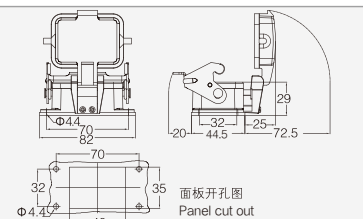

封底下壳 Housings, surface mounting




螺纹 Thread	型号 Type	订货号 Part Number
M20	6B-SF-1L-M20	19300061250
2M20	H6B-SF-1L-2M20	19300061290
M25	H6B-SF-1L-M25	19300061350
2M25	H6B-SF-1L-2M25	19300061390
PG16	H6B-SF-1L-PG16	09300061251
2PG16	H6B-SF-1L-2PG16	09300061291
	带塑料盖 With plastic cover	
M20	H6B-SF-1L-CV-M20	19300061255
2M20	H6B-SF-1L-CV-2M20	19300061295
M25	H6B-SF-1L-CV-M25	19300061355
2M25	H6B-SF-1L-CV-2M25	19300061395
PG16	H6B-SF-1L-CV-PG16	09300061256
2PG16	H6B-SF-1L-CV-2PG16	09300061296
	带金属盖 With metal cover	
M20	H6B-SF-1L-MCV-M20	19300062255
2M20	H6B-SF-1L-MCV-2M20	19300062295
M25	H6B-SF-1L-MCV-M25	19300062355
2M25	H6B-SF-1L-MCV-2M25	19300062395
PG16	H6B-SF-1L-MCV-PG16	09300062256
2PG16	H6B-SF-1L-MCV-2PG16	09300062296

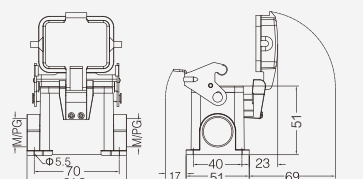

封底下壳 高结构 Housings, surface mounting, high construction



螺纹 Thread	型号 Type	订货号 Part Number
M25	H6B-SFH-1L-M25	19300060251
2M25	H6B-SFH-1L-2M25	19300060291
M32	H6B-SFH-1L-M32	19300060252
2M32	H6B-SFH-1L-2M32	19300060292
PG21	H6B-SFH-1L-PG21	09300060252
2PG21	H6B-SFH-1L-2PG21	09300060292
PG29	H6B-SFH-1L-PG29	09300060253
2PG29	H6B-SFH-1L-2PG29	09300060293
	带塑料盖 With plastic cover	
M25	H6B-SFH-1L-CV-M25	19300060256
2M25	H6B-SFH-1L-CV-2M25	19300060296
M32	H6B-SFH-1L-CV-M32	19300060257
2M32	H6B-SFH-1L-CV-2M32	19300060297
PG21	H6B-SFH-1L-CV-PG21	09300060257
2PG21	H6B-SFH-1L-CV-2PG21	09300060297
PG29	H6B-SFH-1L-CV-PG29	09300060258
2PG29	H6B-SFH-1L-CV-2PG29	09300060298
	带金属盖 With metal cover	
M25	H6B-SFH-1L-MCV-M25	19300067256
2M25	H6B-SFH-1L-MCV-2M25	19300067296
M32	H6B-SFH-1L-MCV-M32	19300061257
2M32	H6B-SFH-1L-MCV-2M32	19300061297
PG21	H6B-SFH-1L-MCV-PG21	09300062257
2PG21	H6B-SFH-1L-MCV-2PG21	09300062297
PG29	H6B-SFH-1L-MCV-PG29	09300062258
2PG29	H6B-SFH-1L-MCV-2PG29	09300062298

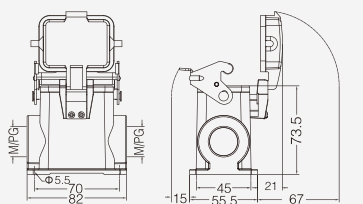

6B 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection : IP65

防护盖 Protection covers, plastic




接线方式
Connect way

描述
Applications
塑料盖
For hoods

型号
Type
H6B-CV-2C

订货号
Part Number
09300065420



防护盖 Protection covers, metal



接线方式
Connect way


描述
Applications
金属盖/用于上壳
For hoods

型号
Type
H6B-MCV-2B/1


订货号
Part Number
09300065427



金属盖/用于下壳
For housings

型号
Type
H6B-MCV-2B/2

订货号
Part Number
09300065425



防护盖 Protection covers, metal




接线方式
Connect way


描述
Applications
金属盖/用于上壳
For hoods

型号
Type
H6B-MCV-1L.1S

订货号
Part Number
09300065423



上壳侧出线/顶出线 高结构 Hoods,side&top entry,high construction



型号为:H6B-SEH/TEH-2B-XX/XX
如有需要请与我司联系


6B 金属外壳 适用于苛刻环境(耐腐蚀) Metal Hoods & Housings For higher environmental requirements

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M20	H6B-MSE-2B-M20	19370061540
PG13.5	H6B-MSE-2B-PG13.5	09370061540



上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	H6B-MSEH-2B-M25	19370060546
PG21	H6B-MSEH-2B-PG21	09370060542



上壳 顶出线 Hoods, top entry




螺纹 Thread	型号 Type	订货号 Part Number
M20	H6B-MTE-2B-M20	19370061440
PG13.5	H6B-MTE-2B-PG13.5	09370061440
PG16	H6B-MTE-2B-PG16	09370061441



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	H6B-MTEH-2B-M25	19370060446



飞线下壳 Housings, cable to cable



螺纹 Thread	型号 Type	订货号 Part Number
PG13.5	H6B-MCCT-1L-PG13.5	09370061750




6B 金属外壳 适用于苛刻环境(耐腐蚀) Metal Hoods & Housings For higher environmental requirements

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
---	H6B-MBK-1L	09370060301
---	带金属盖 With metal cover	
---	H6B-MBK-1L-MMCV	09370060318



封底下壳 Housings, surface mounting




螺纹 Thread	型号 Type	订货号 Part Number
2PG16	H6B-MSF-1L-2PG16	09370061291
2M20	H6B-MSF-1L-2M20	19370061290



防护盖 Protection covers



螺纹 Thread	型号 Type	订货号 Part Number
M25	H6B-MMCV-2B/1	09370065407
	H6B-MMCV-2B/2	09370065405



6B 高防护外壳 Hoods & Housings for harsh environmental requirements


防护等级 Degree of protection : IP68

W version

上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M20	HP6B-SEH-2S-M20	19400060210
M25	HP6B-SEH-2S-M25	19400060211
M32	HP6B-SEH-2S-M32	19400060212
PG16	HP6B-SEH-2S-PG16	09400060211
PG21	HP6B-SEH-2S-PG21	09400060212



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M20	HP6B-TEH-2S-M20	19400060220
M25	HP6B-TEH-2S-M25	19400060221
M32	HP6B-TEH-2S-M32	19400060222
PG16	HP6B-TEH-2S-PG16	09400060221
PG21	HP6B-TEH-2S-PG21	09400060222
PG29	HP6B-TEH-2S-PG29	09400060223



封底下壳 高结构 Housings, surface mounting, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M20	HP6B-SFH-2H-M20	19400060230
M25	HP6B-SFH-2H-M25	19400060231
M32	HP6B-SFH-2H-M32	19400060232
PG16	HP6B-SFH-2H-PG16	09400060231
PG21	HP6B-SFH-2H-PG21	09400060232



不封底下壳 Housings, bulkhead mounting



螺纹 Thread	型号 Type	订货号 Part Number
---	HP6B-BK-2H	09400060201



6B 高防护外壳 Hoods & Housings for harsh environmental requirements


防护等级 Degree of protection : IP68

H version

上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
	螺栓联锁 Screw locking	
M20	HP6B/H-SEH-2S-M20	19400060510
M25	HP6B/H-SEH-2S-M25	19400060511
M32	HP6B/H-SEH-2S-M32	19400060512
PG16	HP6B/H-SEH-2S-PG16	09400060511
PG21	HP6B/H-SEH-2S-PG21	09400060512
PG29	HP6B/H-SEH-2S-PG29	09400060513
	轴销联锁 Toggle locking	
M20	HP6B/H-SEH-2T-M20	19400060500
M25	HP6B/H-SEH-2T-M25	19400060501
M32	HP6B/H-SEH-2T-M32	19400060502
PG16	HP6B/H-SEH-2T-PG16	09400060501
PG21	HP6B/H-SEH-2T-PG21	09400060502



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
	螺栓联锁 Screw locking	
M20	HP6B/H-TEH-2S-M20	19400060410
M25	HP6B/H-TEH-2S-M25	19400060411
M32	HP6B/H-TEH-2S-M32	19400060412
PG16	HP6B/H-TEH-2S-PG16	09400060411
PG21	HP6B/H-TEH-2S-PG21	09400060412
PG29	HP6B/H-TEH-2S-PG29	09400060413
	轴销联锁 Toggle locking	
M20	HP6B/H-TEH-2T-M20	19400060400
M25	HP6B/H-TEH-2T-M25	19400060401
M32	HP6B/H-TEH-2T-M32	19400060402
PG16	HP6B/H-TEH-2T-PG16	09400060401
PG21	HP6B/H-TEH-2T-PG21	09400060402
PG29	HP6B/H-TEH-2T-PG29	09400060403



封底下壳 高结构 Housings, surface mounting, high construction



螺纹 Thread	型号 Type	订货号 Part Number
	螺栓联锁 Screw locking	
M20	HP6B/H-SFH-2H-M20	19400061260
M25	HP6B/H-SFH-2H-M25	19400061261
M32	HP6B/H-SFH-2H-M32	19400061262
PG16	HP6B/H-SFH-2H-PG16	09400061260
PG21	HP6B/H-SFH-2H-PG21	09400061261
PG29	HP6B/H-SFH-2H-PG29	09400061262
	轴销联锁 Toggle locking	
M20	HP6B/H-SFH-2T-M20	19400061270
M25	HP6B/H-SFH-2T-M25	19400061271
M32	HP6B/H-SFH-2T-M32	19400061272
PG16	HP6B/H-SFH-2T-PG16	09400061270
PG21	HP6B/H-SFH-2T-PG21	09400061271
PG29	HP6B/H-SFH-2T-PG29	09400061272



6B 高防护外壳 Hoods & Housings for harsh environmental requirements


防护等级 Degree of protection : IP68

H version

不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
----	螺栓联锁 Screw locking	
----	HP6B/H-BK-2H	09400060311
----	轴销联锁 Toggle locking	
----	HP6B/H-BK-2T	09400060301
----	带金属盖 With metal cover	
----	螺栓联锁 Screw locking	
----	HP6B/H-BK-2H-MCV	09400060317
----	轴销联锁 Toggle locking	
----	HP6B/H-BK-2T-MCV	09400060307



防护盖 Protection covers




螺纹 Thread	型号 Type	订货号 Part Number
----	螺栓联锁 Screw locking	
----	HP6B/H-MCV-2S	09400065411
----	轴销联锁 Toggle locking	
----	HP6B/H-MCV-2T	09400065401



上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M20	HP6B/H-SEH-4S-M20	19400061360
M25	HP6B/H-SEH-4S-M25	19400061361
M32	HP6B/H-SEH-4S-M32	19400061362
M40	HP6B/H-SEH-4S-M40	19400061363
PG16	HP6B/H-SEH-4S-PG16	09400061361
PG21	HP6B/H-SEH-4S-PG21	09400061362



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M20	HP6B/H-TEH-4S-M20	19400061460
M25	HP6B/H-TEH-4S-M25	19400061461
M32	HP6B/H-TEH-4S-M32	19400061462
M40	HP6B/H-TEH-4S-M40	19400061463
PG16	HP6B/H-TEH-4S-PG16	09400061461
PG21	HP6B/H-TEH-4S-PG21	09400061462
PG29	HP6B/H-TEH-4S-PG29	09400061463



不封底下壳 Housings, bulkhead mounting



螺纹 Thread	型号 Type	订货号 Part Number
----	HP6B/H-BK-4H	09400060202

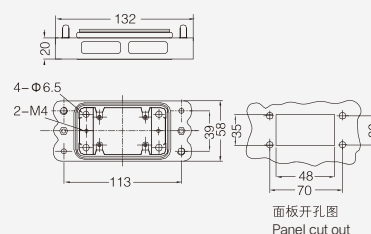


6B 高防护外壳 Hoods & Housings for harsh environmental requirements

防护等级 Degree of protection : IP68

上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M20	HC6B-SEH-2S-M20	19400061500
M25	HC6B-SEH-2S-M25	19400061501
PG16	HC6B-SEH-2S-PG16	09400061500
PG21	HC6B-SEH-2S-PG21	09400061501



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M20	HC6B-TEH-2S-M20	19400061550
M25	HC6B-TEH-2S-M25	19400061551
PG16	HC6B-TEH-2S-PG16	09400061550
PG21	HC6B-TEH-2S-PG21	09400061551



芯体安装支块 Protection covers



描述 Application	型号 Type	订货号 Part Number
整体型外壳适配 For integral type hoods	APT-C	09400061600




10B 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection : IP65

不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	H10B-BK-1L	09300100305
---	带塑料盖 With plastic cover	
---	H10B-BK-1L-CV	09300100303
---	带金属料盖 With metal cover	
---	H10B-BK-1L-MCV	09300100318

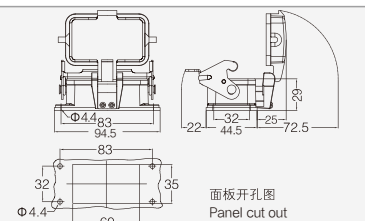

封底下壳 Housings, surface mounting




螺纹 Thread	型号 Type	订货号 Part Number
M20	H10B-SF-1L-M20	19300101250
2M20	H10B-SF-1L-2M20	19300101290
M25	H10B-SF-1L-M25	19300101251
2M25	H10B-SF-1L-2M25	19300101291
PG16	H10B-SF-1L-PG16	09300101251
2PG16	H10B-SF-1L-2PG16	09300101291
	带塑料盖 With plastic cover	
M20	H10B-SF-1L-CV-M20	19300101255
2M20	H10B-SF-1L-CV-2M20	19300101295
M25	H10B-SF-1L-CV-M25	19300101256
2M25	H10B-SF-1L-CV-2M25	19300101296
PG16	H10B-SF-1L-CV-PG16	09300101256
2PG16	H10B-SF-1L-CV-2PG16	09300101296
	带金属盖 With metal cover	
M20	H10B-SF-1L-MCV-M20	19300102255
2M20	H10B-SF-1L-MCV-2M20	19300102295
M25	H10B-SF-1L-MCV-M25	19300102256
2M25	H10B-SF-1L-MCV-2M25	19300102296
PG16	H10B-SF-1L-MCV-PG16	09300102256
2PG16	H10B-SF-1L-MCV-2PG16	09300102296

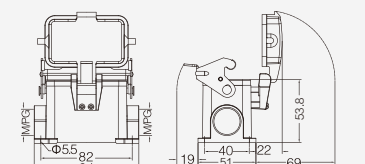

封底下壳 高结构 Housings, surface mounting, high construction



螺纹 Thread	型号 Type	订货号 Part Number
M25	H10B-SFH-1L-M25	19300100291
2M25	H10B-SFH-1L-2M25	19300100391
M32	H10B-SFH-1L-M32	19300100292
2M32	H10B-SFH-1L-2M32	19300100392
PG21	H10B-SFH-1L-PG21	09300100192
2PG21	H10B-SFH-1L-2PG21	09300100292
PG29	H10B-SFH-1L-PG29	09300100193
2PG29	H10B-SFH-1L-2PG29	09300100293
	带塑料盖 With plastic cover	
M25	H10B-SFH-1L-CV-M25	19300100196
2M25	H10B-SFH-1L-CV-2M25	19300100296
M32	H10B-SFH-1L-CV-M32	19300100197
2M32	H10B-SFH-1L-CV-2M32	19300100297
PG21	H10B-SFH-1L-CV-PG21	09300100197
2PG21	H10B-SFH-1L-CV-2PG21	09300100297
PG29	H10B-SFH-1L-CV-PG29	09300100198
2PG29	H10B-SFH-1L-CV-2PG29	09300100298
	带金属盖 With metal cover	
M25	H10B-SFH-1L-MCV-M25	19300107295
2M25	H10B-SFH-1L-MCV-2M25	19300107296
M32	H10B-SFH-1L-MCV-M32	19300107297
2M32	H10B-SFH-1L-MCV-2M32	19300107298
PG21	H10B-SFH-1L-MCV-PG21	09300102197
2PG21	H10B-SFH-1L-MCV-2PG21	09300102297
PG29	H10B-SFH-1L-MCV-PG29	09300102198
2PG29	H10B-SFH-1L-MCV-2PG29	09300102298

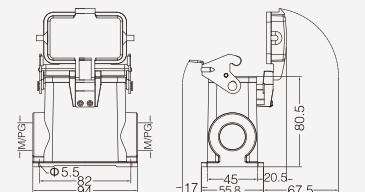


10B 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M20	H10B-SE-4B-M20	19300101520
M25	H10B-SE-4B-M25	19300101521
PG16	H10B-SE-4B-PG16	09300101521



上壳 侧出线 高结构 Hoods, side entry, high construction



螺纹 Thread	型号 Type	订货号 Part Number
M25	H10B-SEH-4B-M25	19300100526
M32	H10B-SEH-4B-M32	19300100527
PG21	H10B-SEH-4B-PG21	09300100522
PG29	H10B-SEH-4B-PG29	09300100523




我司可提供顶部、侧面同时出线的非标品, 详见P16-06
We can provide non-standard products with both top&side entry, see P16-06

上壳 顶出线 Hoods, top entry




螺纹 Thread	型号 Type	订货号 Part Number
M20	H10B-TE-4B-M20	19300101420
M25	H10B-TE-4B-M25	19300101421
PG16	H10B-TE-4B-PG16	09300101421



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	H10B-TEH-4B-M25	19300100426
M32	H10B-TEH-4B-M32	19300100427
2M20	H10B-TEH-4B-2M20	19300100465
PG16	H10B-TEH-4B-PG16	09300100421
PG21	H10B-TEH-4B-PG21	09300100422
PG29	H10B-TEH-4B-PG29	09300100423



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	H10B-BK-2L	09300100301



封底下壳 Housings, surface mounting




螺纹 Thread	型号 Type	订货号 Part Number
M20	H10B-SF-2L-M20	19300101230
2M20	H10B-SF-2L-2M20	19300101270
M25	H10B-SF-2L-M25	19300101231
2M25	H10B-SF-2L-2M25	19300101271
PG16	H10B-SF-2L-PG16	09300101231
2PG16	H10B-SF-2L-2PG16	09300101271




10B 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection : IP65


封底下壳 高结构 Housings, surface mounting, high construction

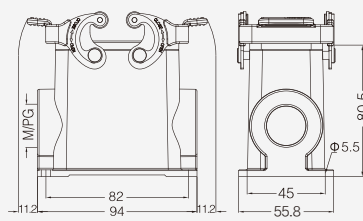	螺纹 Thread	型号 Type	订货号 Part Number	
	M25	H10B-SFH-2L-M25	19300100231	
	2M25	H10B-SFH-2L-2M25	19300100271	
	M32	H10B-SFH-2L-M32	19300100232	
	2M32	H10B-SFH-2L-2M32	19300100272	
	PG21	H10B-SFH-2L-PG21	09300100232	
	2PG21	H10B-SFH-2L-2PG21	09300100272	
	PG29	H10B-SFH-2L-PG29	09300100233	
	2PG29	H10B-SFH-2L-2PG29	09300100273	


飞线下壳 Housings, cable to cable

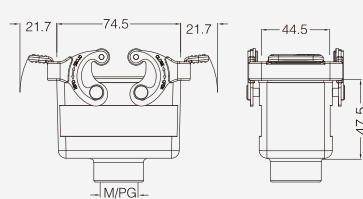	螺纹 Thread	型号 Type	订货号 Part Number	
	M20	H10B-CCT-2L-M20	19300101730	
	PG16	H10B-CCT-2L-PG16	09300101731	


飞线下壳 高结构 Housings, cable to cable, high construction

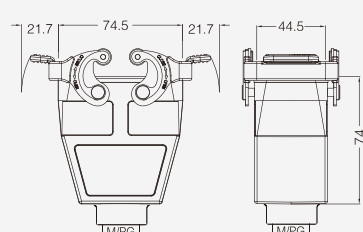	螺纹 Thread	型号 Type	订货号 Part Number	
	M25	H10B-CCTH-2L-M25	19300100736	
	M32	H10B-CCTH-2L-M32	19300100737	
	PG21	H10B-CCTH-2L-PG21	09300100732	
	PG29	H10B-CCTH-2L-PG29	09300100733	

塑料防护盖 Protection covers, plastic

	接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number	
	---	用于上壳 For hoods	H10B-CV-4C	09300105401	

塑料防护盖 Protection covers, Plastic

	接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number	
		塑料盖/用于飞线下壳 For Housings, cable to cable	H10B-CV-4B/1	09300105426	
		塑料盖/用于不封底,封底下壳 For housing, bulkhead/surface mounting	H10B-CV-4B/2	09300105428	


10B 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M20	H10B-SE-2L-M20	19300101530
PG16	H10B-SE-2L-PG16	09300101531

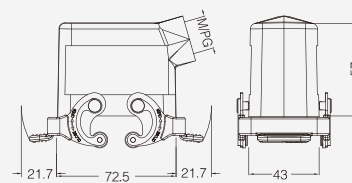

上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	H10B-SEH-2L-M25	19300100536
M32	H10B-SEH-2L-M32	19300100537
PG21	H10B-SEH-2L-PG21	09300100532
PG29	H10B-SEH-2L-PG29	09300100533

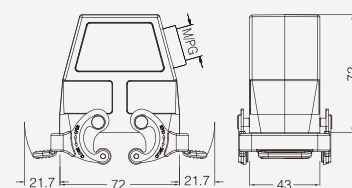

上壳 顶出线 Hoods, top entry




螺纹 Thread	型号 Type	订货号 Part Number
M20	H10B-TE-2L-M20	19300101430
PG16	H10B-TE-2L-PG16	09300101431

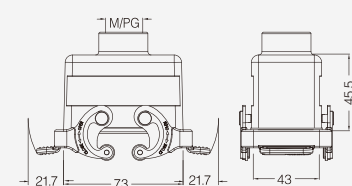

上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	H10B-TEH-2L-M25	19300100436
M32	H10B-TEH-2L-M32	19300100437
PG21	H10B-TEH-2L-PG21	09300100432
PG29	H10B-TEH-2L-PG29	09300100433

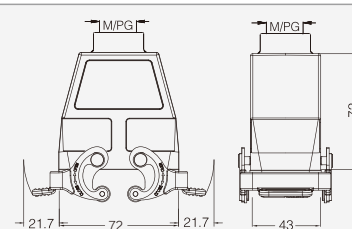

不封底下壳 Housings, bulkhead mounting



螺纹 Thread	型号 Type	订货号 Part Number
---	H10B-BK-4B	09300100300
---	带塑料盖 With plastic cover	
---	H10B-BK-4B-CV	09300100302
---	带金属盖 With metal cover	
---	H10B-BK-4B-MCV	09300100317

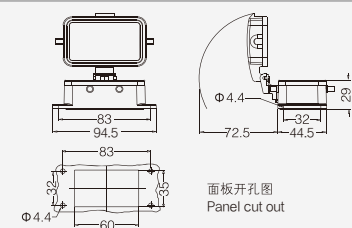

上壳侧出线/顶出线 高结构 Hoods,side&top entry,high construction



型号为:H10B-SEH/TEH-4B-XX/XX
如有需要请与我司联系


10B 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection : IP65

封底下壳 Housings, surface mounting




螺纹 Thread	型号 Type	订货号 Part Number
M20	H10B-SF-4B-M20	19300101125
2M20	H10B-SF-4B-2M20	19300101165
M25	H10B-SF-4B-M25	19300101126
2M25	H10B-SF-4B-2M25	19300101166
PG16	H10B-SF-4B-PG16	09300101121
2PG16	H10B-SF-4B-2PG16	09300101161
带塑料盖 With plastic cover		
M20	H10B-SF-4B-CV-M20	19300101225
2M20	H10B-SF-4B-CV-2M20	19300101265
M25	H10B-SF-4B-CV-M25	19300101226
2M25	H10B-SF-4B-CV-2M25	19300101266
PG16	H10B-SF-4B-CV-PG16	09300101221
2PG16	H10B-SF-4B-CV-2PG16	09300101261
带金属盖 With metal cover		
M20	H10B-SF-4B-MCV-M20	19300102225
2M20	H10B-SF-4B-MCV-2M20	19300102265
M25	H10B-SF-4B-MCV-M25	19300102226
2M25	H10B-SF-4B-MCV-2M25	19300102266
PG16	H10B-SF-4B-MCV-PG16	09300102221
2PG16	H10B-SF-4B-MCV-2PG16	09300102261

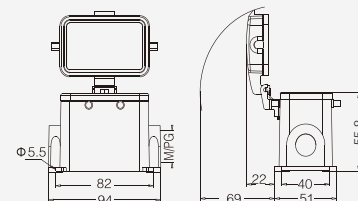

封底下壳 高结构 Housings, surface mounting, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	H10B-SFH-4B-M25	19300100126
2M25	H10B-SFH-4B-2M25	19300100166
M32	H10B-SFH-4B-M32	19300100127
2M32	H10B-SFH-4B-2M32	19300100167
PG21	H10B-SFH-4B-PG21	09300100122
2PG21	H10B-SFH-4B-2PG21	09300100162
PG29	H10B-SFH-4B-PG29	09300100123
2PG29	H10B-SFH-4B-2PG29	09300100163
带塑料盖 With plastic cover		
M25	H10B-SFH-4B-CV-M25	19300100226
2M25	H10B-SFH-4B-CV-2M25	19300100266
M32	H10B-SFH-4B-CV-M32	19300100227
2M32	H10B-SFH-4B-CV-2M32	19300100267
PG21	H10B-SFH-4B-CV-PG21	09300100222
2PG21	H10B-SFH-4B-CV-2PG21	09300100262
PG29	H10B-SFH-4B-CV-PG29	09300100223
2PG29	H10B-SFH-4B-CV-2PG29	09300100263
带金属盖 With metal cover		
M25	H10B-SFH-4B-MCV-M25	19300102226
2M25	H10B-SFH-4B-MCV-2M25	19300102266
M32	H10B-SFH-4B-MCV-M32	19300102227
2M32	H10B-SFH-4B-MCV-2M32	19300102267
PG21	H10B-SFH-4B-MCV-PG21	09300102222
2PG21	H10B-SFH-4B-MCV-2PG21	09300102262
PG29	H10B-SFH-4B-MCV-PG29	09300102223
2PG29	H10B-SFH-4B-MCV-2PG29	09300102263

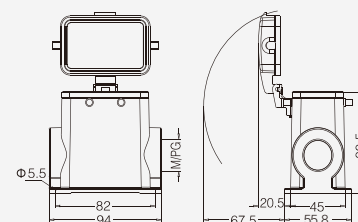

防护盖 Protection covers, metal




接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number
	金属盖/用于上壳 For hoods	H10B-MCV-4B/1	09300105427
	金属盖/用于下壳 For housings	H10B-MCV-4B/2	09300105425



防护盖 Protection covers, metal



接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number
	金属盖/用于上壳 For hoods	H10B-MCV-2L.1S	09300105423
	金属盖/用于下壳 For housings	H10B-MCV-2L.2S	09300105424



10B 金属外壳 适用于苛刻环境(耐腐蚀) Metal Hoods & Housings For higher environmental requirements


防护等级 Degree of protection : IP65

W version

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M20	H10B-MSE-4B-M20	19370101520
PG16	H10B-MSE-4B-PG16	09370101521



上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	H10B-MSEH-4B-M25	19370100526



上壳 顶出线 Hoods, top entry




螺纹 Thread	型号 Type	订货号 Part Number
M20	H10B-MTE-4B-M20	19370101420
PG16	H10B-MTE-4B-PG16	09370101421



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	H10B-MTEH-4B-M32	19370100427



飞线下壳 Housings, cable to cable




螺纹 Thread	型号 Type	订货号 Part Number
PG16	H10B-MCCT-2L-PG16	09370101731

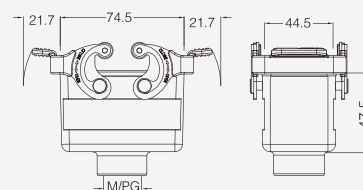

不封底下壳 Housings, bulkhead mounting



螺纹 Thread	型号 Type	订货号 Part Number
---	H10B-MBK-2L	09370100301




10B 金属外壳 适用于苛刻环境(耐腐蚀) Metal Hoods & Housings For higher environmental requirements

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M20	H10B-MSF-2L-2M20	19370101270
PG16	H10B-MSF-2L-2PG16	09370101271



上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	H10B-MSFH-2L-2M32	19370100272



防护盖 Protection covers, metal




螺纹 Thread	型号 Type	订货号 Part Number
---	H10B-MMCV-2L.1S	09370105403



防护盖 Protection covers, metal



螺纹 Thread	型号 Type	订货号 Part Number
---	H10B-MMCV-4B/2	09370105405




防护等级 Degree of protection : IP65 2耳

上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	H10B-MTEH-2B-M32	19370100447



封底下壳 高结构 Housings, surface mounting, high construction



螺纹 Thread	型号 Type	订货号 Part Number
M25	H10B-MSFH-1L-M25	19370100291



10B 高防护外壳 Hoods & Housings for harsh environmental requirements


防护等级 Degree of protection : IP68

W version

上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M20	HP10B-SEH-2S-M20	19400100210
M25	HP10B-SEH-2S-M25	19400100211
M32	HP10B-SEH-2S-M32	19400100212
PG16	HP10B-SEH-2S-PG16	09400100211
PG21	HP10B-SEH-2S-PG21	09400100212



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M20	HP10B-TEH-2S-M20	19400100220
M25	HP10B-TEH-2S-M25	19400100221
M32	HP10B-TEH-2S-M32	19400100222
PG16	HP10B-TEH-2S-PG16	09400100221
PG21	HP10B-TEH-2S-PG21	09400100222
PG29	HP10B-TEH-2S-PG29	09400100223



封底下壳 高结构 Housings, surface mounting, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M20	HP10B-SFH-2H-M20	19400100230
M25	HP10B-SFH-2H-M25	19400100231
M32	HP10B-SFH-2H-M32	19400100232
PG16	HP10B-SFH-2H-PG16	09400100231
PG21	HP10B-SFH-2H-PG21	09400100232



不封底下壳 Housings, bulkhead mounting



螺纹 Thread	型号 Type	订货号 Part Number
---	HP10B-BK-2H	09400100201



10B 高防护外壳 Hoods & Housings for harsh environmental requirements


防护等级 Degree of protection : IP68

H version

上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
	螺栓联锁 Screw locking	
M20	HP10B/H-SEH-2S-M20	19400100510
M25	HP10B/H-SEH-2S-M25	19400100511
M32	HP10B/H-SEH-2S-M32	19400100512
M40	HP10B/H-SEH-2S-M40	19400100513
PG16	HP10B/H-SEH-2S-PG16	09400100511
PG21	HP10B/H-SEH-2S-PG21	09400100512
PG29	HP10B/H-SEH-2S-PG29	09400100513
	轴销联锁 Toggle locking	
M20	HP10B/H-SEH-2T-M20	19400100500
M25	HP10B/H-SEH-2T-M25	19400100501
M32	HP10B/H-SEH-2T-M32	19400100502
PG16	HP10B/H-SEH-2T-PG16	09400100501
PG21	HP10B/H-SEH-2T-PG21	09400100502
PG29	HP10B/H-SEH-2T-PG29	09400100503



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
	螺栓联锁 Screw locking	
M20	HP10B/H-TEH-2S-M20	19400100410
M25	HP10B/H-TEH-2S-M25	19400100411
M32	HP10B/H-TEH-2S-M32	19400100412
M40	HP10B/H-TEH-2S-M40	19400100413
2M20	HP10B/H-TEH-2S-2M20	19400100430
PG16	HP10B/H-TEH-2S-PG16	09400100411
PG21	HP10B/H-TEH-2S-PG21	09400100412
PG29	HP10B/H-TEH-2S-PG29	09400100413
	轴销联锁 Toggle locking	
M20	HP10B/H-TEH-2T-M20	19400100400
M25	HP10B/H-TEH-2T-M25	19400100401
M32	HP10B/H-TEH-2T-M32	19400100402
PG16	HP10B/H-TEH-2T-PG16	09400100401
PG21	HP10B/H-TEH-2T-PG21	09400100402
PG29	HP10B/H-TEH-2T-PG29	09400100403

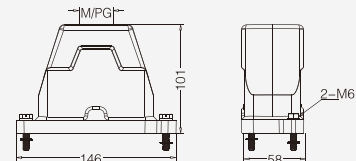


封底下壳 高结构 Housings, surface mounting, high construction



螺纹 Thread	型号 Type	订货号 Part Number
	螺栓联锁 Screw locking	
M20	HP10B/H-SFH-2H-M20	19400101260
M25	HP10B/H-SFH-2H-M25	19400101261
M32	HP10B/H-SFH-2H-M32	19400101262
M40	HP10B/H-SFH-2H-M40	19400101263
2M25	HP10B/H-SFH-2H-2M25	19400101271
2M32	HP10B/H-SFH-2H-2M32	19400101272
PG16	HP10B/H-SFH-2H-PG16	09400101260
PG21	HP10B/H-SFH-2H-PG21	09400101261
PG29	HP10B/H-SFH-2H-PG29	09400101262
	轴销联锁 Toggle locking	
M20	HP10B/H-SFH-2T-M20	19400101280
M25	HP10B/H-SFH-2T-M25	19400101281
M32	HP10B/H-SFH-2T-M32	19400101282
PG16	HP10B/H-SFH-2T-PG16	09400101281
PG21	HP10B/H-SFH-2T-PG21	09400101282
PG29	HP10B/H-SFH-2T-PG29	09400101283



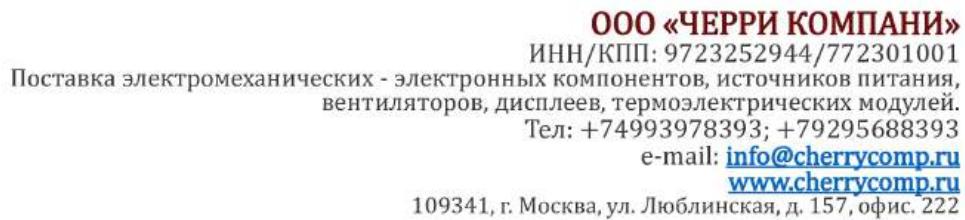


防护等级 Degree of protection : IP68

H version

	螺纹 Thread	型号 Type	订货号 Part Number	
	螺栓联锁 Screw locking	HP10B/H-BK-2H	09400100311	
	轴销联锁 Toggle locking	HP10B/H-BK-2T	09400100301	
	带金属盖			
	螺栓联锁 Screw locking	HP10B/H-BK-2H-MCV	09400100317	
	轴销联锁 Toggle locking	HP10B/H-BK-2T-MCV	09400100307	

	螺纹 Thread	型号 Type	订货号 Part Number
	---	螺栓联锁 Screw locking	
	---	HP10B/H-MCV-2S	09400105411
	---	轴销联锁 Toggle locking	
	---	HP10B/H-MCV-2T	09400105401

	螺纹 Thread	型号 Type	订货号 Part Number		
	M20	HP10B/H-SEH-4S-M20	19400101360		
	M25	HP10B/H-SEH-4S-M25	19400101361		
	M32	HP10B/H-SEH-4S-M32	19400101362		
	M40	HP10B/H-SEH-4S-M40	19400101363		
	PG16	HP10B/H-SEH-4S-PG16	09400101361		
	PG21	HP10B/H-SEH-4S-PG21	09400101362		

	螺纹 Thread	型号 Type	订货号 Part Number	
	M20	HP10B/H-TEH-4S-M20	19400101460	
	M25	HP10B/H-TEH-4S-M25	19400101461	
	M32	HP10B/H-TEH-4S-M32	19400101462	
	M40	HP10B/H-TEH-4S-M40	19400101463	
	PG16	HP10B/H-TEH-4S-PG16	09400101461	
	PG21	HP10B/H-TEH-4S-PG21	09400101462	
	PG29	HP10B/H-TEH-4S-PG29	09400101463	

	螺纹 Thread ---	型号 Type HP10B/H-BK-4H	订货号 Part Number 09400100202	 面板开孔图 Panel cut out
---	------------------	--------------------------	--------------------------------	--


10B 高防护外壳 Hoods & Housings for harsh environmental requirements

防护等级 Degree of protection : IP68

上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	HC10B-SEH-2S-M25	19400101500
M32	HC10B-SEH-2S-M32	19400101501
PG16	HC10B-SEH-2S-PG16	09400101500
PG21	HC10B-SEH-2S-PG21	09400101501



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	HC10B-TEH-2S-M25	19400101550
M32	HC10B-TEH-2S-M32	19400101551
PG16	HC10B-TEH-2S-PG16	09400101550
PG21	HC10B-TEH-2S-PG21	09400101551



芯体安装支块 Protection covers



描述 Application	型号 Type	订货号 Part Number
整体型外壳适配 For integral type hoods	APT-C	09400101600




HV10B 金属外壳 用于高电压插芯 (HVE系列) Metal Hoods & Housings For High Voltage Inserts(HVE Series)

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M20	HV10B-SE-2B-M20	19340101540
PG16	HV10B-SE-2B-PG16	09340101541



上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV10B-SEH-2B-M25	19340100546
M32	HV10B-SEH-2B-M32	19340100547
PG21	HV10B-SEH-2B-PG21	09340100542
PG29	HV10B-SEH-2B-PG29	09340100543



上壳 顶出线 Hoods, top entry




螺纹 Thread	型号 Type	订货号 Part Number
M20	HV10B-TE-2B-M20	19340101440
PG16	HV10B-TE-2B-PG16	09340101441



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV10B-TEH-2B-M25	19340100446
M32	HV10B-TEH-2B-M32	19340100447
PG21	HV10B-TEH-2B-PG21	09340100442
PG29	HV10B-TEH-2B-PG29	09340100443



飞线下壳 Housings, cable to cable




螺纹 Thread	型号 Type	订货号 Part Number
M20	HV10B-CCT-1L-M20	19340101750
PG16	HV10B-CCT-1L-PG16	09340101751



飞线下壳 高结构 Housings, cable to cable, high construction



螺纹 Thread	型号 Type	订货号 Part Number
M25	HV10B-CCTH-1L-M25	19340100756
M32	HV10B-CCTH-1L-M32	19340100757
PG21	HV10B-CCTH-1L-PG21	09340100752
PG29	HV10B-CCTH-1L-PG29	09340100753




HV10B 金属外壳 用于高电压插芯 (HVE系列) Metal Hoods & Housings- For High Voltage Inserts(HVE Series)

防护等级 Degree of protection : IP65

不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	HV10B-BK-1L	09340100305
---	带塑料盖 With plastic cover	
---	HV10B-BK-1L-CV	09340100303
---	带金属盖 With metal cover	
---	HV10B-BK-1L-MCV	09340100318



封底下壳 Housings, surface mounting




螺纹 Thread	型号 Type	订货号 Part Number
M20	HV10B-SF-1L-M20	19340101250
2M20	HV10B-SF-1L-2M20	19340101290
M25	HV10B-SF-1L-M25	19340101251
2M25	HV10B-SF-1L-2M25	19340101291
PG16	HV10B-SF-1L-PG16	09340101251
2PG16	HV10B-SF-1L-2PG16	09340101291
	带塑料盖 With plastic cover	
M20	HV10B-SF-1L-CV-M20	19340101255
2M20	HV10B-SF-1L-CV-2M20	19340101295
M25	HV10B-SF-1L-CV-M25	19340101256
2M25	HV10B-SF-1L-CV-2M25	19340101296
PG16	HV10B-SF-1L-CV-PG16	09340101256
2PG16	HV10B-SF-1L-CV-2PG16	09340101296
	带金属盖 With metal cover	
M20	HV10B-SF-1L-MCV-M20	19340102255
2M20	HV10B-SF-1L-MCV-2M20	19340102295
M25	HV10B-SF-1L-MCV-M25	19340102256
2M25	HV10B-SF-1L-MCV-2M25	19340102296
PG16	HV10B-SF-1L-MCV-PG16	09340102256
2PG16	HV10B-SF-1L-MCV-2PG16	09340102296



封底下壳 高结构 Housings, surface mounting, high construction



螺纹 Thread	型号 Type	订货号 Part Number
M25	HV10B-SFH-1L-M25	19340100291
2M25	HV10B-SFH-1L-2M25	19340100391
M32	HV10B-SFH-1L-M32	19340100292
2M32	HV10B-SFH-1L-2M32	19340100392
PG21	HV10B-SFH-1L-PG21	09340100192
2PG21	HV10B-SFH-1L-2PG21	09340100292
PG29	HV10B-SFH-1L-PG29	09340100193
2PG29	HV10B-SFH-1L-2PG29	09340100293
	带塑料盖 With plastic cover	
M25	HV10B-SFH-1L-CV-M25	19340100196
2M25	HV10B-SFH-1L-CV-2M25	19340100296
M32	HV10B-SFH-1L-CV-M32	19340100197
2M32	HV10B-SFH-1L-CV-2M32	19340100297
PG21	HV10B-SFH-1L-CV-PG21	09340100197
2PG21	HV10B-SFH-1L-CV-2PG21	09340100297
PG29	HV10B-SFH-1L-CV-PG29	09340100198
2PG29	HV10B-SFH-1L-CV-2PG29	09340100298
	带金属盖 With metal cover	
M25	HV10B-SFH-1L-MCV-M25	19340107295
2M25	HV10B-SFH-1L-MCV-2M25	19340107296
M32	HV10B-SFH-1L-MCV-M32	19340107297
2M32	HV10B-SFH-1L-MCV-2M32	19340107298
PG21	HV10B-SFH-1L-MCV-PG21	09340102197
2PG21	HV10B-SFH-1L-MCV-2PG21	09340102297
PG29	HV10B-SFH-1L-MCV-PG29	09340102198
2PG29	HV10B-SFH-1L-MCV-2PG29	09340102298




HV10B 金属外壳 用于高电压插芯 (HVE系列) Metal Hoods & Housings- For High Voltage Inserts(HVE Series)

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M20	HV10B-SE-4B-M20	19340100520
PG16	HV10B-SE-4B-PG16	09340100521



上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV10B-SEH-4B-M25	19340100551
M32	HV10B-SEH-4B-M32	19340100552
PG21	HV10B-SEH-4B-PG21	09340100552
PG29	HV10B-SEH-4B-PG29	09340100553



上壳 顶出线 Hoods, top entry




螺纹 Thread	型号 Type	订货号 Part Number
M20	HV10B-TE-4B-M20	19340100420
M25	HV10B-TE-4B-M25	19340100421
PG16	HV10B-TE-4B-PG16	09340100421



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV10B-TEH-4B-M25	19340100451
M32	HV10B-TEH-4B-M32	19340100452
PG21	HV10B-TEH-4B-PG21	09340100452
PG29	HV10B-TEH-4B-PG29	09340100453



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	HV10B-BK-2L	09340100301



封底下壳 Housings, surface mounting



螺纹 Thread	型号 Type	订货号 Part Number
M20	HV10B-SF-2L-M20	19340100270
2M20	HV10B-SF-2L-2M20	19340100275
M25	HV10B-SF-2L-M25	19340100271
2M25	HV10B-SF-2L-2M25	19340100276
PG16	HV10B-SF-2L-PG16	09340100271
2PG16	HV10B-SF-2L-2PG16	09340100276




HV10B 金属外壳 用于高电压插芯 (HVE系列) Metal Hoods & Housings- For High Voltage Inserts(HVE Series)

防护等级 Degree of protection : IP65

封底下壳 高结构 Housings, surface mounting, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV10B-SFH-2L-M25	19340100231
2M25	HV10B-SFH-2L-2M25	19340100276
M32	HV10B-SFH-2L-M32	19340100232
2M32	HV10B-SFH-2L-2M32	19340100272
PG21	HV10B-SFH-2L-PG21	09340100232
2PG21	HV10B-SFH-2L-2PG21	09340100272
PG29	HV10B-SFH-2L-PG29	09340100233
2PG29	HV10B-SFH-2L-2PG29	09340100273

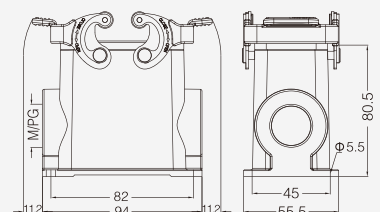

飞线下壳 Housings, cable to cable




螺纹 Thread	型号 Type	订货号 Part Number
M20	HV10B-CCT-2L-M20	19340100730
M25	HV10B-CCT-2L-M25	19340100731
PG16	HV10B-CCT-2L-PG16	09340101731

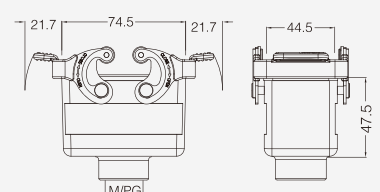

飞线下壳 高结构 Housings, cable to cable, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV10B-CCTH-2L-M25	19340100736
M32	HV10B-CCTH-2L-M32	19340100737
PG21	HV10B-CCTH-2L-PG21	09340100732
PG29	HV10B-CCTH-2L-PG29	09340100733

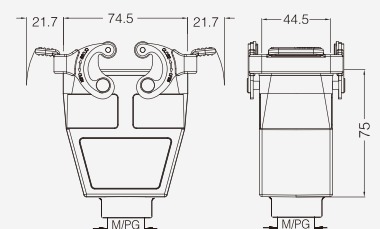

塑料防护盖 4卡扣 Protection covers, plastic




接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number
---	用于上壳 For hoods	H10B-CV-4C	09340105401



塑料防护盖 Protection covers, plastic



接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number
	塑料盖/用于飞线下壳 For Housings, cable to cable	H10B-CV-4B/1	09300105426
	塑料盖/用于不封底,封底下壳 For housing, bulkhead/surface mounting	H10B-CV-4B/2	09300105428




HV10B 金属外壳 用于高电压插芯 (HVE系列) Metal Hoods & Housings- For High Voltage Inserts(HVE Series)

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M20	HV10B-SE-2L-M20	19340101530
PG16	HV10B-SE-2L-PG16	09340101531

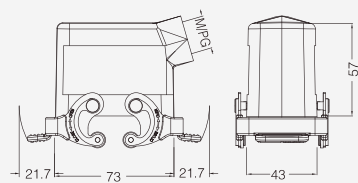

上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV10B-SEH-2L-M25	19340100536
M32	HV10B-SEH-2L-M32	19340100537
PG21	HV10B-SEH-2L-PG21	09340100532
PG29	HV10B-SEH-2L-PG29	09340100533

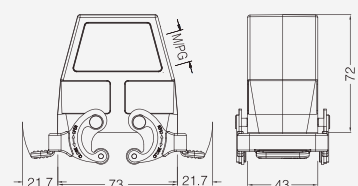

上壳 顶出线 Hoods, top entry




螺纹 Thread	型号 Type	订货号 Part Number
M20	HV10B-TE-2L-M20	19340101430
PG16	HV10B-TE-2L-PG16	09340101431

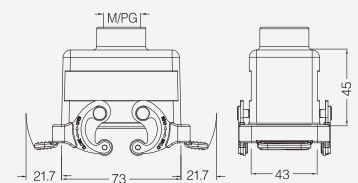

上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV10B-TEH-2L-M25	19340100436
M32	HV10B-TEH-2L-M32	19340100437
PG21	HV10B-TEH-2L-PG21	09340100432
PG29	HV10B-TEH-2L-PG29	09340100433

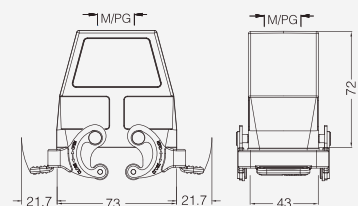

不封底下壳 Housings, bulkhead mounting



螺纹 Thread	型号 Type	订货号 Part Number
---	HV10B-BK-4B	09300100300
---	带塑料盖 With plastic cover	
---	HV10B-BK-4B-CV	09340100302
---	带金属盖 With metal cover	
---	HV10B-BK-4B-MCV	09340100317

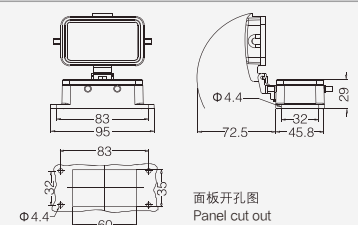


HV10B 金属外壳 用于高电压插芯 (HVE系列) Metal Hoods & Housings- For High Voltage Inserts(HVE Series)

防护等级 Degree of protection : IP65

封底下壳 Housings, surface mounting




螺纹 Thread	型号 Type	订货号 Part Number
M20	HV10B-SF-4B-M20	19340101125
2M20	HV10B-SF-4B-2M20	19340101165
M25	HV10B-SF-4B-M25	19340101126
2M25	HV10B-SF-4B-2M25	19340101166
PG16	HV10B-SF-4B-PG16	09340101121
2PG16	HV10B-SF-4B-2PG16	09340101161
带塑料盖 With plastic cover		
M20	HV10B-SF-4B-CV-M20	19340101225
2M20	HV10B-SF-4B-CV-2M20	19340101265
M25	HV10B-SF-4B-CV-M25	19340101226
2M25	HV10B-SF-4B-CV-2M25	19340101266
PG16	HV10B-SF-4B-CV-PG16	09340101221
2PG16	HV10B-SF-4B-CV-2PG16	09340101261
带金属盖 With metal cover		
M20	HV10B-SF-4B-MCV-M20	19340102225
2M20	HV10B-SF-4B-MCV-2M20	19340102265
M25	HV10B-SF-4B-MCV-M25	19340102226
2M25	HV10B-SF-4B-MCV-2M25	19340102266
PG16	HV10B-SF-4B-MCV-PG16	09340102221
2PG16	HV10B-SF-4B-MCV-2PG16	09340102261

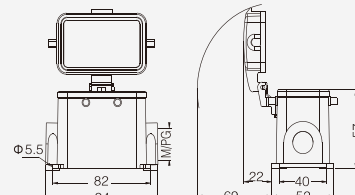

封底下壳 高结构 Housings, surface mounting, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV10B-SFH-4B-M25	19340100126
2M25	HV10B-SFH-4B-2M25	19340100166
M32	HV10B-SFH-4B-M32	19340100127
2M32	HV10B-SFH-4B-2M32	19340100167
PG21	HV10B-SFH-4B-PG21	09340100122
2PG21	HV10B-SFH-4B-2PG21	09340100162
PG29	HV10B-SFH-4B-PG29	09340100123
2PG29	HV10B-SFH-4B-2PG29	09340100163
带塑料盖 With plastic cover		
M25	HV10B-SFH-4B-CV-M25	19340100226
2M25	HV10B-SFH-4B-CV-2M25	19340100266
M32	HV10B-SFH-4B-CV-M32	19340100227
2M32	HV10B-SFH-4B-CV-2M32	19340100267
PG21	HV10B-SFH-4B-CV-PG21	09340100222
2PG21	HV10B-SFH-4B-CV-2PG21	09340100262
PG29	HV10B-SFH-4B-CV-PG29	09340100223
2PG29	HV10B-SFH-4B-CV-2PG29	09340100263
带金属盖 With metal cover		
M25	HV10B-SFH-4B-MCV-M25	19340102226
2M25	HV10B-SFH-4B-MCV-2M25	19340102266
M32	HV10B-SFH-4B-MCV-M32	19340102227
2M32	HV10B-SFH-4B-MCV-2M32	19340102267
PG21	HV10B-SFH-4B-MCV-PG21	09340102222
2PG21	HV10B-SFH-4B-MCV-2PG21	09340102262
PG29	HV10B-SFH-4B-MCV-PG29	09340102223
2PG29	HV10B-SFH-4B-MCV-2PG29	09340102263

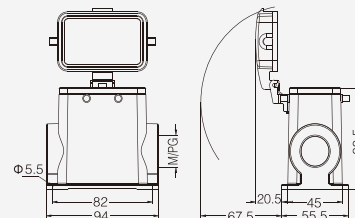

防护盖 Protection covers, metal




接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number
	金属盖/用于上壳 For hoods	H10B-MCV-4B/1	09340105457
	金属盖/用于下壳 For housings	H10B-MCV-4B/2	09340105458



防护盖 Protection covers, metal



接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number
	金属盖/用于上壳 For hoods	H10B-MCV-2L.1S	09340105423
	金属盖/用于下壳 For housings	H10B-MCV-2L.2S	09340105424




16B 塑料外壳 Plastic Hoods & Housings

防护等级 Degree of protection : IP65

上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	H16B.P-SEH-4B-M32	19300160111
M40	H16B.P-SEH-4B-M40	19300160112



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	H16B.P-TEH-4B-M32	19300160121
M40	H16B.P-TEH-4B-M40	19300160122



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	H16B.P-BK-2L	09300160300



封底下壳 高结构 Housings, surface mounting, high construction



螺纹 Thread	型号 Type	订货号 Part Number
M32	H16B.P-SFH-2L-M32	19300160132
2M32	H16B.P-SFH-2L-2M32	19300160136
M40	H16B.P-SFH-2L-M40	19300160133
2M40	H16B.P-SFH-2L-2M40	19300160137



防护盖 Protection covers, metal




螺纹 Thread	型号 Type	订货号 Part Number
---	H16B.P-CV-4B/2	09300160140



防护盖 Protection covers, metal



螺纹 Thread	型号 Type	订货号 Part Number
---	H16B.P-CV-2L/1	09300160145




16B金属外壳 Metal Hoods & Housings

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M25	H16B-SE-2B-M25	19300161541
M32	H16B-SE-2B-M32	19300161542
PG21	H16B-SE-2B-PG21	09300161540



上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	H16B-SEH-2B-M32	19300160547
M40	H16B-SEH-2B-M40	19300160548
PG21	H16B-SEH-2B-PG21	09300160540
PG29	H16B-SEH-2B-PG29	09300160541



上壳 顶出线 Hoods, top entry




螺纹 Thread	型号 Type	订货号 Part Number
M25	H16B-TE-2B-M25	19300161441
M32	H16B-TE-2B-M32	19300161442
PG21	H16B-TE-2B-PG21	09300161440



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	H16B-TEH-2B-M32	19300160447
M40	H16B-TEH-2B-M40	19300160448
PG21	H16B-TEH-2B-PG21	09300160440
PG29	H16B-TEH-2B-PG29	09300160441



飞线下壳 Housings, cable to cable




螺纹 Thread	型号 Type	订货号 Part Number
M25	H16B-CCT-1L-M25	19300161751
M32	H16B-CCT-1L-M32	19300161752
PG21	H16B-CCT-1L-PG21	09300161750



飞线下壳 高结构 Housings, cable to cable, high construction



螺纹 Thread	型号 Type	订货号 Part Number
M32	H16B-CCTH-1L-M32	19300160757
M40	H16B-CCTH-1L-M40	19300160758
PG21	H16B-CCTH-1L-PG21	09300160750
PG29	H16B-CCTH-1L-PG29	09300160751




16B 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection : IP65

不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	H16B-BK-1L	09300160307
---	带塑料盖 With plastic cover	
---	H16B-BK-1L-CV	09300160306
---	带金属盖 With metal cover	
---	H16B-BK-1L-MCV	09300160318



封底下壳 Housings, surface mounting




螺纹 Thread	型号 Type	订货号 Part Number
M25	H16B-SF-1L-M25	19300161251
2M25	H16B-SF-1L-2M25	19300161291
PG21	H16B-SF-1L-PG21	09300161250
2PG21	H16B-SF-1L-2PG21	09300161290
	带塑料盖 With plastic cover	
M25	H16B-SF-1L-CV-M25	19300161256
2M25	H16B-SF-1L-CV-2M25	19300161296
PG21	H16B-SF-1L-CV-PG21	09300161255
2PG21	H16B-SF-1L-CV-2PG21	09300161295
	带金属盖 With metal cover	
M25	H16B-SF-1L-MCV-M25	19300162256
2M25	H16B-SF-1L-MCV-2M25	19300162296
PG21	H16B-SF-1L-MCV-PG21	09300162255
2PG21	H16B-SF-1L-MCV-2PG21	09300162295



封底下壳 高结构 Housings, surface mounting, high construction



螺纹 Thread	型号 Type	订货号 Part Number
M32	H16B-SFH-1L-M32	19300160252
2M25	H16B-SFH-1L-2M25	19300160291
2M32	H16B-SFH-1L-2M32	19300160292
PG21	H16B-SFH-1L-PG21	09300160250
2PG21	H16B-SFH-1L-2PG21	09300160290
PG29	H16B-SFH-1L-PG29	09300160251
2PG29	H16B-SFH-1L-2PG29	09300160291
	带塑料盖 With plastic cover	
M32	H16B-SFH-1L-CV-M32	19300160257
2M32	H16B-SFH-1L-CV-2M32	19300160297
PG21	H16B-SFH-1L-CV-PG21	09300160255
2PG21	H16B-SFH-1L-CV-2PG21	09300160295
PG29	H16B-SFH-1L-CV-PG29	09300160256
2PG29	H16B-SFH-1L-CV-2PG29	09300160296
	带金属盖 With metal cover	
M32	H16B-SFH-1L-MCV-M32	19300167257
2M32	H16B-SFH-1L-MCV-2M32	19300167297
PG21	H16B-SFH-1L-MCV-PG21	09300162257
2PG21	H16B-SFH-1L-MCV-2PG21	09300162297
PG29	H16B-SFH-1L-MCV-PG29	09300162258
2PG29	H16B-SFH-1L-MCV-2PG29	09300162298




16B金属外壳 Metal Hoods & Housings

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M25	H16B-SE-4B-M25	19300161521
M32	H16B-SE-4B-M32	19300161522
PG21	H16B-SE-4B-PG21	09300161520



上壳 侧出线 高结构 Hoods, side entry, high construction



螺纹 Thread	型号 Type	订货号 Part Number
M25	H16B-SEH-4B-M25	19300160526
M32	H16B-SEH-4B-M32	19300160527
M40	H16B-SEH-4B-M40	19300160528
PG21	H16B-SEH-4B-PG21	09300160520
PG29	H16B-SEH-4B-PG29	09300160521




我司可提供顶部、侧面同时出线的非标品, 详见P17-08
We can provide non-standard products with both top&side entry, see P17-08

上壳 顶出线 Hoods, top entry




螺纹 Thread	型号 Type	订货号 Part Number
M25	H16B-TE-4B-M25	19300161421
M32	H16B-TE-4B-M32	19300161422
PG21	H16B-TE-4B-PG21	09300161420



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	H16B-TEH-4B-M32	19300160427
M40	H16B-TEH-4B-M40	19300160428
PG21	H16B-TEH-4B-PG21	09300160420
PG29	H16B-TEH-4B-PG29	09300160421
2M25	H16B-TEH-4B-2M25	19300160466
2PG16	H16B-TEH-4B-2PG16	09300160461
2PG21	H16B-TEH-4B-2PG21	09300160462



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	H16B-BK-2L	09300160301



封底下壳 Housings, surface mounting



螺纹 Thread	型号 Type	订货号 Part Number
M25	H16B-SF-2L-M25	19300161231
2M25	H16B-SF-2L-2M25	19300161271
PG21	H16B-SF-2L-PG21	09300161230
2PG21	H16B-SF-2L-2PG21	09300161270




16B 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection : IP65

封底下壳 高结构 Housings, surface mounting, high construction




螺纹 Thread	型号 Type	订货号 Part Number
2M25	H16B-SFH-2L-2M25	19300160271
M32	H16B-SFH-2L-M32	19300160232
2M32	H16B-SFH-2L-2M32	19300160272
2M40	H16B-SFH-2L-2M40	19300160273
PG21	H16B-SFH-2L-PG21	09300160230
2PG21	H16B-SFH-2L-2PG21	09300160270
PG29	H16B-SFH-2L-PG29	09300160231
2PG29	H16B-SFH-2L-2PG29	09300160271



飞线下壳 Housings, cable to cable




螺纹 Thread	型号 Type	订货号 Part Number
M25	H16B-CCT-2L-M25	19300161731
M32	H16B-CCT-2L-M32	19300161732
PG21	H16B-CCT-2L-PG21	09300161730



飞线下壳 高结构 Housings, cable to cable, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	H16B-CCTH-2L-M25	19300160736
M32	H16B-CCTH-2L-M32	19300160737
M40	H16B-CCTH-2L-M40	19300160738
PG21	H16B-CCTH-2L-PG21	09300160730
PG29	H16B-CCTH-2L-PG29	09300160731



塑料防护盖 4卡扣 Protection covers, plastic




接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number
---	用于上壳	H16B-CV-4C	09300165401



塑料防护盖 Protection covers, plastic



接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number
	塑料盖/用于飞线下壳 For Housings, cable to cable	H16B-CV-4B/1	09300165427
	塑料盖/用于不封底,封底下壳 For housing, bulkhead/ surface mounting	H16B-CV-4B/2	09300165428




16B金属外壳 Metal Hoods & Housings

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M25	H16B-SE-2L-M25	19300161531
M32	H16B-SE-2L-M32	19300161532
PG21	H16B-SE-2L-PG21	09300161530



上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	H16B-SEH-2L-M25	19300160536
M32	H16B-SEH-2L-M32	19300160537
M40	H16B-SEH-2L-M40	19300160538
PG21	H16B-SEH-2L-PG21	09300160530
PG29	H16B-SEH-2L-PG29	09300160531



上壳 顶出线 Hoods, top entry




螺纹 Thread	型号 Type	订货号 Part Number
M25	H16B-TE-2L-M25	19300161431
M32	H16B-TE-2L-M32	19300161432
PG21	H16B-TE-2L-PG21	09300161430



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	H16B-TEH-2L-M32	19300160437
M40	H16B-TEH-2L-M40	19300160438
PG21	H16B-TEH-2L-PG21	09300160430
PG29	H16B-TEH-2L-PG29	09300160431



不封底下壳 Housings, bulkhead mounting



螺纹 Thread	型号 Type	订货号 Part Number
---	H16B-BK-4B	09300160300
---	带塑料盖 With plastic cove	
---	H16B-BK-4B-CV	09300160302
---	带金属盖 With metal cover	
---	H16B-BK-4B-MCV	09300160317




16B 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection : IP65

封底下壳 Housings, surface mounting




螺纹 Thread	型号 Type	订货号 Part Number
M25	H16B-SF-4B-M25	19300161126
2M25	H16B-SF-4B-2M25	19300161166
PG21	H16B-SF-4B-PG21	09300161120
2PG21	H16B-SF-4B-2PG21	09300161160
带塑料盖 With plastic cover		
M25	H16B-SF-4B-CV-M25	19300161226
2M25	H16B-SF-4B-CV-2M25	19300161266
PG21	H16B-SF-4B-CV-PG21	09300161220
2PG21	H16B-SF-4B-CV-2PG21	09300161260
带金属盖 With metal cover		
M25	H16B-SF-4B-MCV-M25	19300162226
2M25	H16B-SF-4B-MCV-2M25	19300162266
PG21	H16B-SF-4B-MCV-PG21	09300162220
2PG21	H16B-SF-4B-MCV-2PG21	09300162260

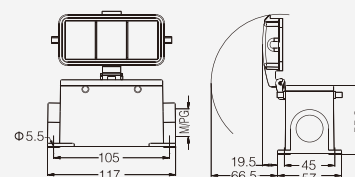

封底下壳 高结构 Housings, surface mounting, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	H16B-SFH-4B-M32	19300160127
M32	H16B-SFH-4B-2M32	19300160167
M40	H16B-SFH-4B-PG21	09300160120
PG21	H16B-SFH-4B-2PG21	09300160160
PG29	H16B-SFH-4B-PG29	09300160121
2PG29	H16B-SFH-4B-2PG29	09300160161
带塑料盖 With plastic cover		
M32	H16B-SFH-4B-CV-M32	19300160227
2M32	H16B-SFH-4B-CV-2M32	19300160267
PG21	H16B-SFH-4B-CV-PG21	09300160220
2PG21	H16B-SFH-4B-CV-2PG21	09300160260
PG29	H16B-SFH-4B-CV-PG29	09300160221
2PG29	H16B-SFH-4B-CV-2PG29	09300160261
带金属盖 With metal cover		
M32	H16B-SFH-4B-MCV-M32	19300160327
2M32	H16B-SFH-4B-MCV-2M32	19300160367
PG21	H16B-SFH-4B-MCV-PG21	09300160320
2PG21	H16B-SFH-4B-MCV-2PG21	09300160360
PG29	H16B-SFH-4B-MCV-PG29	09300160321
2PG29	H16B-SFH-4B-MCV-2PG29	09300160361

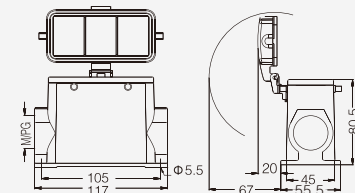

防护盖 Protection covers, metal




接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number
	金属盖/用于上壳 For hoods	H16B-MCV-4B/1	09300165426
	金属盖/用于下壳 For housings	H16B-MCV-4B/2	09300165425




防护盖 Protection covers, metal



接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number
	金属盖/用于上壳 For hoods	H16B-MCV-2L.1S	09300165422
	金属盖/用于下壳 For housings	H16B-MCV-2L.2S	09300165423



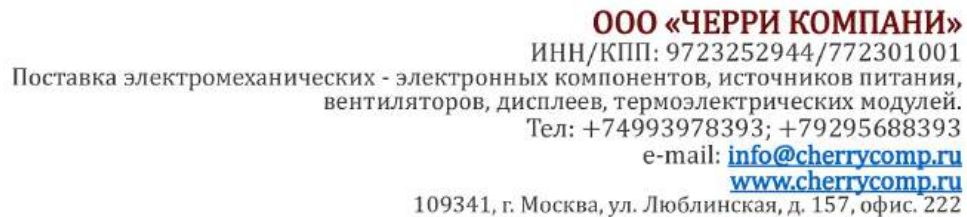

防护等级 Degree of protection : IP65

上壳 侧出线 高结构 Hoods, side entry, high construction



不封底下壳 Housings, bulkhead mounting



面板开孔图
Panel cut out

上壳侧出线/顶出线 高结构 Hoods,side&top entry,high construction



型号为:H16B-SEH/TEH-4B-XX/XX
如有需要请与我司联系


16B 金属外壳 适用于苛刻环境(耐腐蚀) Metal Hoods & Housings For higher environmental requirements

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M25	H16B-MSE-4B-M25	19370161521
PG21	H16B-MSE-4B-PG21	09370161520



上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	H16B-MSEH-4B-M32	19370160527
M40	H16B-MSEH-4B-M40	19370160528
PG29	H16B-MSEH-4B-PG29	09370160521



上壳 顶出线 Hoods, top entry




螺纹 Thread	型号 Type	订货号 Part Number
M25	H16B-MTE-4B-M25	19370161421
PG21	H16B-MTE-4B-PG21	09370161420



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	H16B-MTEH-4B-M32	19370160427
PG29	H16B-MTEH-4B-PG29	09370160421



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	H16B-MBK-2L	09370160301



封底下壳 Housings, surface mounting



螺纹 Thread	型号 Type	订货号 Part Number
M25	H16B-MSF-2L-M25	19370161231
PG21	H16B-MSF-2L-PG21	09370161230




16B 金属外壳 适用于苛刻环境(耐腐蚀) Metal Hoods & Housings For higher environmental requirements

防护等级 Degree of protection : IP65

封底下壳 高结构 Housings, surface mounting, high construction




螺纹 Thread	型号 Type	订货号 Part Number
2M32	H16B-MSFH-2L-2M32	19370160272
2M40	H16B-MSFH-2L-2M40	19370160273
2PG29	H16B-MSFH-2L-2PG29	09370160271



飞线下壳 Housings, cable to cable




螺纹 Thread	型号 Type	订货号 Part Number
PG21	H16B-MCCT-2L-PG21	09370161730



防护盖 Protection covers, metal




接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number
	金属盖/用于上壳 For hoods	H16B-MMCV-4B/1	09370165404
	金属盖/用于下壳 For housings	H16B-MMCV-4B/2	09370165405



防护盖 Protection covers, metal



接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number
	金属盖/用于上壳 For hoods	H16B-MMCV-2L.1S	09370165402
	金属盖/用于下壳 For housings	H16B-MMCV-2L.2S	09370165403




防护等级 Degree of protection : IP65

上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	H16B-MSEH-1L-M32	19370160587
PG21	H16B-MSEH-1L-PG21	09370160587
PG29	H16B-MSEH-1L-PG29	09370160588



不封底下壳 Housings, bulkhead mounting



螺纹 Thread	型号 Type	订货号 Part Number
---	H16B-MBK-2B/C	09370160381




16B 高防护外壳 Hoods & Housings For Harsh Environmental Requirements

防护等级 Degree of protection : IP68

上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	HP16B-SEH-2S-M25	19400160211
M32	HP16B-SEH-2S-M32	19400160212
M40	HP16B-SEH-2S-M40	19400160213
PG21	HP16B-SEH-2S-PG21	09400160212
PG29	HP16B-SEH-2S-PG29	09400160213



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	HP16B-TEH-2S-M25	19400160221
M32	HP16B-TEH-2S-M32	19400160222
M40	HP16B-TEH-2S-M40	19400160223
M50	HP16B-TEH-2S-M50	19400160224
PG21	HP16B-TEH-2S-PG21	09400160222
PG29	HP16B-TEH-2S-PG29	09400160223



封底下壳 Housings, surface mounting




螺纹 Thread	型号 Type	订货号 Part Number
M25	HP16B-SFH-2H-M25	19400160231
M32	HP16B-SFH-2H-M32	19400160232
M40	HP16B-SFH-2H-M40	19400160233
PG21	HP16B-SFH-2H-PG21	09400160232
PG29	HP16B-SFH-2H-PG29	09400160233



不封底下壳 Housings, bulkhead mounting



螺纹 Thread	型号 Type	订货号 Part Number
---	HP16B-BK-2H	09400160201




16B 高防护外壳 Hoods & Housings For Harsh Environmental Requirements

防护等级 Degree of protection : IP68

上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
	螺栓联锁Screw locking	
M25	HP16B/H-SEH-2S-M25	19400160511
M32	HP16B/H-SEH-2S-M32	19400160512
M40	HP16B/H-SEH-2S-M40	19400160513
M50	HP16B/H-SEH-2S-M50	19400160514
PG21	HP16B/H-SEH-2S-PG21	09400160512
PG29	HP16B/H-SEH-2S-PG29	09400160513
PG36	HP16B/H-SEH-2S-PG36	09400160514
	轴销联锁Toggle locking	
M25	HP16B/H-SEH-2T-M25	19400160501
M32	HP16B/H-SEH-2T-M32	19400160502
M40	HP16B/H-SEH-2T-M40	19400160503
PG21	HP16B/H-SEH-2T-PG21	09400160502
PG29	HP16B/H-SEH-2T-PG29	09400160503
PG36	HP16B/H-SEH-2T-PG36	09400160504



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
	螺栓联锁Screw locking	
M25	HP16B/H-TEH-2S-M25	19400160411
M32	HP16B/H-TEH-2S-M32	19400160412
M40	HP16B/H-TEH-2S-M40	19400160413
M50	HP16B/H-TEH-2S-M50	19400160414
PG21	HP16B/H-TEH-2S-PG21	09400160412
PG29	HP16B/H-TEH-2S-PG29	09400160413
PG36	HP16B/H-TEH-2S-PG36	09400160414
	轴销联锁Toggle locking	
M25	HP16B/H-TEH-2T-M25	19400160401
M32	HP16B/H-TEH-2T-M32	19400160402
M40	HP16B/H-TEH-2T-M40	19400160403
M50	HP16B/H-TEH-2T-M50	19400160404
PG21	HP16B/H-TEH-2T-PG21	09400160402
PG29	HP16B/H-TEH-2T-PG29	09400160403
PG36	HP16B/H-TEH-2T-PG36	09400160404



封底下壳 高结构 Housings, surface mounting, high construction




螺纹 Thread	型号 Type	订货号 Part Number
	螺栓联锁Screw locking	
M25	HP16B/H-SFH-2H-M25	19400161261
M32	HP16B/H-SFH-2H-M32	19400161262
M40	HP16B/H-SFH-2H-M40	19400161263
PG21	HP16B/H-SFH-2H-PG21	09400161261
PG29	HP16B/H-SFH-2H-PG29	09400161262
PG36	HP16B/H-SFH-2H-PG36	09400161263
	轴销联锁Toggle locking	
M25	HP16B/H-SFH-2T-M25	19400161281
M32	HP16B/H-SFH-2T-M32	19400161282
M40	HP16B/H-SFH-2T-M40	19400161283
PG21	HP16B/H-SFH-2T-PG21	09400161282
PG29	HP16B/H-SFH-2T-PG29	09400161283




16B 高防护外壳 Hoods & Housings For Harsh Environmental Requirements

防护等级 Degree of protection : IP68


不封底下壳 Housings, bulkhead mounting

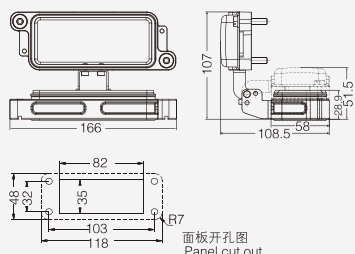	螺纹 Thread	型号 Type	订货号 Part Number	
	---	螺栓联锁 Screw locking		
	---	HP16B/H-BK-2H	09400160311	
	---	轴销联锁 Toggle locking		
	---	HP16B/H-BK-2T	09400160301	
	---	带金属盖 With metal cover		
	---	螺栓联锁 Screw locking		
	---	HP16B/H-BK-2H-MCV	09400160317	
	---	轴销联锁 Toggle locking		
	---	HP16B/H-BK-2T-MCV	09400160307	


防护盖 Protection covers, metal

	螺纹 Thread	型号 Type	订货号 Part Number	
	---	螺栓联锁 Screw locking		
	---	HP16B/H-MCV-2S	09400165411	
	---	轴销联锁 Toggle locking		
	---	HP16B/H-MCV-2T	09400165401	


上壳 侧出线 高结构 Hoods, side entry, high construction

	螺纹 Thread	型号 Type	订货号 Part Number	
	M25	HP16B/H-SEH-4S-M25	19400161361	
	M32	HP16B/H-SEH-4S-M32	19400161362	
	M40	HP16B/H-SEH-4S-M40	19400161363	
	PG21	HP16B/H-SEH-4S-PG21	09400161362	
	PG29	HP16B/H-SEH-4S-PG29	09400161363	

上壳 顶出线 高结构 Hoods, top entry, high construction

	螺纹 Thread	型号 Type	订货号 Part Number	
	M25	HP16B/H-TEH-4S-M25	19400161461	
	M32	HP16B/H-TEH-4S-M32	19400161462	
	M40	HP16B/H-TEH-4S-M40	19400161463	
	M50	HP16B/H-TEH-4S-M50	19400161464	
	PG21	HP16B/H-TEH-4S-PG21	09400161461	
	PG29	HP16B/H-TEH-4S-PG29	09400161462	
	PG36	HP16B/H-TEH-4S-PG36	09400161463	

不封底下壳 Housings, bulkhead mounting

	螺纹 Thread	型号 Type	订货号 Part Number	
	---	HP16B/H-BK-4H	09400160202	


16B 高防护外壳 Hoods & Housings For Harsh Environmental Requirements

防护等级 Degree of protection : IP68

上壳 顶出线 高结构 Hoods, top entry, high construction EMC version




螺纹 Thread	型号 Type	订货号 Part Number
M32	EMC · H16B-TEH-4S-M32	19620160442
M40	EMC · H16B-TEH-4S-M40	19620160443
PG21	EMC · H16B-TEH-4S-PG21	09620160540
PG29	EMC · H16B-TEH-4S-PG29	09620160541



不封底下壳 Housings, bulkhead mounting EMC version




螺纹 Thread	型号 Type	订货号 Part Number
---	EMC · H16B-BK-4H	09620160301



整体型外壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	HC16B-SEH-2S-M32	19400161501
M32	HC16B-SEH-2S-M40	19400161502
PG21	HC16B-SEH-2S-PG21	09400161501
PG29	HC16B-SEH-2S-PG29	09400161502



整体型外壳 顶出线 高结构 Hoods, top entry, high construction




螺线 Thread	型号 Type	订货号 Part Number
M32	HC16B-TEH-2S-M32	19400161551
M40	HC16B-TEH-2S-M40	19400161552
PG21	HC16B-TEH-2S-PG21	09400161551
PG29	HC16B-TEH-2S-PG29	09400161552



芯体安装支块 Mounting frames



螺纹 Thread	型号 Type	订货号 Part Number
---	APT-C	09400161600




HV16B 金属外壳 适用高压插芯(HVE系列) Metal Hoods & Housings For HighVoltage Inserts(HVE Series)

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV16B-SE-2B-M25	19340161541
M32	HV16B-SE-2B-M32	19340161542
PG21	HV16B-SE-2B-PG21	09340161540



上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	HV16B-SEH-2B-M32	19340160547
M40	HV16B-SEH-2B-M40	19340160548
PG21	HV16B-SEH-2B-PG21	09340160540
PG29	HV16B-SEH-2B-PG29	09340160541



上壳 顶出线 Hoods, top entry




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV16B-TE-2B-M25	19340161441
M32	HV16B-TE-2B-M32	19340161442
PG21	HV16B-TE-2B-PG21	09340161440



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	HV16B-TEH-2B-M32	19340160447
M40	HV16B-TEH-2B-M40	19340160448
PG21	HV16B-TEH-2B-PG21	09340160440
PG29	HV16B-TEH-2B-PG29	09340160441



飞线下壳 Housings, cable to cable




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV16B-CCT-1-M25	19340161751
M32	HV16B-CCT-1-M32	19340161752
PG21	HV16B-CCT-1L-PG21	09340161750



飞线下壳 高结构 Housings, cable to cable, high construction



螺纹 Thread	型号 Type	订货号 Part Number
M25	HV16B-CCTH-1L-M32	19340160757
M40	HV16B-CCTH-1L-M40	19340160758
PG21	HV16B-CCTH-1L-PG21	09340160750
PG29	HV16B-CCTH-1L-PG29	09340160751




HV16B 金属外壳 适用高压插芯(HVE系列) Metal Hoods & Housings For HighVoltage Inserts(HVE Series)

防护等级 Degree of protection : IP65

不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	HV16B-BK-1L	09340160307
	带塑料盖 With Plastic Cover	
---	HV16B-BK-1L-CV	09340160306
	带金属盖 With Metal Cover	
---	HV16B-BK-1L-MCV	09340160318



封底下壳 Housings, surface mounting




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV16B-SF-1L-M25	19340161251
2M25	HV16B-SF-1L-2M25	19340161291
PG21	HV16B-SF-1L-PG21	09340161250
2PG21	HV16B-SF-1L-2PG21	09340161290
	带塑料盖 With Plastic Cover	
M25	HV16B-SF-1L-CV-M25	19340161256
2M25	HV16B-SF-1L-CV-2M25	19340161296
PG21	HV16B-SF-1L-CV-PG21	09340161255
2PG21	HV16B-SF-1L-CV-2PG21	09340161295
	带金属盖 With Metal Cover	
M25	HV16B-SF-1L-MCV-M25	19340162256
2M25	HV16B-SF-1L-MCV-2M25	19340162296
PG21	HV16B-SF-1L-MCV-PG21	09340162255
2PG21	HV16B-SF-1L-MCV-2PG21	09340162295



封底下壳 高结构 Housings, surface mounting, high construction



螺纹 Thread	型号 Type	订货号 Part Number
M32	HV16B-SFH-1L-M32	19340160252
2M25	HV16B-SFH-1L-2M25	19340160291
2M32	HV16B-SFH-1L-2M32	19340160292
PG21	HV16B-SFH-1L-PG21	09340160250
2PG21	HV16B-SFH-1L-2PG21	09340160290
PG29	HV16B-SFH-1L-PG29	09340160251
2PG29	HV16B-SFH-1L-2PG29	09340160291
	带塑料盖 With Plastic Cover	
M32	HV16B-SFH-1L-CV-M32	19340160257
2M32	HV16B-SFH-1L-CV-2M32	19340160297
PG21	HV16B-SFH-1L-CV-PG21	09340160255
2PG21	HV16B-SFH-1L-CV-2PG21	09340160295
PG29	HV16B-SFH-1L-CV-PG29	09340160256
2PG29	HV16B-SFH-1L-CV-2PG29	09340160296
	带金属盖 With Metal Cover	
M32	HV16B-SFH-1L-MCV-M32	19340167257
2M32	HV16B-SFH-1L-MCV-2M32	19340167297
PG21	HV16B-SFH-1L-MCV-PG21	09340162257
2PG21	HV16B-SFH-1L-MCV-2PG21	09340162297
PG29	HV16B-SFH-1L-MCV-PG29	09340162258
2PG29	HV16B-SFH-1L-MCV-2PG29	09340162298




HV16B 金属外壳 适用高压插芯(HVE系列) Metal Hoods & Housings For High Voltage Inserts(HVE Series)

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV16B-SE-4B-M25	19340160521
M32	HV16B-SE-4B-M32	19340160522
PG21	HV16B-SE-4B-PG21	09340160522



上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	HV16B-SEH-4B-M32	19340160552
M40	HV16B-SEH-4B-M40	19340160553
PG21	HV16B-SEH-4B-PG21	09340160552
PG29	HV16B-SEH-4B-PG29	09340160553



上壳 顶出线 Hoods, top entry




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV16B-TE-4B-M25	19340160421
PG21	HV16B-TE-4B-PG21	19340160422



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	HV16B-TEH-4B-M32	19340160452
M40	HV16B-TEH-4B-M40	19340160453
PG21	HV16B-TEH-4B-PG21	09340160452
PG29	HV16B-TEH-4B-PG29	09340160453



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	HV16B-BK-2L	09340160301



封底下壳 Housings, surface mounting



螺纹 Thread	型号 Type	订货号 Part Number
M25	HV16B-SF-2L-M25	19340160271
2M25	HV16B-SF-2L-2M25	19340160275
PG21	HV16B-SF-2L-PG21	09340160272
2PG21	HV16B-SF-2L-2PG21	09340160276




HV16B 金属外壳 适用高压插芯(HVE系列) Metal Hoods & Housings For HighVoltage Inserts(HVE Series)

防护等级 Degree of protection : IP65

封底下壳 高结构 Housings, surface mounting, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	HV16B-SFH-2L-M32	19340160232
2M32	HV16B-SFH-2L-2M32	19340160272
PG21	HV16B-SFH-2L-PG21	09340160230
2PG21	HV16B-SFH-2L-2PG21	09340160270
PG29	HV16B-SFH-2L-PG29	09340160231
2PG29	HV16B-SFH-2L-2PG29	09340160271



飞线下壳 Housings, cable to cable




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV16B-CCT-2L-M25	19340160731
M32	HV16B-CCT-2L-M32	19340160732
PG21	HV16B-CCT-2L-PG21	09340160732



飞线下壳 高结构 Housings, cable to cable, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	HV16B-CCTH-2L-M32	19340160737
M40	HV16B-CCTH-2L-M40	19340160738
PG21	HV16B-CCTH-2L-PG21	09340160730
PG29	HV16B-CCTH-2L-PG29	09340160731



塑料防护盖 4卡扣 Protection covers, plastic




接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number
---	用于上壳 For hoods	H16B-CV-4C	09300165401



塑料防护盖 Protection covers, plastic




接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number
	塑料盖/用于飞线下壳 For Housings, cable to cable	H16B-CV-4B/1	09300165427
	塑料盖/用于不封底,封底下壳 For housing, bulkhead/ surface mounting	H16B-CV-4B/2	09300165428




HV16B 金属外壳 适用高压插芯(HVE系列) Metal Hoods & Housings For High Voltage Inserts(HVE Series)

防护等级 Degree of protection : IP65


上壳 侧出线 Hoods, side entry

	螺纹 Thread	型号 Type	订货号 Part Number	
	M25	HV16B-SE-2L-M25	19340161531	
	M32	HV16B-SE-2L-M32	19340161532	
	PG21	HV16B-SE-2L-PG21	09340161530	


上壳 侧出线 高结构 Hoods, side entry, high construction

	螺纹 Thread	型号 Type	订货号 Part Number	
	M32	HV16B-SEH-2L-M32	19340160537	
	M40	HV16B-SEH-2L-M40	19340160538	
	PG21	HV16B-SEH-2L-PG21	09340160530	
	PG29	HV16B-SEH-2L-PG29	09340160531	


上壳 顶出线 Hoods, top entry

	螺纹 Thread	型号 Type	订货号 Part Number	
	M25	HV16B-TE-2L-M25	19340161431	
	M32	HV16B-TE-2L-M32	19340161432	
	PG21	HV16B-TE-2L-PG21	09340161430	

上壳 顶出线 高结构 Hoods, top entry, high construction

	螺纹 Thread	型号 Type	订货号 Part Number	
	M32	HV16B-TEH-2L-M32	19340160437	
	M40	HV16B-TEH-2L-M40	19340160438	
	PG21	HV16B-TEH-2L-PG21	09340160430	
	PG29	HV16B-TEH-2L-PG29	09340160431	

不封底下壳 Housings, bulkhead mounting

	螺纹 Thread	型号 Type	订货号 Part Number	
	---	HV16B-BK-4B	09340160300	
		带塑料盖with plastic cover		
	---	HV16B-BK-4B-CV	09340160302	
		带金属盖with metal cover		
	---	HV16B-BK-4B-MCV	09340160317	


HV16B 金属外壳 适用高压插芯(HVE系列) Metal Hoods & Housings For HighVoltage Inserts(HVE Series)

防护等级 Degree of protection : IP65

封底下壳 Housings, surface mounting




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV16B-SF-4B-M25	19340161126
2M25	HV16B-SF-4B-2M25	19340161166
PG21	HV16B-SF-4B-PG21	09340161120
2PG21	HV16B-SF-4B-2PG21	09340161160
带塑料盖 With Plastic Cover		
M25	HV16B-SF-4B-CV-M25	19340161226
2M25	HV16B-SF-4B-CV-2M25	19340161266
PG21	HV16B-SF-4B-CV-PG21	09340161220
2PG21	HV16B-SF-4B-CV-2PG21	09340161260
带金属盖 With Metal Cover		
M25	HV16B-SF-4B-MCV-M25	19340162226
2M25	HV16B-SF-4B-MCV-2M25	19340162266
PG21	HV16B-SF-4B-MCV-PG21	09340162220
2PG21	HV16B-SF-4B-MCV-2PG21	09340162260

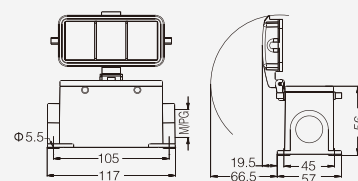

封底下壳 高结构 Housings, surface mounting, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	HV16B-SFH-4B-M32	19340160127
2M32	HV16B-SFH-4B-2M32	19340160167
PG21	HV16B-SFH-4B-PG21	09340160120
2PG21	HV16B-SFH-4B-2PG21	09340160160
PG29	HV16B-SFH-4B-PG29	09340160121
2PG29	HV16B-SFH-4B-2PG29	09340160161
带塑料盖 With Plastic Cover		
M32	HV16B-SFH-4B-CV-M32	19340160227
2M32	HV16B-SFH-4B-CV-2M32	19340160267
PG21	HV16B-SFH-4B-CV-PG21	09340160220
2PG21	HV16B-SFH-4B-CV-2PG21	09340160260
PG29	HV16B-SFH-4B-CV-PG29	09340160221
2PG29	HV16B-SFH-4B-CV-2PG29	09340160261
带金属盖 With Metal Cover		
M32	HV16B-SFH-4B-MCV-M32	19340160327
2M32	HV16B-SFH-4B-MCV-2M32	19340160367
PG21	HV16B-SFH-4B-MCV-PG21	09340160320
2PG21	HV16B-SFH-4B-MCV-2PG21	09340160360
PG29	HV16B-SFH-4B-MCV-PG29	09340160321
2PG29	HV16B-SFH-4B-MCV-2PG29	09340160361

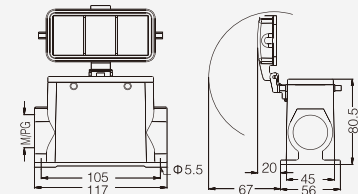

防护盖 Protection covers, metal




接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number
	金属保护盖/用于上壳 For hoods	H16B-MCV-4B/1	09340165426
	金属保护盖/用于下壳 For housings	H16B-MCV-4B/2	09340165425



防护盖 Protection covers, metal



接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number
	金属保护盖/用于上壳 For hoods	H16B-MCV-2L.1S	09340165422
	金属保护盖/用于下壳 For housings	H16B-MCV-2L.2S	09340165423




HV16B 金属外壳 适用高压插芯(HVE系列) Metal Hoods & Housings For High Voltage Inserts(HVE Series)

防护等级 Degree of protection : IP65

上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	HV16B-SEH-1L/C-M32	19340160587
PG21	HV16B-SEH-1L/C-PG21	09340160580
PG29	HV16B-SEH-1L/C-PG29	09340160581



不封底下壳 Housings, bulkhead mounting



螺纹 Thread	型号 Type	订货号 Part Number
---	HV16B-BK-2B/C	09340160381




24B 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M25	H24B-SE-2B-M25	19300241541
M32	H24B-SE-2B-M32	19300241542
PG21	H24B-SE-2B-PG21	09300241540



上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	H24B-SEH-2B-M25	19300240546
M32	H24B-SEH-2B-M32	19300240547
M40	H24B-SEH-2B-M40	19300240548
PG21	H24B-SEH-2B-PG21	09300240540
PG29	H24B-SEH-2B-PG29	09300240541
PG36	H24B-SEH-2B-PG36	09300240546



上壳 顶出线 Hoods, top entry



螺纹 Thread	型号 Type	订货号 Part Number
M25	H24B-TE-2B-M25	19300241441
M32	H24B-TE-2B-M32	19300241442
PG21	H24B-TE-2B-PG21	09300241440
PG29	H24B-TE-2B-PG29	09300241441



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	H24B-TEH-2B-M32	19300240447
M40	H24B-TEH-2B-M40	19300240448
PG21	H24B-TEH-2B-PG21	09300240440
PG29	H24B-TEH-2B-PG29	09300240441
PG36	H24B-TEH-2B-PG36	09300240446



飞线下壳 Housings, cable to cable




螺纹 Thread	型号 Type	订货号 Part Number
M25	H24B-CCT-1L-M25	19300241751
M32	H24B-CCT-1L-M32	19300241752
PG21	H24B-CCT-1L-PG21	09300241750
PG29	H24B-CCT-1L-PG29	09300241751



飞线下壳 高结构 Housings, cable to cable, high construction



螺纹 Thread	型号 Type	订货号 Part Number
M32	H24B-CCTH-1L-M32	19300240757
M40	H24B-CCTH-1L-M40	19300240758
PG21	H24B-CCTH-1L-PG21	09300240750
PG29	H24B-CCTH-1L-PG29	09300240751




24B金属外壳 Metal Hoods & Housings

防护等级 Degree of protection : IP65

不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	H24B-BK-1L	09300240307
---	带塑料盖 With Plastic Cover	
---	H24B-BK-1L-CV	09300240304
---	带金属盖 With Metal Cover	
---	H24B-BK-1L-MCV	09300240318



封底下壳 Housings, surface mounting




螺纹 Thread	型号 Type	订货号 Part Number
M25	H24B-SF-1L-M25	19300241251
2M25	H24B-SF-1L-2M25	19300241291
PG21	H24B-SF-1L-PG21	09300241250
2PG21	H24B-SF-1L-2PG21	09300241290
	带塑料盖 With Plastic Cover	
M25	H24B-SF-1L-CV-M25	19300241256
2M25	H24B-SF-1L-CV-2M25	19300241296
PG21	H24B-SF-1L-CV-PG21	09300241255
2PG21	H24B-SF-1L-CV-2PG21	09300241295
	带金属盖 With Metal Cover	
M25	H24B-SF-1L-MCV-M25	19300242256
2M25	H24B-SF-1L-MCV-2M25	19300242296
PG21	H24B-SF-1L-MCV-PG21	09300242255
2PG21	H24B-SF-1L-MCV-2PG21	09300242295



封底下壳 高结构 Housings, surface mounting, high construction



螺纹 Thread	型号 Type	订货号 Part Number
M32	H24B-SFH-1L-M32	19300240252
2M32	H24B-SFH-1L-2M32	19300240292
M40	H24B-SFH-1L-M40	19300240253
2M40	H24B-SFH-1L-2M40	19300240293
PG21	H24B-SFH-1L-PG21	09300240250
2PG21	H24B-SFH-1L-2PG21	09300240290
PG29	H24B-SFH-1L-PG29	09300240251
2PG29	H24B-SFH-1L-2PG29	09300240291
	带塑料盖 With Plastic Cover	
M32	H24B-SFH-1L-CV-M32	19300240257
2M32	H24B-SFH-1L-CV-2M32	19300240297
PG21	H24B-SFH-1L-CV-PG21	09300240255
2PG21	H24B-SFH-1L-CV-2PG21	09300240295
PG29	H24B-SFH-1L-CV-PG29	09300240256
2PG29	H24B-SFH-1L-CV-2PG29	09300240296
	带金属盖 With Metal Cover	
M32	H24B-SFH-1L-MCV-M32	19300247257
2M32	H24B-SFH-1L-MCV-2M32	19300247297
PG21	H24B-SFH-1L-MCV-PG21	09300242257
2PG21	H24B-SFH-1L-MCV-2PG21	09300242297
PG29	H24B-SFH-1L-MCV-PG29	09300242258
2PG29	H24B-SFH-1L-MCV-2PG29	09300242298




24B 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry



螺纹 Thread	型号 Type	订货号 Part Number
M25	H24B-SE-4B-M25	19300241521
M32	H24B-SE-4B-M32	19300241522
PG21	H24B-SE-4B-PG21	09300241520



上壳 侧出线 高结构 Hoods, side entry, high construction



螺纹 Thread	型号 Type	订货号 Part Number
M25	H24B-SEH-4B-M25	19300240526
M32	H24B-SEH-4B-M32	19300240527
M40	H24B-SEH-4B-M40	19300240528
PG21	H24B-SEH-4B-PG21	09300240520
PG29	H24B-SEH-4B-PG29	09300240521




我司可提供顶部、侧面同时出线的非标品, 详见P18-08
We can provide non-standard products with both top&side entry, see P18-08

上壳 顶出线 Hoods, top entry




螺纹 Thread	型号 Type	订货号 Part Number
M25	H24B-TE-4B-M25	19300241421
M32	H24B-TE-4B-M32	19300241422
PG21	H24B-TE-4B-PG21	09300241420
PG29	H24B-TE-4B-PG29	09300241421



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	H24B-TEH-4B-M32	19300240427
M40	H24B-TEH-4B-M40	19300240428
PG21	H24B-TEH-4B-PG21	09300240420
PG29	H24B-TEH-4B-PG29	09300240421
2M25	H24B-TEH-4B-2M25	19300240466
2M32	H24B-TEH-4B-2M32	19300240467
2PG16	H24B-TEH-4B-2PG16	09300240461
2PG21	H24B-TEH-4B-2PG21	09300240462
2PG29	H24B-TEH-4B-2PG29	09300240463



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	H24B-BK-2L	09300240301



封底下壳 Housings, surface mounting



螺纹 Thread	型号 Type	订货号 Part Number
M25	H24B-SF-2L-M25	19300241231
2M25	H24B-SF-2L-2M25	19300241271
PG21	H24B-SF-2L-PG21	09300241230
2PG21	H24B-SF-2L-2PG21	09300241270




24B金属外壳 Metal Hoods & Housings

防护等级 Degree of protection : IP65

封底下壳 高结构 Housings, surface mounting, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	H24B-SFH-2L-M32	19300240232
2M32	H24B-SFH-2L-2M32	19300240272
M40	H24B-SFH-2L-M40	19300240233
2M40	H24B-SFH-2L-2M40	19300240273
PG21	H24B-SFH-2L-PG21	09300240230
2PG21	H24B-SFH-2L-2PG21	09300240270
PG29	H24B-SFH-2L-PG29	09300240231
2PG29	H24B-SFH-2L-2PG29	09300240271

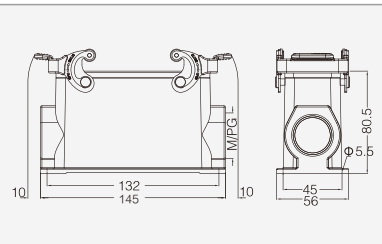

飞线下壳 Housings, cable to cable




螺纹 Thread	型号 Type	订货号 Part Number
M25	H24B-CCT-2L-M25	19300241731
M32	H24B-CCT-2L-M32	19300241732
PG21	H24B-CCT-2L-PG21	09300241730
PG29	H24B-CCT-2L-PG29	09300241731

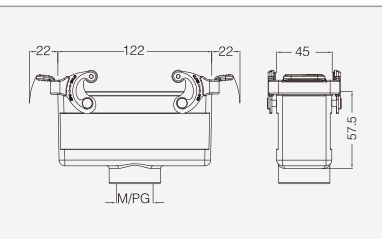

飞线下壳 高结构 Housings, cable to cable, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	H24B-CCTH-2L-M32	19300240737
M40	H24B-CCTH-2L-M40	19300240738
PG21	H24B-CCTH-2L-PG21	09300240730
PG29	H24B-CCTH-2L-PG29	09300240731

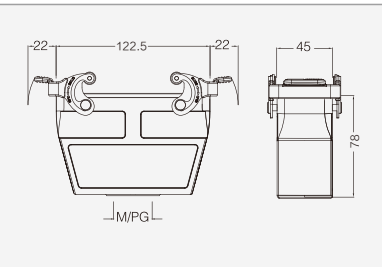

塑料防护盖 4卡扣 Protection covers, plastic




接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number
---	用于上壳 For hoods	H24B-CV-4C	09300245401

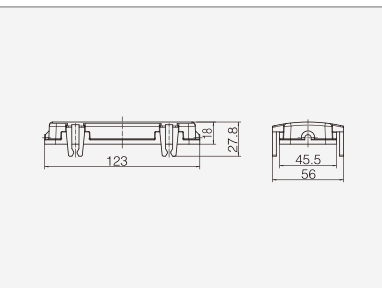

塑料防护盖 Protection covers, plastic



接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number
	塑料盖/用于飞线下壳 For Housings, cable to cable	H24B-CV-4B/1	09300245427
	塑料盖/用于不封底,封底下壳 For housing, bulkhead/ surface mounting	H24B-CV-4B/2	09300245428

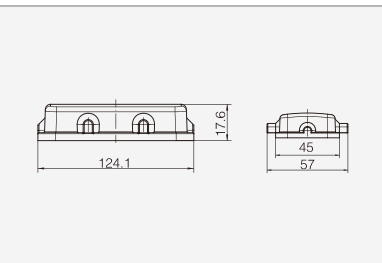


24B 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M25	H24B-SE-2L-M25	19300241531
M32	H24B-SE-2L-M32	19300241532
PG21	H24B-SE-2L-PG21	09300241530



上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	H24B-SEH-2L-M32	19300240537
M40	H24B-SEH-2L-M40	19300240538
PG21	H24B-SEH-2L-PG21	09300240530
PG29	H24B-SEH-2L-PG29	09300240531

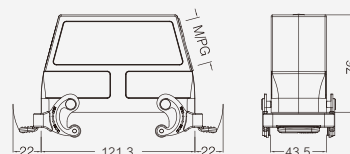

上壳 顶出线 Hoods, top entry




螺纹 Thread	型号 Type	订货号 Part Number
M25	H24B-TE-2L-M25	19300241431
M32	H24B-TE-2L-M32	19300241432
PG21	H24B-TE-2L-PG21	09300241430
PG29	H24B-TE-2L-PG29	09300241431

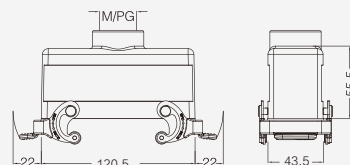

上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	H24B-TEH-2L-M32	19300240437
M40	H24B-TEH-2L-M40	19300240438
PG21	H24B-TEH-2L-PG21	09300240430
PG29	H24B-TEH-2L-PG29	09300240431

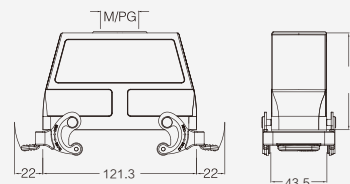

不封底下壳 Housings, bulkhead mounting



螺纹 Thread	型号 Type	订货号 Part Number
---	H24B-BK-4B	09300240300
---	带塑料盖 With Plastic Cover	
---	H24B-BK-4B-CV	09300240302
---	带金属盖 With Metal Cover	
---	H24B-BK-4B-MCV	09300240317

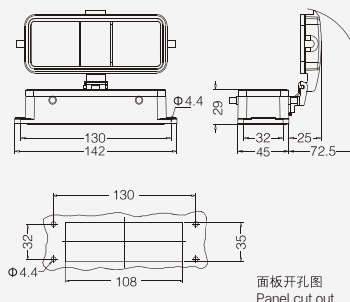


24B金属外壳 Metal Hoods & Housings

防护等级 Degree of protection : IP65

封底下壳 Housings, surface mounting




螺纹 Thread	型号 Type	订货号 Part Number
M25	H24B-SF-4B-M25	19300241126
2M25	H24B-SF-4B-2M25	19300241166
PG21	H24B-SF-4B-PG21	09300241120
2PG21	H24B-SF-4B-2PG21	09300241160
带塑料盖With Plastic Cover		
M25	H24B-SF-4B-CV-M25	19300241226
2M25	H24B-SF-4B-CV-2M25	19300241266
PG21	H24B-SF-4B-CV-PG21	09300241220
2PG21	H24B-SF-4B-CV-2PG21	09300241260
带金属盖With Metal Cover		
M25	H24B-SF-4B-MCV-M25	19300242226
2M25	H24B-SF-4B-MCV-2M25	19300242266
PG21	H24B-SF-4B-MCV-PG21	09300242220
2PG21	H24B-SF-4B-MCV-2PG21	09300242260



封底下壳 高结构 Housings, surface mounting, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	H24B-SFH-4B-M32	19300240127
2M32	H24B-SFH-4B-2M32	19300240167
2M40	H24B-SFH-4B-2M40	19300240168
PG21	H24B-SFH-4B-PG21	09300240120
2PG21	H24B-SFH-4B-2PG21	09300240160
PG29	H24B-SFH-4B-PG29	09300240121
2PG29	H24B-SFH-4B-2PG29	09300240161
带塑料盖With Plastic Cover		
M32	H24B-SFH-4B-CV-M32	19300240227
2M32	H24B-SFH-4B-CV-2M32	19300240267
2M40	H24B-SFH-4B-CV-2M40	19300240268
PG21	H24B-SFH-4B-CV-PG21	09300240220
2PG21	H24B-SFH-4B-CV-2PG21	09300240260
PG29	H24B-SFH-4B-CV-PG29	09300240221
2PG29	H24B-SFH-4B-CV-2PG29	09300240261
带金属盖With Metal Cover		
M32	H24B-SFH-4B-MCV-M32	19300242222
2M32	H24B-SFH-4B-MCV-2M32	19300242262
2M40	H24B-SFH-4B-MCV-2M40	19300242263
PG21	H24B-SFH-4B-MCV-PG21	09300242222
2PG21	H24B-SFH-4B-MCV-2PG21	09300242262
PG29	H24B-SFH-4B-MCV-PG29	09300242223
2PG29	H24B-SFH-4B-MCV-2PG29	09300242263



防护盖 Protection covers, metal




接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number
	防护金属盖/用于上壳 For hoods	H24B-MCV-4B/1	09300245442
	金属防护盖/用于下壳 For housings	H24B-MCV-4B/2	09300245443



防护盖 Protection covers, metal



接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number
	防护金属盖/用于上壳 For hoods	H24B-MCV-2L.1S	09300245422
	金属防护盖/用于下壳 For housings	H24B-MCV-2L.2S	09300245423




24B 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection : IP65

上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	H24B-SEH-1L/C-M25	19300240586
M32	H24B-SEH-1L/C-M32	19300240587
M40	H24B-SEH-1L/C-M40	19300240588
PG21	H24B-SEH-1L/C-PG21	09300240580
PG29	H24B-SEH-1L/C-PG29	09300240581



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	H24B-BK-2B/C	09300240382



不封底下壳 Housings, bulkhead mounting



螺纹 Thread	型号 Type	订货号 Part Number
---	H24B-BK-2B/B	09300240381



上壳侧出线/顶出线 高结构 Hoods, side&top entry, high construction



型号为:H24B-SEH/TEH-4B-XX/XX
如有需要请与我司联系


24B金属外壳 -适用苛刻环境(耐腐蚀)Metal Hoods & Housings For Higher Environmental Requirements

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M25	H24B-MSE-4B-M25	19370241521
PG21	H24B-MSE-4B-PG21	09370241520



上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	H24B-MSEH-4B-M32	19370240527
M40	H24B-MSEH-4B-M40	19370240528
PG29	H24B-MSEH-4B-PG29	09370240521



上壳 顶出线 Hoods, top entry




螺纹 Thread	型号 Type	订货号 Part Number
M25	H24B-MTE-4B-M25	9370241421
PG29	H24B-MTE-4B-PG29	9370240421



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	H24B-MTEH-4B-M32	19370240427
M40	H24B-MTEH-4B-M40	19370240428
PG29	H24B-MTEH-4B-PG29	09370240427



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	H24B-MBK-2L	09370240301



封底下壳 Housings, surface mounting




螺纹 Thread	型号 Type	订货号 Part Number
M25	H24B-MSF-2L-M25	19370240221
2M25	H24B-MSF-2L-2M25	19370240271
2M32	H24B-MSF-2L-2M32	19370240272
PG21	H24B-MSF-2L-PG21	09370240220
2PG21	H24B-MSF-2L-2PG21	09370240270
2PG29	H24B-MSF-2L-2PG29	09370240271




24B金属外壳 - 适用苛刻环境(耐腐蚀) Metal Hoods & Housings For Higher Environmental Requirements

防护等级 Degree of protection : IP65


封底下壳 高结构 Housings, surface mounting, high construction

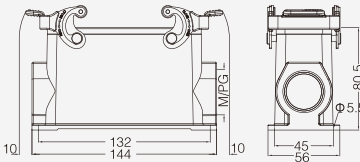	螺纹 Thread	型号 Type	订货号 Part Number	
	2M32	H24B-MSFH-2L-2M32	19370240272	
	2PG29	H24B-MSFH-2L-2PG29	09370240272	


防护盖 Protection covers, metal

	接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number	
		防护金属盖/用于上壳 For hoods	H24B-MMCV-4B/1	09370245404	
		防护金属盖/用于下壳 For housings	H24B-MMCV-4B/2	09370245405	


防护盖 Protection covers, metal

	接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number	
		防护金属盖/用于上壳 For hoods	H24B-MMCV-2L.1S	09370245402	
		防护金属盖/用于下壳 For housings	H24B-MMCV-2L.2S	09370245403	

上壳 侧出线 高结构 Hoods, side entry, high construction

	螺纹 Thread	型号 Type	订货号 Part Number	
	M32	H24B-MSEH-1L/C-M32	19370240587	
	PG29	H24B-MSEH-1L/C-PG29	09370240587	

不封底下壳 Housings, bulkhead mounting

	螺纹 Thread	型号 Type	订货号 Part Number	
	---	H24B-MBK-2B/C	09370240381	


24B高防护外壳 Hoods & Housings For Harsh Environmental Requirements

防护等级 Degree of protection : IP68

上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	HP24B-SEH-2S-M25	19400240211
M32	HP24B-SEH-2S-M32	19400240212
M40	HP24B-SEH-2S-M40	19400240213
PG21	HP24B-SEH-2S-PG21	09400240212
PG29	HP24B-SEH-2S-PG29	09400240213



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	HP24B-TEH-2S-M25	19400240221
M32	HP24B-TEH-2S-M32	19400240222
M40	HP24B-TEH-2S-M40	19400240223
M50	HP24B-TEH-2S-M50	19400240224
PG21	HP24B-TEH-2S-PG21	09400240222
PG29	HP24B-TEH-2S-PG29	09400240223
PG36	HP24B-TEH-2S-PG36	09400240224



封底下壳 高结构 Housings, surface mounting, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	HP24B-SFH-2H-M25	19400240231
M32	HP24B-SFH-2H-M32	19402240232
M40	HP24B-SFH-2H-M40	19400240233
PG21	HP24B-SFH-2H-PG21	09400240232
PG29	HP24B-SFH-2H-PG29	09400240233



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	HP24B-BK-2H	09400240201



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	HP24B-BK/S-2H	09400240202



塑料防护盖 Protection covers, plastic




螺纹 Thread	型号 Type	订货号 Part Number
---	HP24B-CV-2S/2	09400240205




24B高防护外壳 Hoods & Housings For Harsh Environmental Requirements

防护等级 Degree of protection : IP68


上壳 侧出线 高结构 Hoods, side entry, high construction

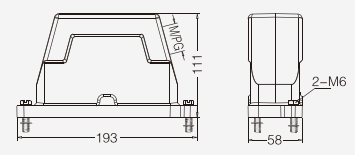	螺纹 Thread	型号 Type	订货号 Part Number	
		螺栓联锁Screw locking		
	M25	HP24B/H-SEH-2S-M25	19400240511	
	M32	HP24B/H-SEH-2S-M32	19400240512	
	M40	HP24B/H-SEH-2S-M40	19400240513	
	M50	HP24B/H-SEH-2S-M50	19400240514	
	2M32	HP24B/H-SEH-2S-2M32	19400240537	
	PG21	HP24B/H-SEH-2S-PG21	09400240512	
	PG29	HP24B/H-SEH-2S-PG29	09400240513	
	PG36	HP24B/H-SEH-2S-PG36	09400240514	
		轴销联锁Toggle locking		
	M25	HP24B/H-SEH-2T-M25	19400240501	
	M32	HP24B/H-SEH-2T-M32	19400240502	
	M40	HP24B/H-SEH-2T-M40	19400240503	
	PG21	HP24B/H-SEH-2T-PG21	09400240502	
	PG25	HP24B/H-SEH-2T-PG29	09400240503	
	PG36	HP24B/H-SEH-2T-PG36	09400240504	


上壳 顶出线 高结构 Hoods, top entry, high construction

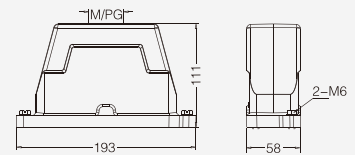
	螺纹 Thread	型号 Type	订货号 Part Number	
		螺栓联锁Screw locking		
	M25	HP24B/H-TEH-2S-M25	19400240411	
	M32	HP24B/H-TEH-2S-M32	19400240412	
	M40	HP24B/H-TEH-2S-M40	19400240413	
	M50	HP24B/H-TEH-2S-M50	19400240414	
	PG21	HP24B/H-TEH-2S-PG21	09400240412	
	PG29	HP24B/H-TEH-2S-PG29	09400240413	
	PG36	HP24B/H-TEH-2S-PG36	09400240414	
		轴销联锁Toggle locking		
	M25	HP24B/H-TEH-2T-M25	19400240401	
	M32	HP24B/H-TEH-2T-M32	19400240402	
	M40	HP24B/H-TEH-2T-M40	19400240403	
	M50	HP24B/H-TEH-2T-M50	19400240404	
	PG21	HP24B/H-TEH-2T-PG21	09400240402	
	PG29	HP24B/H-TEH-2T-PG29	09400240403	
	PG36	HP24B/H-TEH-2T-PG36	09400240404	

上壳 顶出线 高结构 Hoods, top entry, high construction

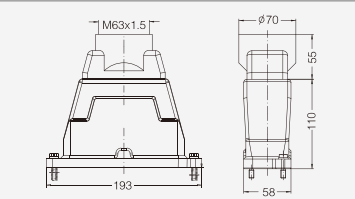	螺纹 Thread	型号 Type	订货号 Part Number	
		螺栓联锁Screw locking		
	M63	HP24B/H-TEH-2S-M63	19400240420	
	M63	HP24B/H-TEH-2T-M63	19400240410	

不封底下壳 Housings, bulkhead mounting

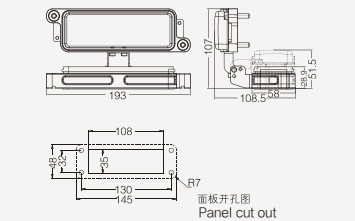	螺纹 Thread	型号 Type	订货号 Part Number	
		螺栓联锁Screw locking		
	---	HP24B/H-BK-2H	09400240311	
		轴销联锁Toggle locking		
	---	HP24B/H-BK-2T	09400240301	
		带金属盖With Metal Cover		
	---	HP24B/H-BK-2H-MCV	09400240317	
	---	HP24B/H-BK-2T-MCV	09400240307	

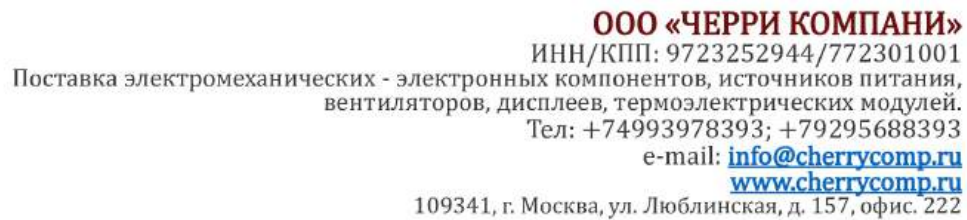

防护等级 Degree of protection : IP68

The technical drawing shows three views of the M6x1.5 nut plate:

- Top View:** Shows a rectangular plate with overall dimensions of 88 mm by 72 mm. It features four mounting holes with a diameter of Ø14 mm, spaced at 60 mm from the left edge and 18 mm from the bottom edge. The central hole has a diameter of Ø8.5 mm. A dimension of 216 mm is shown across the top, and 187 mm across the bottom.
- Side View:** Shows the profile of the plate with a total height of 19 mm. The thickness of the plate is 6 mm. The central hole has a depth of 15 mm. The material is labeled as M6x1.5.
- Detail View:** Shows a close-up of the corner of the plate, highlighting the chamfered edges and the mounting holes.

Technical drawing of the 1000 Series battery pack showing top and side views with dimensions:

- Top view dimensions: 193 (length), 57.5 (width), and 31 (height).
- Side view dimensions: 193 (length), 57.5 (width), and 31 (height).


24B高防护外壳 Hoods & Housings For Harsh Environmental Requirements

防护等级 Degree of protection : IP68

上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	HP24B/H-SEH-4S-M25	19400241361
M32	HP24B/H-SEH-4S-M32	19400241362
M40	HP24B/H-SEH-4S-M40	19400241363
PG21	HP24B/H-SEH-4S-PG21	09400241362
PG29	HP24B/H-SEH-4S-PG29	09400241363

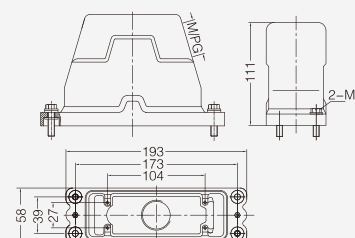

上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	HP24B/H-TEH-4S-M25	19400241461
M32	HP24B/H-TEH-4S-M32	19400241462
M40	HP24B/H-TEH-4S-M40	19400241463
M50	HP24B/H-TEH-4S-M50	19400241464
PG21	HP24B/H-TEH-4S-PG21	09400241461
PG29	HP24B/H-TEH-4S-PG29	09400241462
PG36	HP24B/H-TEH-4S-PG36	09400241463

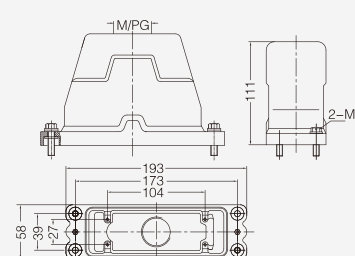

上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
3M32	HP24B/H-TEHH-4S-3M32	19400241566



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M63	HP24B/H-TEH-4S-M63	19400241520



不封底下壳 Housings, bulkhead mounting



螺纹 Thread	型号 Type	订货号 Part Number
---	HP24B/H-BK-4H	09400240202

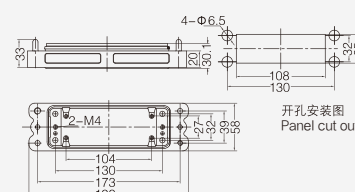


24B高防护外壳 Hoods & Housings For Harsh Environmental Requirements

防护等级 Degree of protection : IP68

整体型外壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	HC24B-SEH-2S-M32	19400241501
M40	HC24B-SEH-2S-M40	19400241502
PG21	HC24B-SEH-2S-PG21	09400241501
PG29	HC24B-SEH-2S-PG29	09400241502



整体型外壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	HC24B-TEH-2S-M32	19400241551
M40	HC24B-TEH-2S-M40	19400241552
PG21	HC24B-TEH-2S-PG21	09400241551
PG29	HC24B-TEH-2S-PG29	09400241552



芯体安装支块 Mounting frames



描述 Applications	型号 Type	订货号 Part Number
整体型外壳适配 For integral type hoods	APT-C	09400241600




HV24B金属外壳 适用高压插芯(HVE系列) Metal Hoods & Housings For High Voltage Inserts(HVE Series)

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV24B-SE-2B-M25	19340241541
M32	HV24B-SE-2B-M32	19340241542
PG21	HV24B-SE-2B-PG21	09340241540



上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	HV24B-SEH-2B-M32	19340240547
M40	HV24B-SEH-2B-M40	19340240548
PG21	HV24B-SEH-2B-PG21	09340240540
PG29	HV24B-SEH-2B-PG29	09340240541
PG36	HV24B-SEH-2B-PG36	09340240546



上壳 顶出线 Hoods, top entry



螺纹 Thread	型号 Type	订货号 Part Number
M25	HV24B-TE-2B-M25	19340241441
M32	HV24B-TE-2B-M32	19340241442
PG21	HV24B-TE-2B-PG21	09340241440
PG29	HV24B-TE-2B-PG29	09340241441



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	HV24B-TEH-2B-M32	19340240447
M40	HV24B-TEH-2B-M40	19340240448
PG21	HV24B-TEH-2B-PG21	09340240440
PG29	HV24B-TEH-2B-PG29	09340240441
PG36	HV24B-TEH-2B-PG36	09340240446



飞线下壳 Housings, cable to cable




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV24B-CCT-1L-M25	19340241751
M32	HV24B-CCT-1L-M32	19340241752
PG21	HV24B-CCT-1L-PG21	09340241750
PG29	HV24B-CCT-1L-PG29	09340241751



飞线下壳 高结构 Housings, cable to cable, high construction



螺纹 Thread	型号 Type	订货号 Part Number
M32	HV24B-CCTH-1L-M32	19340240757
M40	HV24B-CCTH-1L-M40	19340240758
PG21	HV24B-CCTH-1L-PG21	09340240750
PG29	HV24B-CCTH-1L-PG29	09340240751




HV24B金属外壳 适用高压插芯(HVE系列) Metal Hoods & Housings For High Voltage Inserts(HVE Series)

防护等级 Degree of protection : IP65

不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	HV24B-BK-1L	09340240307
	带塑料盖 With Plastic Cover	
---	HV24B-BK-1L-CV	09340240304
	带金属盖 With Metal Cover	
---	HV24B-BK-1L-MCV	09340240318

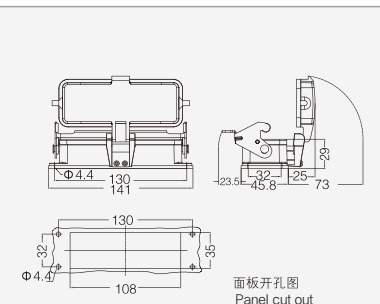

封底下壳 Housings, surface mounting




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV24B-SF-1L-M25	19340241251
2M25	HV24B-SF-1L-2M25	19340241291
PG21	HV24B-SF-1L-PG21	09340241250
2PG21	HV24B-SF-1L-2PG21	09340241290
	带塑料盖 With Plastic Cover	
M25	HV24B-SF-1L-CV-M25	19340241256
2M25	HV24B-SF-1L-CV-2M25	19340241296
PG21	HV24B-SF-1L-CV-PG21	09340241255
2PG21	HV24B-SF-1L-CV-2PG21	09340241295
	带金属盖 With Metal Cover	
M25	HV24B-SF-1L-MCV-M25	19340242256
2M25	HV24B-SF-1L-MCV-2M25	19340242296
PG21	HV24B-SF-1L-MCV-PG21	09340242255
2PG21	HV24B-SF-1L-MCV-2PG21	09340242295

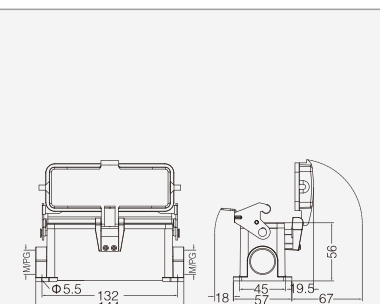

封底下壳 高结构 Housings, surface mounting, high construction



螺纹 Thread	型号 Type	订货号 Part Number
M32	HV24B-SFH-1L-M32	19340240252
2M32	HV24B-SFH-1L-2M32	19340240292
PG21	HV24B-SFH-1L-PG21	09340240250
2PG21	HV24B-SFH-1L-2PG21	09340240290
PG29	HV24B-SFH-1L-PG29	09340240251
2PG29	HV24B-SFH-1L-2PG29	09340240291
	带塑料盖 With Plastic Cover	
M32	HV24B-SFH-1L-CV-M32	19340240257
2M32	HV24B-SFH-1L-CV-2M32	19340240297
PG21	HV24B-SFH-1L-CV-PG21	09340240255
2PG21	HV24B-SFH-1L-CV-2PG21	09340240295
PG29	HV24B-SFH-1L-CV-PG29	09340240256
2PG29	HV24B-SFH-1L-CV-2PG29	09340240296
	带金属盖 With Metal Cover	
M32	HV24B-SFH-1L-MCV-M32	19340247257
2M32	HV24B-SFH-1L-MCV-2M32	19340247297
PG21	HV24B-SFH-1L-MCV-PG21	09340242257
2PG21	HV24B-SFH-1L-MCV-2PG21	09340242297
PG29	HV24B-SFH-1L-MCV-PG29	09340242258
2PG29	HV24B-SFH-1L-MCV-2PG29	09340242298

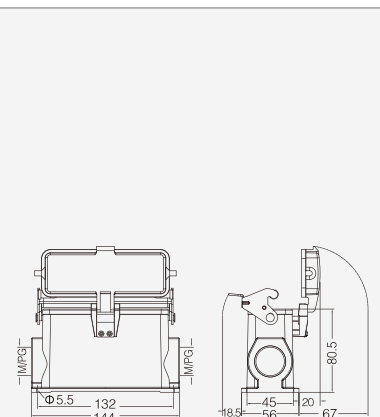


HV24B金属外壳 适用高压插芯(HVE系列) Metal Hoods & Housings For High Voltage Inserts(HVE Series)

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV24B-SE-4B-M25	19340240521
M32	HV24B-SE-4B-M32	19340241522
PG21	HV24B-SE-4B-PG21	09340241520



上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	HV24B-SEH-4B-M32	19340240527
M40	HV24B-SEH-4B-M40	19340240528
PG21	HV24B-SEH-4B-PG21	09340240520
PG29	HV24B-SEH-4B-PG29	09340240521



上壳 顶出线 Hoods, top entry




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV24B-TE-4B-M25	19340240422
M32	HV24B-TE-4B-M32	19340241422
PG21	HV24B-TE-4B-PG21	09340241420
PG29	HV24B-TE-4B-PG29	09340241421



上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	HV24B-TEH-4B-M32	19340240427
M40	HV24B-TEH-4B-M40	19340240428
PG21	HV24B-TEH-4B-PG21	09340240420
PG29	HV24B-TEH-4B-PG29	09340240421



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	HV24B-BK-2L	09340240301



封底下壳 Housings, surface mounting



螺纹 Thread	型号 Type	订货号 Part Number
M25	HV24B-SF-2L-M25	19340240271
2M25	HV24B-SF-2L-2M25	19340241271
PG21	HV24B-SF-2L-PG21	09340241230
2PG21	HV24B-SF-2L-2PG21	09340241270




HV24B金属外壳 适用高压插芯(HVE系列) Metal Hoods & Housings For High Voltage Inserts(HVE Series)

防护等级 Degree of protection : IP65

封底下壳 高结构 Housings, surface mounting, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	HV24B-SFH-2L-M32	19340240232
2M32	HV24B-SFH-2L-2M32	19340240272
2M40	HV24B-SFH-2L-2M40	19340240273
PG21	HV24B-SFH-2L-PG21	09340240230
2PG21	HV24B-SFH-2L-2PG21	09340240270
PG29	HV24B-SFH-2L-PG29	09340240231
2PG29	HV24B-SFH-2L-2PG29	09340240271

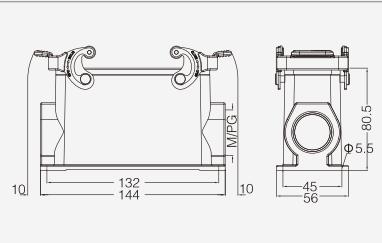

飞线下壳 Housings, cable to cable




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV24B-CCT-2L-M25	19340241731
M32	HV24B-CCT-2L-M32	19340240732
PG21	HV24B-CCT-2L-PG21	09340241730
PG29	HV24B-CCT-2L-PG29	09340241731

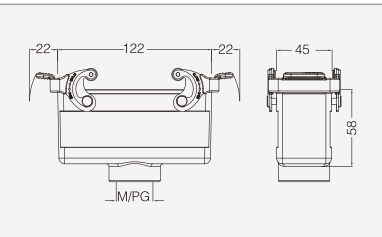

飞线下壳 高结构 Housings, cable to cable, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	HV24B-CCTH-2L-M32	19340240737
M40	HV24B-CCTH-2L-M40	19340240738
PG21	HV24B-CCTH-2L-PG21	09340240730
PG29	HV24B-CCTH-2L-PG29	09340240731

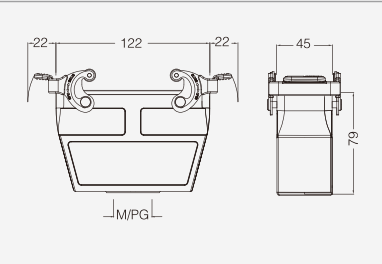

塑料防护盖 4卡扣 Protection covers, plastic




接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number
---	用于上壳 For hoods	H24B-CV-4C	09340245401

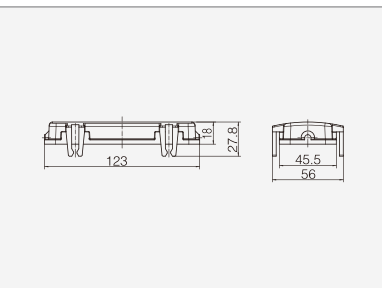

塑料防护盖 Protection covers, plastic



接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number
	塑料盖/用于飞线下壳 For Housings, cable to cable	H24B-CV-4B/1	09300245425
	塑料盖/用于不封底,封底下壳 For housing, bulkhead/ surface mounting	H24B-CV-4B/2	09300245426

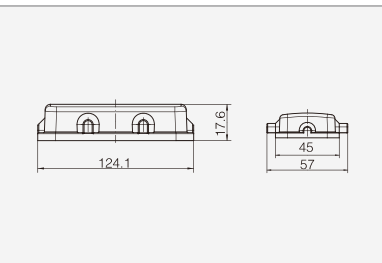


HV24B金属外壳 适用高压插芯(HVE系列) Metal Hoods & Housings For High Voltage Inserts(HVE Series)

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV24B-SE-2L-M25	19340241531
M32	HV24B-SE-2L-M32	19340241532
PG21	HV24B-SE-2L-PG21	09340241530



上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	HV24B-SEH-2L-M32	19340240537
M40	HV24B-SEH-2L-M40	19340240538
PG21	HV24B-SEH-2L-PG21	09340240530
PG29	HV24B-SEH-2L-PG29	09340240531

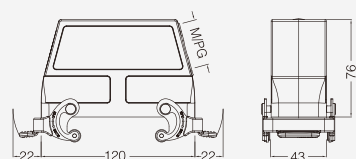

上壳 顶出线 Hoods, top entry




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV24B-TE-2L-M25	19340241431
M32	HV24B-TE-2L-M32	19340241432
PG21	HV24B-TE-2L-PG21	09340241430
PG29	HV24B-TE-2L-PG29	09340241431

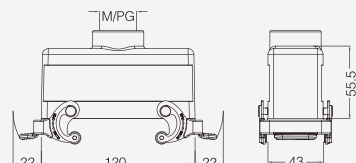

上壳 顶出线 高结构 Hoods, top entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	HV24B-TEH-2L-M32	19340240437
M40	HV24B-TEH-2L-M40	19340240438
PG21	HV24B-TEH-2L-PG21	09340240430
PG29	HV24B-TEH-2L-PG29	09340240431

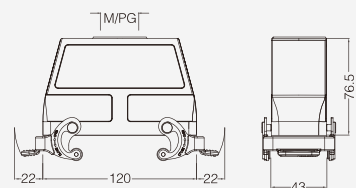

不封底下壳 Housings, bulkhead mounting



螺纹 Thread	型号 Type	订货号 Part Number
---	HV24B-BK-4B	09340240300
---	带塑料盖 With Plastic Cover	
---	HV24B-BK-4B-CV	09340240302
---	带金属盖 With Metal Cover	
---	HV24B-BK-4B-MCV	09340240317




HV24B金属外壳 适用高压插芯(HVE系列) Metal Hoods & Housings For High Voltage Inserts(HVE Series)

防护等级 Degree of protection : IP65

封底下壳 Housings, surface mounting




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV24B-SF-4B-M25	19340241126
2M25	HV24B-SF-4B-2M25	19340241166
PG21	HV24B-SF-4B-PG21	09340241120
2PG21	HV24B-SF-4B-2PG21	09340241160
带塑料盖With Plastic Cover		
M25	HV24B-SF-4B-CV-M25	19340241226
2M25	HV24B-SF-4B-CV-2M25	19340241266
PG21	HV24B-SF-4B-CV-PG21	09340241220
2PG21	HV24B-SF-4B-CV-2PG21	09340241260
带金属盖With Metal Cover		
M25	HV24B-SF-4B-MCV-M25	19340242226
2M25	HV24B-SF-4B-MCV-2M25	19340242266
PG21	HV24B-SF-4B-MCV-PG21	09340242220
2PG21	HV24B-SF-4B-MCV-2PG21	09340242260



封底下壳 高结构 Housings, surface mounting, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M32	HV24B-SFH-4B-M32	19340240127
2M32	HV24B-SFH-4B-2M32	19340240167
PG21	HV24B-SFH-4B-PG21	09340240120
2PG21	HV24B-SFH-4B-2PG21	09340240160
PG29	HV24B-SFH-4B-PG29	09340240121
2PG29	HV24B-SFH-4B-2PG29	09340240161
带塑料盖With Plastic Cover		
M32	HV24B-SFH-4B-CV-M32	19340240227
2M32	HV24B-SFH-4B-CV-2M32	19340240267
PG21	HV24B-SFH-4B-CV-PG21	09340240220
2PG21	HV24B-SFH-4B-CV-2PG21	09340240260
PG29	HV24B-SFH-4B-CV-PG29	09340240221
2PG29	HV24B-SFH-4B-CV-2PG29	09340240261
带金属盖With Metal Cover		
M32	HV24B-SFH-4B-MCV-M32	19340242222
2M32	HV24B-SFH-4B-MCV-2M32	19340242262
PG21	HV24B-SFH-4B-MCV-PG21	09340242222
2PG21	HV24B-SFH-4B-MCV-2PG21	09340242262
PG29	HV24B-SFH-4B-MCV-PG29	09340242223
2PG29	HV24B-SFH-4B-MCV-2PG29	09340242263

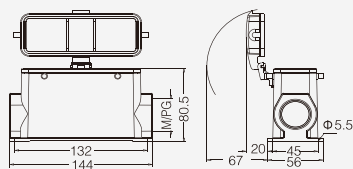

防护盖 Protection covers, metal




接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number
	金属保护盖/用于上壳 For hoods	H24B-MCV-4B/1	09300245442
	金属保护盖/用于下壳 For housings	H24B-MCV-4B/2	09340245443



防护盖 Protection covers, metal



接线方式 Connect way	描述 Applications	型号 Type	订货号 Part Number
	金属保护盖/用于上壳 For hoods	H24B-MCV-2L.1S	09300245422
	金属保护盖/用于下壳 For housings	H24B-MCV-2L.2S	09340245423




HV24B金属外壳 适用高压插芯(HVE系列) Metal Hoods & Housings For High Voltage Inserts(HVE Series)

防护等级 Degree of protection : IP65

上壳 侧出线 高结构 Hoods, side entry, high construction




螺纹 Thread	型号 Type	订货号 Part Number
M25	HV24B-SEH-1L/C-M25	19340240586
M32	HV24B-SEH-1L/C-M32	19340240587
M40	HV24B-SEH-1L/C-M40	19340240588
PG21	HV24B-SEH-1L/C-PG21	09340240580
PG29	HV24B-SEH-1L/C-PG29	09340240581



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	HV24B-BK-2B/C	09340240382



不封底下壳 Housings, bulkhead mounting



螺纹 Thread	型号 Type	订货号 Part Number
---	HV24B-BK-2B/B	09340240381



32B 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M32	H32B-SE-2B-M32	19300320547
M40	H32B-SE-2B-M40	19300320548
M50	H32B-SE-2B-M50	19300320549
PG29	H32B-SE-2B-PG29	09300320541
PG36	H32B-SE-2B-PG36	09300320542
PG42	H32B-SE-2B-PG42	09300320543



上壳 顶出线 Hoods, top entry




螺纹 Thread	型号 Type	订货号 Part Number
M32	H32B-TE-2B-M32	19300320447
M40	H32B-TE-2B-M40	19300320448
M50	H32B-TE-2B-M50	19300320449
PG29	H32B-TE-2B-PG29	09300320441
PG36	H32B-TE-2B-PG36	09300320442
PG42	H32B-TE-2B-PG42	09300320443



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	H32B-BK-1L	09300320307
---	带塑料盖 With plastic cover	
---	H32B-BK-1L-CV	09300320304
---	带金属盖 With metal cover	
---	H32B-BK-1L-MCV	09300320318



封底下壳 Housings, surface mounting




螺纹 Thread	型号 Type	订货号 Part Number
M32	H32B-SF-1L-M32	19300320252
2M32	H32B-SF-1L-2M32	19300320292
M40	H32B-SF-1L-M40	19300320253
2M40	H32B-SF-1L-2M40	19300320293
M50	H32B-SF-1L-M50	19300320254
PG29	H32B-SF-1L-PG29	09300320251
2PG29	H32B-SF-1L-2PG29	09300320291
PG36	H32B-SF-1L-PG36	09300320252
2PG36	H32B-SF-1L-2PG36	09300320292
---	带塑料盖 With plastic cover	
M32	H32B-SF-1L-CV-M32	19300320257
2M32	H32B-SF-1L-CV-2M32	19300320297
M40	H32B-SF-1L-CV-M40	19300320258
2M40	H32B-SF-1L-CV-2M40	19300320298
PG29	H32B-SF-1L-CV-PG29	09300320257
2PG29	H32B-SF-1L-CV-2PG29	09300320297
PG36	H32B-SF-1L-CV-PG36	09300320258
2PG36	H32B-SF-1L-CV-2PG36	09300320298
---	带金属盖 With metal cover	
M32	H32B-SF-1L-MCV-M32	19300321257
2M32	H32B-SF-1L-MCV-2M32	19300321297
M40	H32B-SF-1L-MCV-M40	19300321258
2M40	H32B-SF-1L-MCV-2M40	19300321298
PG29	H32B-SF-1L-MCV-PG29	09300321257
2PG29	H32B-SF-1L-MCV-2PG29	09300321297
PG36	H32B-SF-1L-MCV-PG36	09300321258
2PG36	H32B-SF-1L-MCV-2PG36	09300321298




32B 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection : IP65

防护盖 Protection covers, metal




螺纹 Thread	型号 Type	订货号 Part Number
---	H32B-MCV-2L.1S	09300325420

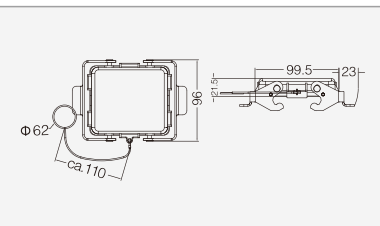

不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	H32B-BK-4B	09300320301
---	带塑料盖 With plastic cover	
---	H32B-BK-4B-CV	09300320302
---	带金属盖 With metal cover	
---	H32B-BK-4B-MCV	09300320303

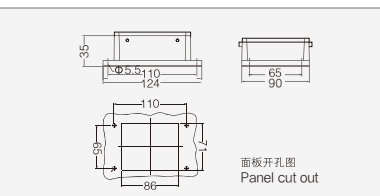

封底下壳 Housings, surface mounting




螺纹 Thread	型号 Type	订货号 Part Number
M32	H32B-SF-4B-M32	19300321126
2M32	H32B-SF-4B-2M32	19300321166
M40	H32B-SF-4B-M40	19300321127
2M40	H32B-SF-4B-2M40	19300321167
PG29	H32B-SF-4B-PG29	09300321120
2PG29	H32B-SF-4B-2PG29	09300321160
PG36	H32B-SF-4B-PG36	09300321121
2PG36	H32B-SF-4B-2PG36	09300321161
PG42	H32B-SF-4B-PG42	09300321122

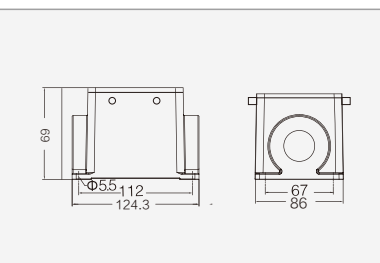

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M32	H32B-SE-2L-M32	19300320537
PG29	H32B-SE-2L-PG29	09300320531

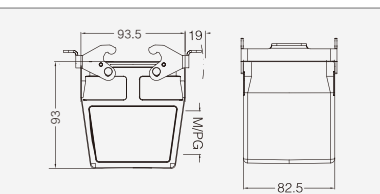

上壳 顶出线 Hoods, top entry



螺纹 Thread	型号 Type	订货号 Part Number
M32	H32B-TE-2L-M32	19300320437
M40	H32B-TE-2L-M40	19300320438
M50	H32B-TE-2L-M50	19300320439
PG29	H32B-TE-2L-PG29	09300320431
PG36	H32B-TE-2L-PG36	09300320432
PG42	H32B-TE-2L-PG42	09300320433

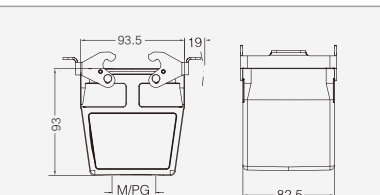


HV32B金属外壳-适用高压插芯(HVE系列) Metal Hoods & Housings For High Voltage Inserts(HVE Series)

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M32	HV32B-SE-2B-M32	19340320547
PG29	HV32B-SE-2B-PG29	09400320541
PG36	HV32B-SE-2B-PG36	09340320542
PG42	HV32B-SE-2B-PG42	09340320543



上壳 顶出线 Hoods, top entry




螺纹 Thread	型号 Type	订货号 Part Number
M32	HV32B-TE-2B-M32	19340320447
M40	HV32B-TE-2B-M40	19340320448
M50	HV32B-TE-2B-M50	19340320449
PG29	HV32B-TE-2B-PG29	09340320441
PG36	HV32B-TE-2B-PG36	09340320442
PG42	HV32B-TE-2B-PG42	09340320443



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	HV32B-BK-1L	09340320307
---	带塑料盖 With plastic cover	
---	HV32B-BK-1L-CV	09340320304
---	带金属盖 With metal cover	
---	HV32B-BK-1L-MCV	09340320318



封底下壳 Housings, surface mounting



螺纹 Thread	型号 Type	订货号 Part Number
M32	HV32B-SF-1L-M32	19340320252
2M32	HV32B-SF-1L-2M32	19340320292
M40	HV32B-SF-1L-M40	19340320253
2M40	HV32B-SF-1L-2M40	19340320293
PG29	HV32B-SF-1L-PG29	09340320251
2PG29	HV32B-SF-1L-2PG29	09340320291
PG36	HV32B-SF-1L-PG36	09340320252
2PG36	HV32B-SF-1L-2PG36	09340320292
---	带塑料盖 With plastic cover	
M32	HV32B-SF-1L-CV-M32	19340320257
2M32	HV32B-SF-1L-CV-2M32	19340320297
M40	HV32B-SF-1L-CV-M40	19340320258
2M40	HV32B-SF-1L-CV-2M40	19340320298
PG29	HV32B-SF-1L-CV-PG29	09340320257
2PG29	HV32B-SF-1L-CV-2PG29	09340320297
PG36	HV32B-SF-1L-CV-PG36	09340320258
2PG36	HV32B-SF-1L-CV-2PG36	09340320298
---	带金属盖 With metal cover	
M32	HV32B-SF-1L-MCV-M32	19340321257
2M32	HV32B-SF-1L-MCV-2M32	19340321297
M40	HV32B-SF-1L-MCV-M40	19340321258
2M40	HV32B-SF-1L-MCV-2M40	19340321298
PG29	HV32B-SF-1L-MCV-PG29	09340321257
2PG29	HV32B-SF-1L-MCV-2PG29	09340321297
PG36	HV32B-SF-1L-MCV-PG36	09340321258
2PG36	HV32B-SF-1L-MCV-2PG36	09340321298




HV32B金属外壳-适用高压插芯(HVE系列) Metal Hoods & Housings For High Voltage Inserts(HVE Series)

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M32	HV32B-SE-4B-M32	19340320527
M40	HV32B-SE-4B-M40	19340320528
M50	HV32B-SE-4B-M50	19340320529
PG29	HV32B-SE-4B-PG29	09340320521
PG36	HV32B-SE-4B-PG36	09340320522
PG42	HV32B-SE-4B-PG42	09340320523



上壳 顶出线 Hoods, top entry




螺纹 Thread	型号 Type	订货号 Part Number
M32	HV32B-TE-4B-M32	19340320427
M40	HV32B-TE-4B-M40	19340320428
M50	HV32B-TE-4B-M50	19340320429
PG29	HV32B-TE-4B-PG29	09340320421
PG36	HV32B-TE-4B-PG36	09340320422
PG42	HV32B-TE-4B-PG42	09340320423



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	HV32B-BK-2L	09340320301



封底下壳 Housings, surface mounting




螺纹 Thread	型号 Type	订货号 Part Number
M32	HV32B-SF-2L-M32	19340320232
2M32	HV32B-SF-2L-2M32	19340320272
M40	HV32B-SF-2L-M40	19340320233
2M40	HV32B-SF-2L-2M40	19340320273
PG29	HV32B-SF-2L-PG29	09340320231
2PG29	HV32B-SF-2L-2PG29	09340320271
PG36	HV32B-SF-2L-PG36	09340320232
2PG36	HV32B-SF-2L-2PG36	09340320272
2PG42	HV32B-SF-2L-2PG42	09340320273



飞线下壳 Housings, cable to cable




螺纹 Thread	型号 Type	订货号 Part Number
M32	HV32B-CCT-2L-M32	19340320737
M40	HV32B-CCT-2L-M40	19340320738
PG29	HV32B-CCT-2L-PG29	09340320731
PG36	HV32B-CCT-2L-PG36	09340320732
PG42	HV32B-CCT-2L-PG42	09340320733




防护盖 Protection covers, metal



螺纹 Thread	型号 Type	订货号 Part Number
---	HV32B-MCV-4B/2	09340325425






HV32B金属外壳-适用高压插芯(HVE系列) Metal Hoods & Housings For High Voltage Inserts(HVE Series)

防护等级 Degree of protection : IP65


防护盖 Protection covers, metal



螺纹 Thread

型号 Type
HV32B-MCV-2L.1S

订货号 Part Number
09340325420




48B 金属外壳 Metal Hoods & Housings

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M32	H48B-SE-2B-M32	19300480547
M40	H48B-SE-2B-M40	19300480548
M50	H48B-SE-2B-M50	19300480549
PG29	H48B-SE-2B-PG29	09300480540
PG36	H48B-SE-2B-PG36	09300480541
PG42	H48B-SE-2B-PG42	09300480542



上壳 顶出线 Hoods, top entry




螺纹 Thread	型号 Type	订货号 Part Number
M32	H48B-TE-2B-M32	19300480447
M40	H48B-TE-2B-M40	19300480448
M50	H48B-TE-2B-M50	19300480449
PG29	H48B-TE-2B-PG29	09300480440
PG36	H48B-TE-2B-PG36	09300480441
PG42	H48B-TE-2B-PG42	09300480442



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	H48B-BK-1L	09300480300
---	带塑料盖 With plastic cover	
---	H48B-BK-1L-CV	09300480301
---	带金属盖 With metal cover	
---	H48B-BK-1L-MCV	09300480317



封底下壳 Housings, surface mounting



螺纹 Thread	型号 Type	订货号 Part Number
M32	H48B-SF-1L-M32	19300480252
2M32	H48B-SF-1L-2M32	19300480292
M40	H48B-SF-1L-M40	19300480253
2M40	H48B-SF-1L-2M40	19300480293
M50	H48B-SF-1L-M50	19300480254
2M50	H48B-SF-1L-2M50	19300480294
PG29	H48B-SF-1L-PG29	09300480250
2PG29	H48B-SF-1L-2PG29	09300480290
PG36	H48B-SF-1L-PG36	09300480251
2PG36	H48B-SF-1L-2PG36	09300480291
---	带塑料盖 With plastic cover	
M32	H48B-SF-1L-CV-M32	19300480257
2M32	H48B-SF-1L-CV-2M32	19300480297
M40	H48B-SF-1L-CV-M40	19300480258
2M40	H48B-SF-1L-CV-2M40	19300480298
PG29	H48B-SF-1L-CV-PG29	09300480255
2PG29	H48B-SF-1L-CV-2PG29	09300480295
PG36	H48B-SF-1L-CV-PG36	09300480256
2PG36	H48B-SF-1L-CV-2PG36	09300480296
---	带金属盖 With metal cover	
M32	H48B-SF-1L-MCV-M32	19300482257
2M32	H48B-SF-1L-MCV-2M32	19300482297
M40	H48B-SF-1L-MCV-M40	19300482258
2M40	H48B-SF-1L-MCV-2M40	19300482298
PG29	H48B-SF-1L-MCV-PG29	09300482255
2PG29	H48B-SF-1L-MCV-2PG29	09300482295
PG36	H48B-SF-1L-MCV-PG36	09300482256
2PG36	H48B-SF-1L-MCV-2PG36	09300482296

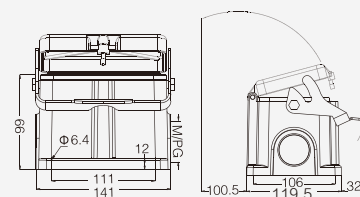


HV48B金属外壳-适用高压插芯(HVE系列) Metal Hoods & Housings For High Voltage Inserts(HVE Series)

防护等级 Degree of protection : IP65

上壳 侧出线 Hoods, side entry




螺纹 Thread	型号 Type	订货号 Part Number
M32	HV48B-SE-2B-M32	19340480547
M40	HV48B-SE-2B-M40	19340480548
M50	HV48B-SE-2B-M50	19340480549
PG29	HV48B-SE-2B-PG29	09340480540
PG36	HV48B-SE-2B-PG36	09340480541
PG42	HV48B-SE-2B-PG42	09340480542



上壳 顶出线 Hoods, top entry




螺纹 Thread	型号 Type	订货号 Part Number
M32	HV48B-TE-2B-M32	19340480447
M40	HV48B-TE-2B-M40	19340480448
M50	HV48B-TE-2B-M50	19340480449
PG29	HV48B-TE-2B-PG29	09340480440
PG36	HV48B-TE-2B-PG36	09340480441
PG42	HV48B-TE-2B-PG42	09340480442



不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type	订货号 Part Number
---	HV48B-BK-1L	09340480300
---	带塑料盖 With plastic cover	
---	HV48B-BK-1L-CV	09340480301
---	带金属盖 With metal cover	
---	HV48B-BK-1L-MCV	09340480317




封底下壳 Housings, surface mounting



螺纹 Thread	型号 Type	订货号 Part Number
M32	HV48B-SF-1L-M32	19340480252
2M32	HV48B-SF-1L-2M32	19340480292
M40	HV48B-SF-1L-M40	19340480253
2M40	HV48B-SF-1L-2M40	19340480293
PG29	HV48B-SF-1L-PG29	09340480250
2PG29	HV48B-SF-1L-2PG29	09340480290
PG36	HV48B-SF-1L-PG36	09340480251
2PG36	HV48B-SF-1L-2PG36	09340480291
---	带塑料盖 With plastic cover	
M32	HV48B-SF-1L-CV-M32	19340480257
2M32	HV48B-SF-1L-CV-2M32	19340480297
M40	HV48B-SF-1L-CV-M40	19340480258
2M40	HV48B-SF-1L-CV-2M40	19340480298
PG29	HV48B-SF-1L-CV-PG29	09340480255
2PG29	HV48B-SF-1L-CV-2PG29	09340480295
PG36	HV48B-SF-1L-CV-PG36	09340480256
2PG36	HV48B-SF-1L-CV-2PG36	09340480296
---	带金属盖 With metal cover	
M32	HV48B-SF-1L-MCV-M32	19340482257
2M32	HV48B-SF-1L-MCV-2M32	19340482297
M40	HV48B-SF-1L-MCV-M40	19340482258
2M40	HV48B-SF-1L-MCV-2M40	19340482298
PG29	HV48B-SF-1L-MCV-PG29	09340482255
2PG29	HV48B-SF-1L-MCV-2PG29	09340482295
PG36	HV48B-SF-1L-MCV-PG36	09340482256
2PG36	HV48B-SF-1L-MCV-2PG36	09340482296

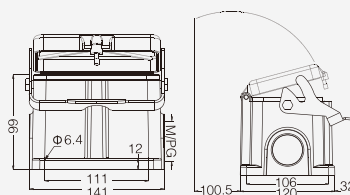




HC塑料外壳 Plastic Hoods & Housings

防护等级 Degree of protection : IP65

飞线下壳 Housings, cable to cable




螺纹 Thread	型号 Type	订货号 Part Number
M25	HC.P-CCT-1L-M25	19120080729
PG16	HC.P-CCT-1L-PG16	09120080727



飞线下壳 Housings, cable to cable




螺纹 Thread	型号 Type	订货号 Part Number
PAFS18	HC.P-CCT-1L-PAFS18	09120080728



防护盖 Protection covers, metal




螺纹 Thread	型号 Type	订货号 Part Number
---	不带密封圈 Without sealing	
---	HC.P-CV-2B/1	09120085407
---	带密封圈 With sealing	
---	HC.P-CV-2B/2	09120085408



电缆接头 用于上壳 Cable gland, for housings



螺纹 Thread	型号 Type	订货号 Part Number
M25	WNAPC-M25B(D6.5-9.5)	19120005156
M25	WNAPC-M25B(D10.5-14)	19120005157
M25	WNAPC-M25B(D14-17)	19120005158
PG16	WNAPC-PG16B(D11.5-15.5)	09000005059
PG21	WNAPC-PG21B(D14-18)	09000005157
PG21	WNAPC-PG21B(D17-20.5)	09000005158




	cable		SW
	min.	max.	
WNAPC-M25B/ (D6.5-9.5)	6.5 mm	9.5 mm	30
WNAPC-M25B/ (D10.5-14)	10.5 mm	14 mm	30
WNAPC-M25B/ (D14-17)	14 mm	17 mm	30
WNAPC-PG16B/ (D11.5-15.5)	11.5 mm	15.5 mm	27
WNAPC-PG21B/ (D14-18)	14 mm	18 mm	33
WNAPC-PG21B/ (D17-20.5)	17 mm	20.5 mm	33

电缆接头 用于上壳 Cable gland, for housings



螺纹 Thread	型号 Type	订货号 Part Number
PG16	WNAPC-PG16BS(D6.5-9.5)	09000005058
PG16	WNAPC-PG16BS(D11.5-15.5)	09000005057



	cable		SW
	min.	max.	
WNAPC-PG16BS/ (D6.5-9.5)	6.5 mm	9.5 mm	27
WNAPC-PG16BS/ (D11.5-15.5)	11.5 mm	15.5 mm	27

HC金属外壳 Metal Hoods & Housings

喷涂Epoxy power paint 防护等级 Degree of protection : IP65


上壳 侧出线 Hoods, side entry



螺纹 Thread
M25

型号 Type
HC-SE-2B-M25

订货号 Part Number
19127080501




上壳 侧出线 高结构 上下分体式 Hoods, side entry, high construction



螺纹 Thread
M25

型号 Type
HC-SEH-2B-M25

订货号 Part Number
19127080511




上壳 顶出线 高结构 上下分体式 Hoods, top entry, high construction



螺纹 Thread
M25

型号 Type
HC-TEH-2B-M25

订货号 Part Number
19127080411




上壳 侧出线 高结构 合盖式 Hoods, side entry, high construction



螺纹 Thread
M25

型号 Type
HC-SEHS-2B-M25

订货号 Part Number
19120080526




上壳 顶出线 高结构 合盖式 Hoods, top entry, high construction



螺纹 Thread
M25

型号 Type
HC-TEHS-2B-M25

订货号 Part Number
19120080426




不封底下壳 Housings, bulkhead mounting



螺纹 Thread

型号 Type
HC-BK-1L/S

订货号 Part Number
09127080301







HC金属外壳 Metal Hoods & Housings

喷涂Epoxy power paint 防护等级 Degree of protection : IP65

防护盖 Protection covers, metal




螺纹 Thread	型号 Type	订货号 Part Number
---	不带密封圈 Without sealing	
---	HC-MCV-2B/1	09120085409
---	带密封圈 With sealing	
---	HC-MCV-2B/2	09120085410



电缆接头 用于上壳 Cable gland, for housings



螺纹 Thread	型号 Type	订货号 Part Number
M25	WNAMC-M25(D10.5-14)	19120005057
M25	WNAMC-M25(D14-17)	19120005058



	Φ (线径)	cable		SW
		min.	max.	
WNAMC-M25	10.5-14	10.5 mm	14 mm	28
WNAMC-M25	14-17	14 mm	17 mm	28

HC金属外壳 Metal Hoods & Housings

镀铬Chromated 防护等级 Degree of protection : IP65


上壳 侧出线 Hoods, side entry



螺纹 Thread
M25

型号 Type
C.HC-SE-2B-M25

订货号 Part Number
19120080501




上壳 侧出线 高结构 上下分体式 Hoods, side entry, high construction



螺纹 Thread
M25

型号 Type
C.HC-SEH-2B-M25

订货号 Part Number
19120080511




上壳 顶出线 高结构 上下分体式 Hoods, top entry, high construction



螺纹 Thread
M25

型号 Type
C.HC-TEH-2B-M25

订货号 Part Number
19120080411




上壳 侧出线 高结构 合盖式 Hoods, side entry, high construction



螺纹 Thread
M25

型号 Type
C.HC-SEHS-2B-M25

订货号 Part Number
19120080527




上壳 顶出线 高结构 合盖式 Hoods, top entry, high construction



螺纹 Thread
M25

型号 Type
C.HC-TEHS-2B-M25

订货号 Part Number
19120080427




不封底下壳 Housings, bulkhead mounting



螺纹 Thread

型号 Type
C.HC-BK-1L/S

订货号 Part Number
09120080301




HC金属外壳 Metal Hoods & Housings

镀铬Chromated 防护等级 Degree of protection : IP65

防护盖 Protection covers, metal




螺纹 Thread	型号 Type	订货号 Part Number
---	不带密封圈Without sealing	
---	C.HC-MCV-2B/1	09120085411
---	带密封圈With sealing	
---	C.HC-MCV-2B/2	09120085412



电缆接头 用于上壳 Cable gland, for housings



螺纹 Thread	型号 Type	订货号 Part Number
M25	WNAMC-M25(D10.5-14)	19120005057
M25	WNAMC-M25(D14-17)	19120005058



	Ø (线径)	cable		SW
		min.	max.	
WNAMC-M25	10.5-14	10.5 mm	14 mm	28
WNAMC-M25	14-17	14 mm	17 mm	28

HC金属外壳(EMC) Metal Hoods & Housings(EMC)

镀镍Nickel plating 防护等级 Degree of protection : IP65


上壳 侧出线 Hoods, side entry



螺纹 Thread
M25

型号 Type
EMC.HC-SE-2B-M25

订货号 Part Number
19120080502




上壳 侧出线 高结构 上下分体式 Hoods, side entry, high construction



螺纹 Thread
M25

型号 Type
EMC.HC-SEH-2B-M25

订货号 Part Number
19120080512




上壳 顶出线 高结构 上下分体式 Hoods, top entry, high construction



螺纹 Thread
M25

型号 Type
EMC.HC-TEH-2B-M25

订货号 Part Number
19120080412




上壳 侧出线 高结构 合盖式 Hoods, side entry, high construction



螺纹 Thread
M25

型号 Type
EMC.HC-SEHS-2B-M25

订货号 Part Number
19120080528




上壳 顶出线 高结构 合盖式 Hoods, top entry, high construction



螺纹 Thread
M25

型号 Type
EMC.HC-TEHS-2B-M25

订货号 Part Number
19120080428




不封底下壳 Housings, bulkhead mounting



螺纹 Thread

型号 Type
EMC.HC-BK-1L/S


订货号 Part Number
09120080303




HC金属外壳(EMC) Metal Hoods & Housings(EMC)

镀镍Nickel plating 防护等级 Degree of protection : IP65

防护盖 Protection covers, metal




螺纹 Thread	型号 Type	订货号 Part Number
---	不带密封圈Without sealing	
	EMC.HC-MCV-2B/1	09120085413
---	带密封圈With sealing	
	EMC.HC-MCV-2B/2	09120085414



电缆接头 用于上壳 Cable gland, for housings



螺纹 Thread	型号 Type	订货号 Part Number
M25	WNAMC-M25(D10.5-14)	19120005057
M25	WNAMC-M25(D14-17)	19120005058



	Φ (线径)	cable		SW
		min.	max.	
WNAMC-M25	10.5-14	10.5 mm	14 mm	28
WNAMC-M25	14-17	14 mm	17 mm	28